

EVoline[®] Catalogue 2017



EVOLine®

Systems

Port *Push*

35
FlipTop *Push*

71
V-Port

Dock Square

43
FrameDock

75
T-Dock

Plug

49
Dock

79
Vertical

Square80

57
R-Dock

83
Decentralised
Electrical
Distribution

Port

63
U-Dock

BackFlip

67
V-Dock

Modules

Add-On

89

Modules

119

Protection
Modules

139

Express

92

Sockets

122

Interchangeable
Modules

155

Cable
Management

104

Data
Modules

135

Kinetics

163

Accessories

108

Multimedia
Modules

116

Switches &
Pushbuttons

EVoline® Port Push

NEU
NOUVEAU
NEW




The retractable rectangular solution

EVOLine[®] Port Push

The EVOLine Port Push fits virtually flush with the work surface.

By using the Push-To-Open function, the housing is released and appears above the work surface, enabling an easy pull up to connect power and data cables. With a light press of a finger, it retracts with connected leads. Slide dampers ensure a soft closing. The patented rocking cover enables a space-saving cable routing through the desk.

The Port Push modules can be assembled to customer's needs. The interchangeable data and multimedia modules allow greater flexibility, enabling future proof technology with ever changing usage requirements.

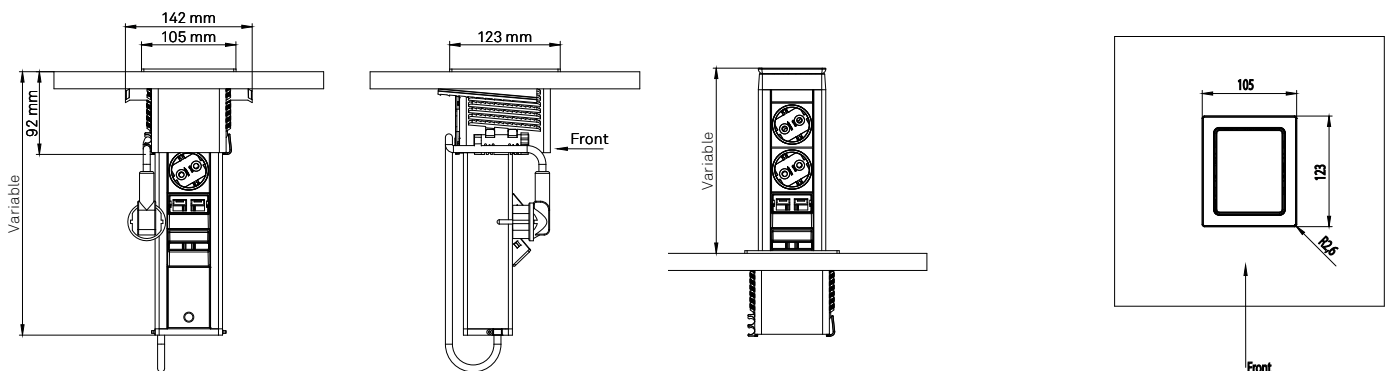

Push-Function facilitates the opening

Individual surfaces



Brushed Stainless Steel



Glass, black



Glass, white

International power socket modules



USB-Charger:
Charges all common devices with USB connection



Bespoke assembly with interchangeable modules to meet your requirements






A selection of interchangeable modules can be found on page 122.




EVoline® Port Push

Description	Picture	Specifications	Order Number
<p>EVoline Port Push</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p>	 A photograph of the EVoline Port Push device with two sockets. It features a silver anodised aluminium housing and a black plastic cover with a brushed stainless steel inlay.	<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	1593 1100 0300
<p>EVoline Port Push</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p>	 A photograph of the EVoline Port Push device with three sockets. It features a silver anodised aluminium housing and a black plastic cover with a brushed stainless steel inlay.	<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	1593 1100 0400

Description	Picture	Specifications	Order Number
<p>EVoline Port <i>Push</i> Cuisine</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>		<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	<p>1593 1100 0100</p>
<p>EVoline Port <i>Push</i> Cuisine Charger</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 1 × USB-Charger Type A* 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>		<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	<p>1593 1100 0200</p>
<p>EVoline Port <i>Push</i> DATA</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. 3 × sockets, VDE-compliant, 60°, 16 A, contact-protected. 2 × modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected. Fixed supply cable 3.0 m with angled plug.</p>		<p>Cover and collar in black plastic with brushed stainless steel inlay</p>	<p>1593 1100 0500</p>

*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market

EVoline® Port *Push*

Description	Picture	Specifications	Order Number
EVoline Port <i>Push</i> CHARGER Aluminium housing, silver anodised. For surface thickness up to 50 mm. 2 × USB- Charger Typ A* 2 × sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.		Cover and collar in black plastic with brushed stainless steel inlay	1593 1100 0600

EVoline® Port *Push* Individual

Empty Housing EVoline Port <i>Push</i> Aluminium housing, silver anodised. For surface thickness up to 50 mm.		Cover and collar in black plastic with brushed stainless steel inlay	9332 0040 0000
		Cover and collar in black plastic with frosted white glass inlay	9332 1020 0000
		Cover and collar in black plastic with glossy black glass inlay.	9332 1030 0000

Cover options



Brushed Stainless Steel



Glass, glossy black



Glass, frosted white

EVOLine® Dock Square

NEU
NOUVEAU
NEW



Variable and mobile.

EVoline[®] Dock Square

EVoline Dock Square, the new generation of on-Desk systems, provides a mobile, compact and flexible solution for the workspace.

Starting with the Dock Square Basic up to the individually configurable versions, interchangeable modules for Data and Multimedia facilitate timeless and almost unlimited flexibility as connectivity requirements evolve.

An easy adhesive fixing simplifies the installation. The adhesive connection is removable at any time enabling the Dock Square to be placed in another position. Even on Glass!





Fast fixing and removal

International socket modules

with double sided strips

Cable connections are easily accessible.

Simple cable-routing.

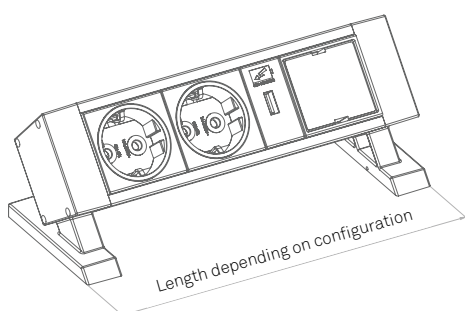

Individually configurable with interchangeable modules.
Easy and fast exchange of modules.

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

EVoline Dock Square

Aluminium housing.
2 × VDE Sockets 0°, 16 A
1 × USB-Charger
1 × Installation Space



Silver anodised

1593 8000 0100

Double sided strips.
Fixed supply cable 3.0 m
with GST18 plug

Dimensions (W × H × D):
220 × 85 × 87 mm

**Empty Housing
EVoline Dock Square**

Aluminium housing.

A variety of modules is available. Please see the chapter „EVoline Modules“



Silver anodised

9332 0720 0000

**Double Sided Strips
for EVoline Dock Square**

2× Double sided strips



9332 1050 0000

Available soon


*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.



EVOLine® Plug



reddot design award
winner 2011



Ausgezeichnet mit dem 1. Preis
International Home: Product Design
Designpreis des Landes
Nordrhein-Westfalen



Designpreis
Deutschland
2011

NOMINIERT

interior
innovation
award
2011

Winner



Ausgezeichnet with der
IENA Goldmedaille

universal
design

award 2010

universal
design

consumer
favorite 2010



Extremely thin. Fits behind any cupboard or cabinet. Prevents tripping hazards.


EVoline[®] Plug

The EVoline Plug's ultra-low profile easily fits behind any piece of furniture. The intelligent joint mechanism transforms the handle into a lever – and the plug can be easily removed from the socket. Even in case of a pull on the cable, the plug is released without damage.

EVoline Plug Fix as flat plug solution for manufacturers cannot be dismantled. Our range offers versions with endsplices, couplings, 3-gang socket rail or connectors.



reddot design award
winner 2011



bezeichnet mit dem 1. Preis
Universal Home: Product Design
Designpreis des Landes
Nordrhein-Westfalen



Designpreis
Deutschland
2011
NOMINIERT




interior
innovation
award
2011
Winner




Ausgezeichnet with der
IENA Goldmedaille



universal
design
award 2010
universal
design
consumer
favorite 2010



EVoline[®] Plug



EVoline[®] PlugFix

Description	Picture	Specifications	Order Number
<p>EVOLine Plug</p> <p>Screwable ultra-low profile Grounded plug with movable face, for wire diameters of 0.75 mm² to 1.5 mm², 250 V / 16 A</p>		<p>black</p> <p>white</p>	<p>1510 0000 0100</p> <p>1510 0000 0300</p>
<p>EVOLine PlugFix with EVOLine Express Typ 907</p> <p>with cable 3 × 1.5 mm² connected to 3 gang power bar EVOLine Express, 250 V / 16 A</p>		<p>black, with 1.5 m Cable</p> <p>white, with 1.5 m Cable</p>	<p>1510 0015 6100</p> <p>1510 0015 6300</p>
<p>EVOLine PlugFix with VDE socket coupling</p> <p>with cable 3 × 1.5 mm² connected to socket coupling with contact protection, 250 V / 16 A</p>		<p>black, with 3 m Cable</p> <p>white, with 3 m Cable</p> <p>black, with 1.5 m Cable</p> <p>white, with 1.5 m Cable</p>	<p>1510 0030 5100</p> <p>1510 0030 5300</p> <p>1510 0015 5100</p> <p>1510 0015 5300</p>
<p>EVOLine PlugFix with connector</p> <p>with cable 3 × 1.5 mm² and connector. Select from Wieland GST18 or WAGO WINSTA sockets.</p>		<p>Wieland GST 18i3 black 1.5 m Cable and socket</p> <p>WAGO WINSTA black 1.5 m Cable and socket</p>	<p>1510 0015 2100</p> <p>1510 0015 8100</p>
<p>EVOLine PlugFix with wire end ferrules</p> <p>With fixed cable 3 × 1.5 mm² with wire end ferrules. 250 V / 16 A,</p>		<p>black, with 1.5 m Cable</p> <p>white, with 1.5 m Cable</p>	<p>1510 0015 1100</p> <p>1510 0015 1300</p>



EVOLine[®] Square80







Innovative technology for the smallest of spaces.

EVoline[®] Square80

EVoline Square80 fits into standard openings that are pre-made with a diameter of 80 mm. It provides a power socket, a USB charger, and a data connection.

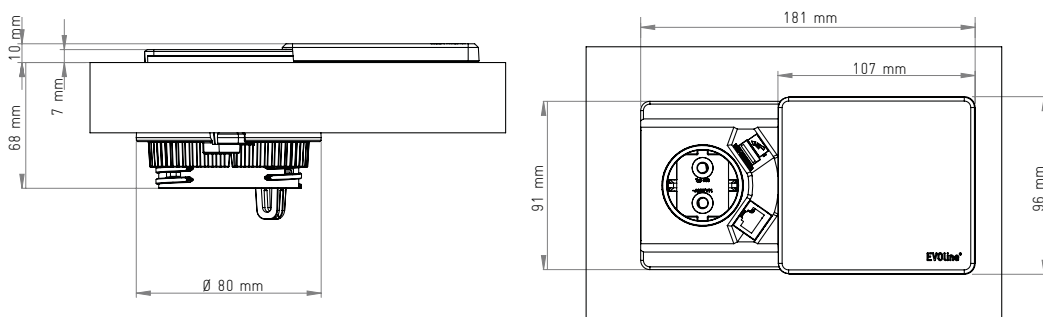

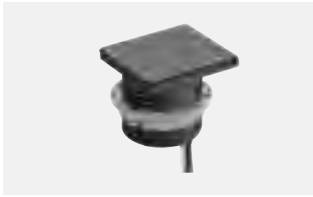
In its Qi version EVoline Square80 offers an additional inductive charging surface integrated into the cover, for charging of Qi capable mobile phones.



Description	Picture	Specifications	Order Number
<p>EVoline Square80</p> <p>For surface thickness up to 50 mm. Mounting hole \varnothing 80 mm.</p> <p>Configuration: 1x VDE-socket, 16 A, contact protected 1x USB Charger Type A *, Output voltage: 5V DC Rated output current: 1A,</p>		<p>Cover and housing black</p> <p>CAT 6 Socket 3,0 m Cable and plug</p> <p>3.0 m pull out CAT 6 patch cable</p> <p>2x USB Charger</p> <p>without data</p>	<p>1592 7000 0100</p> <p>1592 7000 0200</p> <p>1592 7001 6300</p> <p>1592 7000 0300</p>
<p>Fixed supply cable 3 m with angled plug.</p>		<p>Cover and housing white</p> <p>CAT 6 Socket 3,0 m Cable and plug</p> <p>3.0 m pull out CAT 6 patch cable</p> <p>2x USB Charger</p> <p>without data</p>	<p>1592 7000 1900</p> <p>1592 7000 2000</p> <p>1592 7001 6400</p> <p>1592 7000 2100</p>
		<p>Cover in stainless steel optics housing in black</p> <p>CAT 6 Socket 3.0 m Cable and plug</p> <p>3.0 m pull out CAT 6 patch cable</p> <p>2x USB Charger</p> <p>without data</p>	<p>1592 7000 3100</p> <p>1592 7000 3200</p> <p>1592 7001 6500</p> <p>1592 7000 3300</p>

*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.

EVoline® Square80

Description	Picture	Specifications	Order Number		
<p>EVoline Square80 with Qi Charger</p> <p>For surface thickness up to 50 mm. Mounting hole ø 80 mm.</p> <p>Configuration: 1x VDE-socket, 16 A, contact protected 1x USB Charger Type A *, Output voltage: 5V DC Rated output current: 1A,</p> <p>Fixed supply cable 3 m with angled plug.</p>		Cover and housing black			
		3,0 m Cable and plug CAT 6 Socket	1592 7000 0400	206.96 €	
		3,0 m pull out CAT 6 patch cable	1592 7000 0500	190.32 €	
			without data	1592 7000 0600	154.96 €
		Cover and housing white			
		3,0 m Cable and plug CAT 6 Socket	1592 7000 2200	212.16 €	
		3,0 m pull out CAT 6 patch cable	1592 7000 2300	195.52 €	
			without data	1592 7000 2400	160.16 €
		Cover in stainless steel optics housing in black			
3,0 m Cable and plug CAT 6 Socket		1592 7000 3400	212.16 €		
3,0 m pull out CAT 6 patch cable		1592 7000 3500	195.52 €		
		without data	1592 7000 3600	160.16 €	



EVoline® Port



red dot
design award




The retractable solution

EVoline[®] Port

EVoline Port let sockets and cables simply disappear. Just the collar and cover of the Port are visible on the work surface.

The easy pull-up motion let the high-quality aluminium body appear and subsequently a push-down motion let it disappear below the surface even with attached plugs. The patented rocking cover creates enough space for a cable outlet.

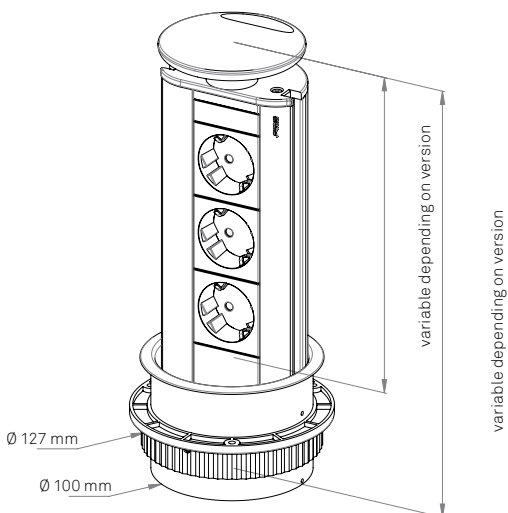

Silver
lacquered plastics



Stainless steel
in CD-Optics



White
lacquered plastics





Black
lacquered plastics





Chrome-plated
steel



Antique brass
lacquered plastics

Description	Picture	Specifications	Order Number
<p>EVOLine Port</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole \varnothing 102 mm. Two sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	<p>1593 1000 3300</p> <p>1593 1000 5200</p> <p>1593 1003 1100</p>
<p>EVOLine Port</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole \varnothing 102 mm. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p>		<p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. NIGHTLIGHT effect by blue LEDs under the rocking cover with illuminated ON/OFF switch</p> <p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. NIGHTLIGHT effect by blue LEDs under the rocking cover with illuminated ON/OFF switch</p>	<p>1593 1003 1200</p> <p>1593 1000 0100</p> <p>1593 1000 5000</p> <p>1593 1002 1600</p> <p>1593 1003 1300</p>




EVoline® Port Standard

Description	Picture	Specifications	Order Number
<p>EVoline Port Cuisine</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p>	 A cylindrical, silver anodised aluminium housing with a black base and a silver top cap. It features three vertically aligned electrical sockets on the front face.	<p>Rocking cover made of silver lacquered plastic, Collar made of grey plastic</p>	1593 1000 0600
<p>EVoline Port DATA</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole ø 102 mm. Two sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected.</p>	 A cylindrical, silver anodised aluminium housing with a black base and a silver top cap. It features two vertically aligned electrical sockets and two RJ45 ports on the front face.	<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. NIGHTLIGHT effect by blue LEDs under the rocking cover with illuminated ON/OFF switch</p>	1593 1003 1400 1593 1003 1500 1593 1003 1600 1593 1003 1700

Description	Picture	Specifications	Order Number
<p>EVOLine Port DATA</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole \varnothing 102 mm. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT 6 shielded, 1:1 interconnected.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics. NIGHTLIGHT effect by blue LEDs under the rocking cover with illuminated ON/OFF switch</p>	<p>1593 1003 1800</p> <p>1593 1003 1900</p> <p>1593 1003 2000</p> <p>1593 1003 2100</p>
<p>EVOLine Port USB CHARGER*</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole \varnothing 102 mm. Two sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p> <p>1x USB Type A Charger, rated output current: 1 A</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	<p>1593 1040 0200</p> <p>1593 1040 0300</p> <p>1593 1040 0400</p>
<p>EVOLine Port 2x USB CHARGER</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole \varnothing 102 mm. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug.</p> <p>2x USB Type A Charger, rated output current: 1 A</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics</p>	<p>1593 1038 4100</p> <p>1593 1038 7100</p> <p>1593 1038 7200</p>

*The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.

EVoline® Port Individuell

Description	Picture	Specifications	Order Number
Empty Housing EVoline Port		Rocking cover and collar made of silver lacquered plastic	9330 1830 0000
Aluminium housing, silver anodised. For surface thickness up to 50 mm. Mounting hole \varnothing 102 mm.		Rocking cover made of solid stainless steel in CD design, collar made of plastic, lacquered in stainless steel optics	9330 1360 0000
Empty Housing EVoline Port CLASSIC		Rocking cover and collar made of antique brass lacquered plastic	9330 2710 0000
Aluminium housing, plated inn antique brass colour. For surface thickness up to 50 mm. Mounting hole \varnothing 102 mm			
Empty Housing EVoline Port CHROME		Rocking cover made of chromed steel, collar made of black lacquered plastic	9330 2750 0000
Chrome plated aluminium housing. For surface thickness up to 50 mm. Mounting hole \varnothing 102 mm.			

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

**Empty Housing EVoline Port
BLACK**

Aluminium housing,
black anodised.
For surfaces thickness
up to 50 mm.
Mounting hole \varnothing 102 mm.




Rocking cover and collar made
of black lacquered plastic

9330 5560 0000

Nightlight LED Modul

For all EVoline Ports
LEDs underneath rocking cover



Light colour: night blue

9330 3830 0000

Light colour: ruby red

9330 3840 0000

Light colour: emerald green

9330 5790 0000

Light colour: soft white

9331 0260 0000

Configuration examples



EVoline® BackFlip



reddot design award
winner 2015



GOOD
DESIGN







Enhanced protection for the home.

EVoline® BackFlip


The EVolineBackFlip sits nearly flush on the work surface - when closed - the giving enhanced protection against liquid spillages. At a touch of a finger, it turns 180 degrees to reveal 2x power sockets and a USB charger.

The raised position provides further protection against spillages. With a total installation height of just 53 mm, the BackFlip can be fitted above most drawers, including a cutlery drawer.

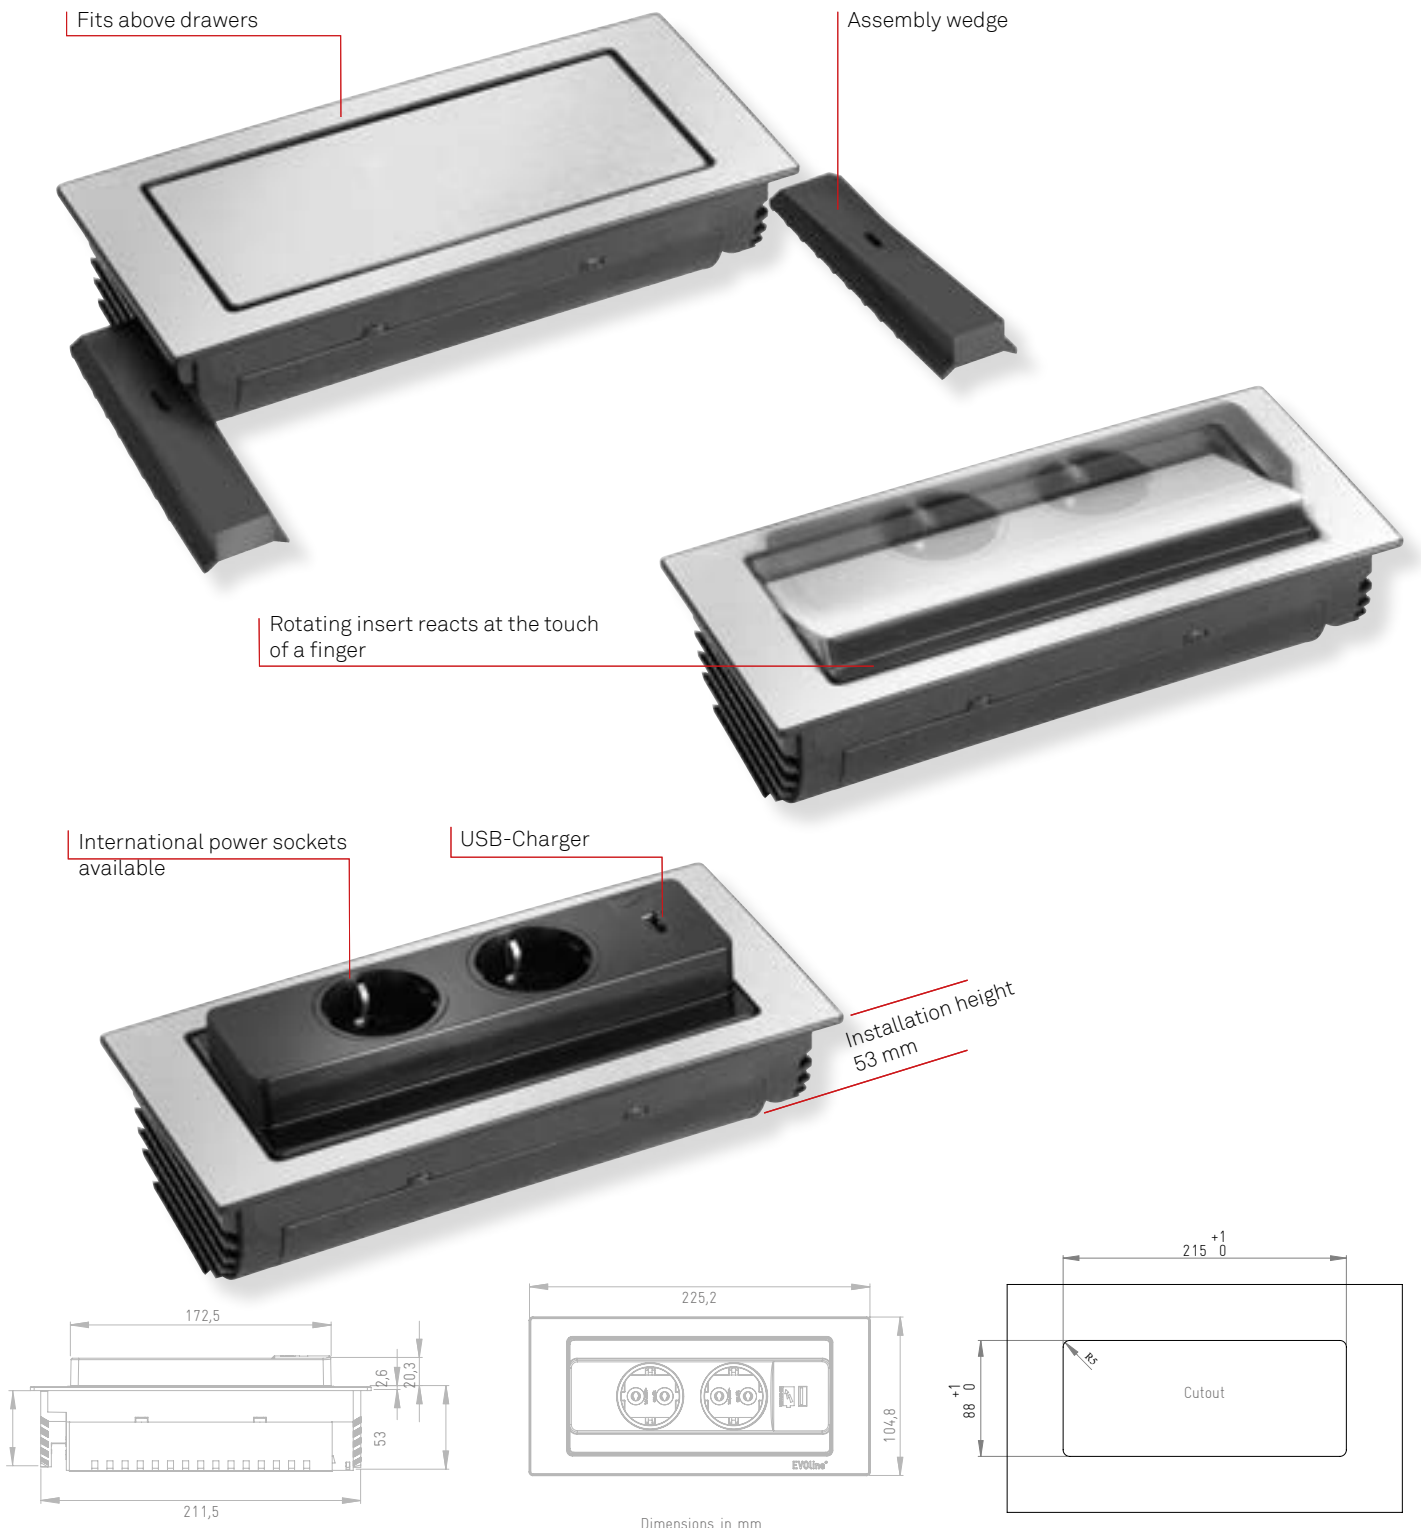

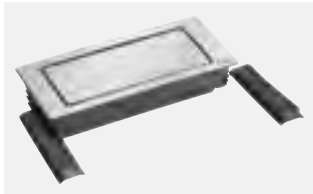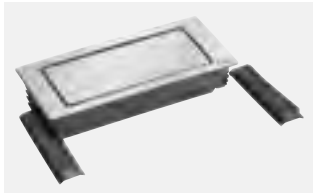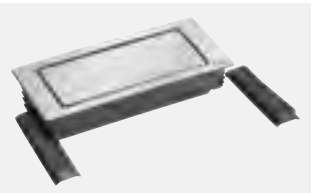Description	Picture	Specifications	Order Number
<p>EVoline BackFlip</p> <p>For surface thickness up to 40 mm. Housing for electrical connections in black plastic. Overall installation height: 53 mm</p> <p>Configuration: 2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, rated output current: 1 A, Fixed Power Supply Cable 3.0 m with angled plug.</p>		Decor: Brushed Stainless Steel	1592 7100 0200
		Decor: Glass, frosted white	1592 7100 2000
		Decor: Glass, glossy black	1592 7100 2100
		Decor: matt white lacquered	1592 7100 5000
		Decor: matt black lacquered	1592 7100 5100
<p>EVoline BackFlip mit EVoline PlugFix</p> <p>For surface thickness up to 40 mm. Housing for electrical connections in black plastic. Overall installation height: 53 mm</p> <p>Configuration: 2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, rated output current: 1 A, Fixed Power Supply Cable 3.0 m with EVoline PlugFix.</p>		Decor: Brushed Stainless Steel	1592 7100 0900
		Decor: Glass, frosted white	1592 7100 2200
		Decor: Glass, glossy black	1592 7100 2300
<p>EVoline BackFlip CUISINE mit Schutzkontaktstecker</p> <p>For surface thickness up to 40 mm. Housing for electrical connections in black plastic. Overall installation height: 53 mm</p> <p>Configuration: 2 × sockets, VDE-compliant, 0°, 16 A, contact-protected 1 × USB Type A Charger, rated output current: 1 A, Fixed Power Supply Cable 2.5 m Plug supplied unattached</p>		Decor: Brushed Stainless Steel	1592 7100 0100
		Decor: Glass, frosted white	1592 7100 1800
		Decor: Glass, glossy black	1592 7100 1700
		Decor: matt white lacquered	1592 7100 5200
		Decor: matt black lacquered	1592 7100 5300

Surface variants

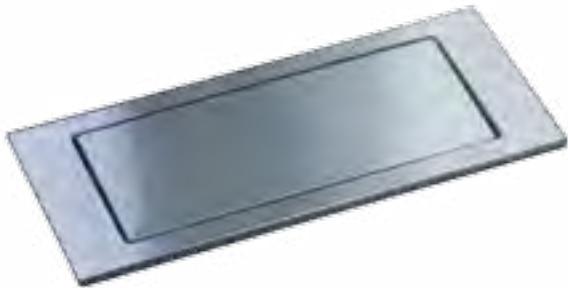

Brushed stainless steel



Steel: matt black lacquered



Glass: glossy black



Steel: matt white lacquered



Glass: frosted white

EVoline® FlipTop Push



A touch of a finger is sufficient.

EVoline® FlipTop Push


The FlipTop Push is an elegant solution supplying all work areas with power, data and multimedia.

Interchangeable modules for data and multimedia ensure unlimited flexibility for future requirements at the workspace.


Push-to-open function.
Final open position with
locking mechanism allows
easy insertion of plugs.



Quick installation

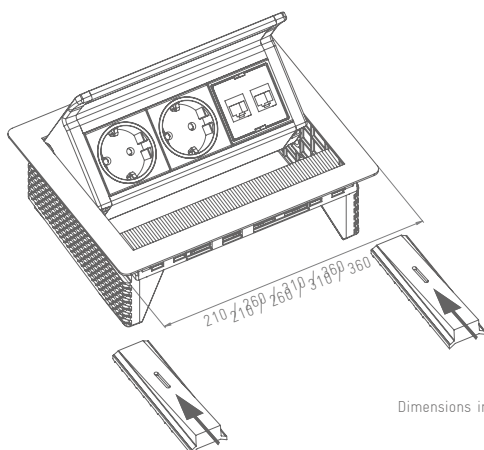


Dimensions in mm.

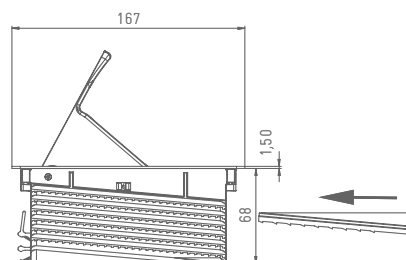

International power socket modules



Simple and quick exchange of modules. Customisable with interchangeable modules.

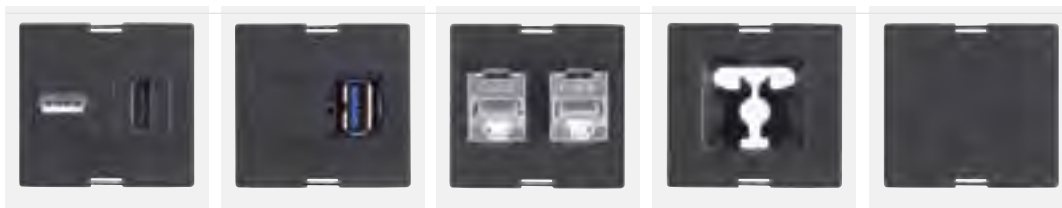

Interchangeable Modules
see page 122



Flexible, exchangeable cable outlet module

Quick installation, for surface thickness up to 50 mm





Adaptor clip for safe connection to WireLane



Convenient cable routing ensures tidiness below the table



EVoline® FlipTop Push

Description	Picture	Specifications	Order Number
<p>EVoline FlipTop Push S</p> <p>3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. For surface thickness up to 50 mm.</p> <p>Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium</p> <p>Cover and frame top made of brushed stainless steel</p>	1593 7002 4900
<p>EVoline FlipTop Push Data S</p> <p>Two sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. 2× modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. For surface thickness up to 50 mm.</p> <p>Installation dimensions: 157 × 195 mm</p>		<p>Housing made of black anodised aluminium</p> <p>Cover and frame top made of brushed stainless steel</p>	1593 7002 8100

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

EVOLine FlipTop *Push* M

4× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. For surface thickness up to 50 mm.

Installation dimensions:
157 × 245 mm



Housing made of black anodised aluminium,

Cover and frame top made of brushed stainless steel

1593 7000 2700

EVOLine FlipTop *Push* Data M

3× sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. For surface thickness up to 50 mm.

Installation dimensions:
157 × 245 mm









Housing made of black anodised aluminium,

Cover and frame top made of brushed stainless steel

1593 7000 0200

EVoline® FlipTop *Push* Individual

Description	Picture	Specifications	Order Number
<p>Empty Housing EVoline FlipTop <i>Push</i> S</p> <p>For 3 modules Housing made of black anodised aluminium, For work surface thickness up to 50 mm. Installation dimensions: 157 × 195 mm</p>		<p>Cover and frame top made of brushed stainless steel</p> <p>Cover and frame top black powder-coated</p> <p>Cover and frame top white powder-coated</p>	<p>9331 8010 0000</p> <p>9331 9360 0000</p> <p>9331 9630 0000</p>
<p>Empty Housing EVoline FlipTop <i>Push</i> M</p> <p>For 4 modules Housing made of black anodised aluminium, For work surface thickness up to 50 mm. Incl. WireLane Adaptor Installation dimensions: 157 × 245 mm</p>		<p>Cover and frame top made of brushed stainless steel</p> <p>Cover and frame top black powder-coated</p> <p>Cover and frame top white powder-coated</p>	<p>9331 8020 0000</p> <p>9331 9370 0000</p> <p>9331 9640 0000</p>
<p>Empty Housing EVoline FlipTop <i>Push</i> L</p> <p>For 5 modules Housing made of black anodised aluminium, For surface thickness up to 50 mm. Incl. WireLane Adaptor Installation dimensions: 157 × 295 mm</p>		<p>Cover and frame top made of brushed stainless steel</p> <p>Cover and frame top black powder-coated</p> <p>Cover and frame top white powder-coated</p>	<p>9331 8030 0000</p> <p>9331 9380 0000</p> <p>9331 9650 0000</p>
<p>Empty Housing EVoline FlipTop <i>Push</i> XL</p> <p>For 6 Modules Housing made of black anodised aluminium, For surface thickness up to 50 mm. Incl. WireLane Adaptor</p> <p>Installation dimensions: 157 × 345 mm</p>		<p>Cover and frame top made of brushed stainless steel</p> <p>Cover and frame top black powder-coated</p> <p>Cover and frame top white powder-coated</p>	<p>9331 8040 0000</p> <p>9331 9390 0000</p> <p>9331 9660 0000</p>

Description	Picture	Specifications	Order Number
<p>EVOLine WireLane Adaptor</p> <p>To connect WireLane to FlipTop <i>Push</i>.</p>		black	1599 0910 3300
<p>EVOLine FlipTop <i>Push</i> TRAY</p> <p>black powder-coated. For protection and cover below the table. Also applicable as cable tray.</p>		<p>for FlipTop <i>Push</i> S</p> <p>for FlipTop <i>Push</i> M</p> <p>for FlipTop <i>Push</i> L</p> <p>for FlipTop <i>Push</i> XL</p>	<p>9331 9100 0000</p> <p>9331 9110 0000</p> <p>9331 9120 0000</p> <p>9331 9130 0000</p>

EVoline® FrameDock






A flexible modular system for various applications.



EVoline[®] FrameDock

EVoline FrameDock is a flush fitting system which can be installed horizontally or vertically - be it on a desk, a kitchen worktop, a wall, or a side of a piece of furniture. It can be mounted almost everywhere due to its low mounting depth of 51 mm and installation from the top:

High quality design, customisable components and yet discreet.

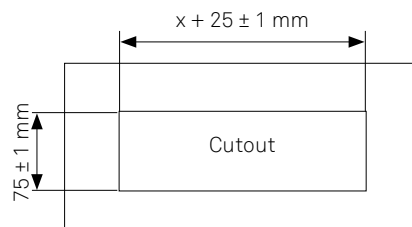
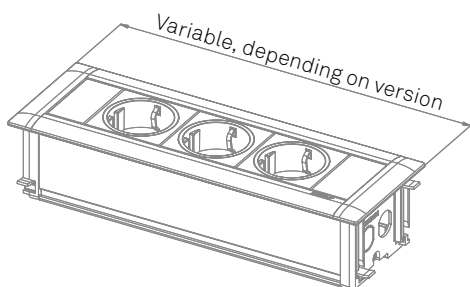


Beispiele zur Stromversorgungsgeodes Docks:


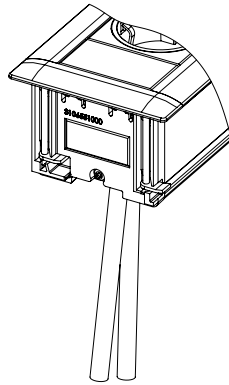
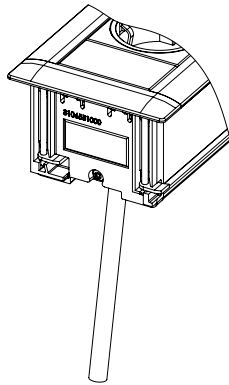


Fixed Power Supply Cable through the bottom of the profile

Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector



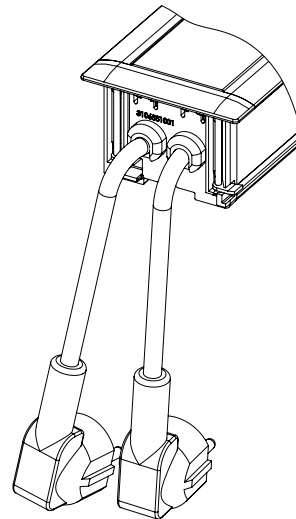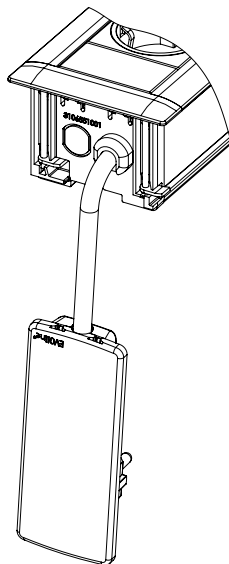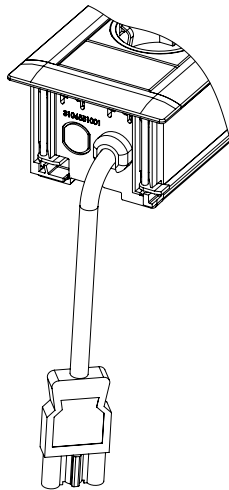

End cap with power input or output connector, depending on the surface thickness (max. 18 mm)




End cap with fixed power supply cable, depending on the surface thickness (max. 18 mm)

Available with several country specific plugs, EVOLine Plug, wire end ferrules, GST 18- or WAGO WINSTA connector.

Description	Picture	Specifications	Order Number
<p>EVoline FrameDock SMALL</p> <p>Aluminium housing, silver anodised, for surface thickness up to 38 mm. 3 sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Powersupply cable entry left side in the bottom of the profile.</p>		<p>Profile silver anodised Screw covers black plastic</p> <p>Profile black Screw covers black plastic</p> <p>Profile white Screw covers white plastic</p>	<p>1596 1000 0900</p> <p>1596 1001 9500</p> <p>1596 1001 7900</p>
<p>EVoline FrameDock DATA SMALL</p> <p>Aluminium housing, silver anodised, for surface thickness up to 38 mm. 3 sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power and data cable entry in the bottom of the profile.</p>		<p>Profile silver anodised Screw covers black plastic</p> <p>Profile black Screw covers black plastic</p> <p>Profile white Screw covers white plastic</p>	<p>1596 1000 1000</p> <p>1596 1001 9600</p> <p>1596 1001 8000</p>

Configuration examples

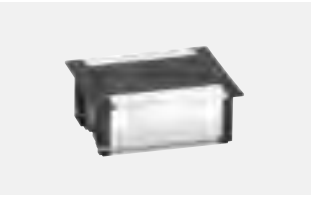

Description	Picture	Specifications	Order Number
<p>Empty Housing FrameDock</p> <p>For surface thickness up to 38 mm</p>		<p>Profile silver anodised Screw covers black plastic</p> <p>Profile Silver anodised; Screw covers silver lacquered plastic</p> <p>Profile black anodised Screw covers black plastic</p> <p>Profile white powder-coated Screw covers white plastic</p>	<p>9331 2180 0000</p> <p>9331 2550 0000</p> <p>9331 5330 0000</p> <p>9331 3540 0000</p>

EVOLine® Interchangeable Modules FrameDock

Simple and quick exchange of modules. Customisable with interchangeable modules.



The FrameDock can be individually equipped with power, data and multimedia modules.

For further requirements at the workspace, data and multimedia connections and cables are exchangeable without removing the FrameDock.

In the chapter „Interchangeable Modules“ (p.122) you can find the right modules for your personal FrameDock, usable as well in FlipTop *Push* or Dock Square.



EVoline[®] Dock





Above desk quality for home, office, hotel.


EVoline[®] Dock

EVoline Dock sits above the desk allowing maximum workspace. Various fixing options are available like EVoline Quicklock, clamps, pillars, etc.

The configurable charging and data station can be equipped with the complete EVoline Modules range.




Examples of power supply options:

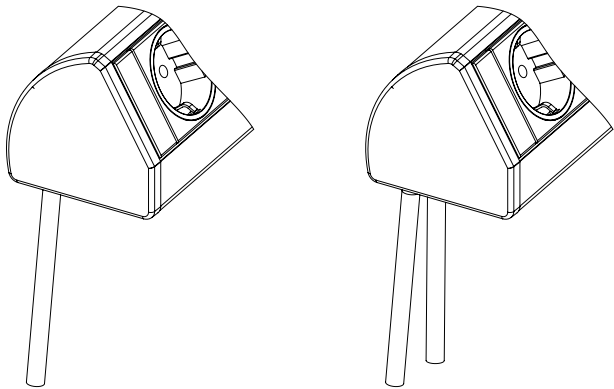

Fixed Power Supply Cable through the bottom of the profile


Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector

Color of the end caps painted to match the profiles color.

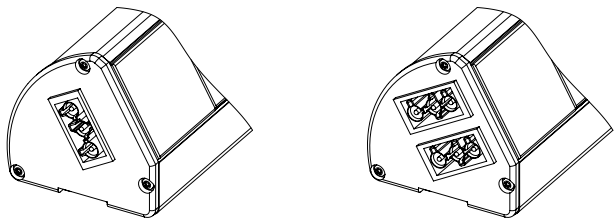

End cap with power input and/or output connector, depending on the surface thickness (max. 18 mm)

End cap colour: black

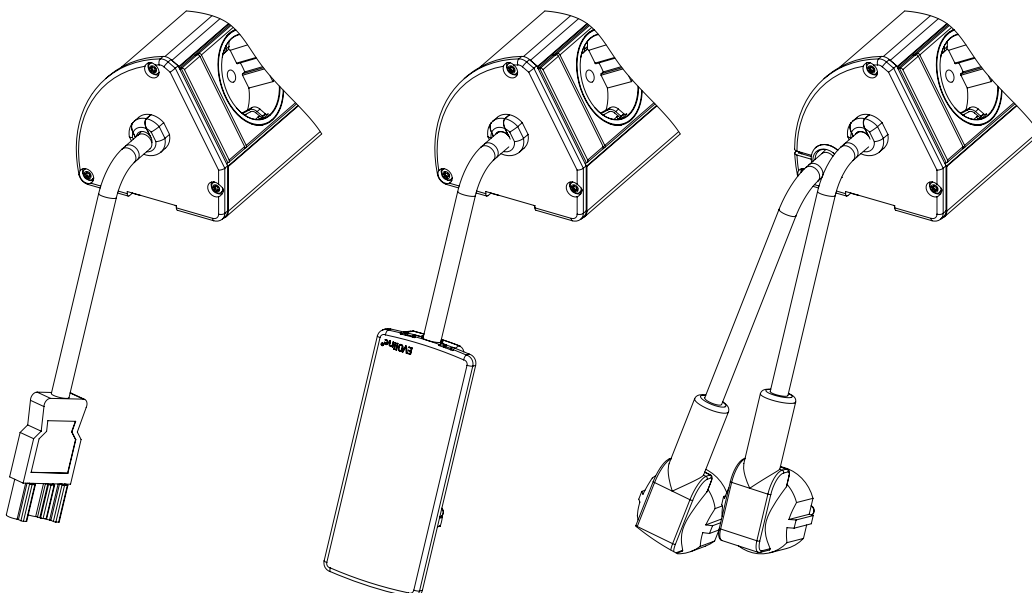




End cap with fixed power supply cable.

Available with several country specific plugs, EVOLine Plug, wire end ferrules, GST 18 or WAGO WINSTA Connector.

Color of the end caps: black

EVoline® Dock

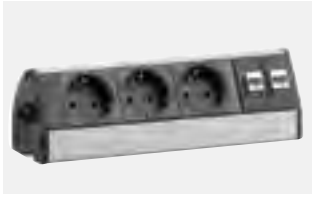Description	Picture	Specifications	Order Number
<p>EVoline Dock CUISINE</p> <p>Aluminum housing, anodised in colour stainless steel (ALANOX®) End caps lacquered to match the frame color, supplied unattached. Outlet receptacles painted to match the color profile. Outlet receptacles painted to match the color profile. 3× VDE sockets with 2.5 m supply cable with wire end ferrules. VDE plug supplied unattached. Mounting set for under desk installation attached.</p>		<p>Stainless steel anodised (ALANOX®)</p>	1593 0368 3600
<p>EVoline Dock DESK</p> <p>Aluminium housing, free positioning with provided slide stops. 3 sockets, VDE compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry in the left end cap.</p>		<p>Silver anodised</p> <p>Black anodised</p> <p>White powder-coated</p>	<p>1593 0004 0300</p> <p>1593 0004 0100</p> <p>1593 0004 0700</p>
<p>EVoline Dock DESK DATA</p> <p>Aluminium housing, free positioning with provided slide stops. 3 sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power supply cable entry in the left end cap.</p>		<p>Silver anodised</p> <p>Black anodised</p> <p>White powder-coated</p>	<p>1593 0047 8300</p> <p>1593 0047 8100</p> <p>1593 0047 8700</p>

Description	Picture	Specifications	Order Number
-------------	---------	----------------	--------------

EVoline Dock SMALL

Aluminium housing,
3 sockets, VDE compliant,
0°, 16 A, contact-protected.
Fixed supply cable 3.0 m with
angled plug.
Power supply cable entry left side in
the bottom of the profile.



With 2 mounting clamps for surfaces thickness 8 – 40mm

Silver anodised	1593 0066 6300
Black anodised	1593 0066 6100
White powder-coated	1593 0066 6700

Without mounting clamps

Silver anodised	1593 0003 9300
Black anodised	1593 0003 9100
White powder-coated	1593 0003 9700

EVoline Dock DATA SMALL

Aluminium housing, 3 sockets, VDE-
compliant,
0°, 16 A, contact-protected.
Fixed supply cable 3.0 m with
angled plug.
Two modular couplings RJ45 to
RJ45 CAT6 shielded,
1:1 interconnected. Power and data
cable entry in the bottom of the
profile.



With 2 mounting clamps for surfaces thickness 8 – 40mm

Silver anodised	1593 0066 2300
Black anodised	1593 0066 2100
White powder-coated	1593 0066 2700







With QuickLock Pro 150 mm

Silver anodised	1593 0389 7300
Black anodised	1593 0389 7100
White powder-coated	1593 0389 7700

Without mounting clamps

Silver anodised	1593 0047 7300
Black anodised	1593 0047 7100
White powder-coated	1593 0047 7700

EVoline® Dock

Description	Picture	Specifications	Order Number
<p>Empty Housing EVoline Dock BLACK</p> <p>Aluminium housing Cable entry through end cap or profile.</p>		Black anodised	9330 1811 0000
<p>Empty Housing EVoline Dock SILVER</p> <p>Aluminium housing Cable entry through end cap or profile.</p>		Silver anodised	9330 1810 0000
<p>Empty Housing EVoline Dock STAINLESS</p> <p>Aluminium housing Cable entry through end cap or profile.</p>		Stainless steel alike anodised (ALANOX®)	9330 8450 0000
<p>Empty Housing EVoline Dock WHITE</p> <p>Aluminium housing Cable entry through end cap or profile.</p>		White powder-coated End caps plastic laquered to match (in case cable entry through the profile)	9331 3530 0000


Configuration examples:



Surface variants:




Black



Silver



ALANOX®



White


To choose fixing accessories, please see chapter „Accessories, Fixings“




Mounting Clamp



Mounting Clamp,
white



Mounting set for
cabinet
installation



Mounting set for
desk installation



Stainless steel
pillar



Stainless steel
mounting clamp



Quicklock /
Quicklock Pro



EVoline® R-Dock





Contemporary and modern for all workspaces.


EVoline[®] R-Dock

EVoline R-Dock can be installed into any right-angled corner.

With its flat back and angled front fascia, it is comfortable to use. Freely configurable.




Examples of power supply options:

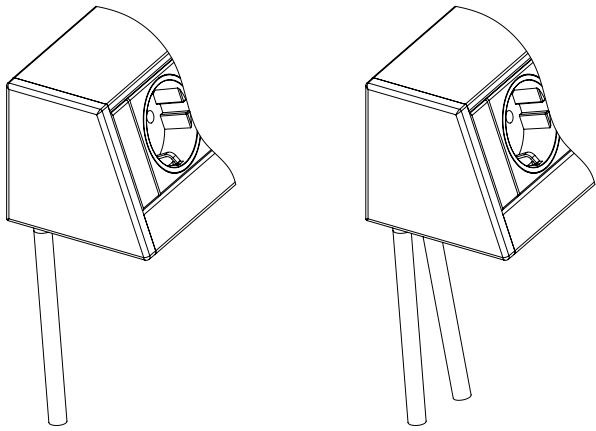


Fixed Power Supply Cable through the bottom of the profile

Available with several country specific plugs, with wire end ferrules, Wieland GST 18i3, or WAGO WINSTA Connector

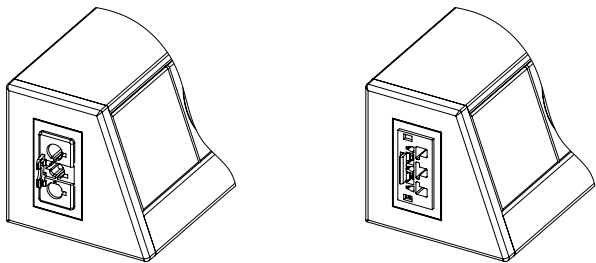

End cap with power input or output connector, depending on the surface thickness (max. 18 mm)

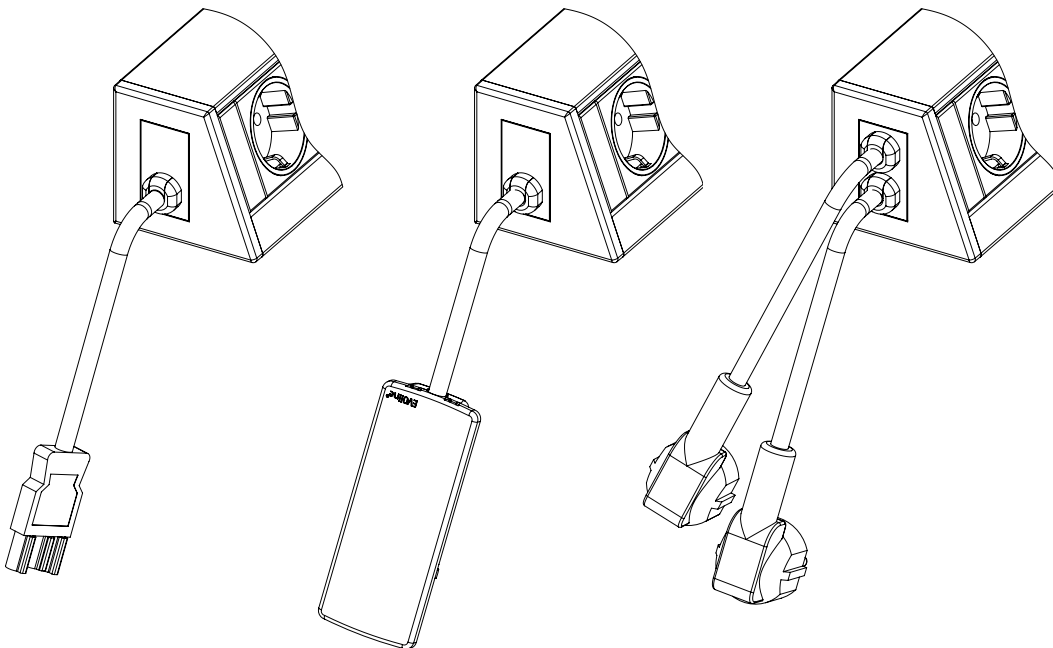


End cap with fixed power supply cable

Available with several country specific plugs, EVOLine Plug, wire end ferrules, Wieland GST 18i3- or WAGO WINSTA Connector.

EVoline® R-Dock


Description	Picture	Specifications	Order Number
EVoline R-Dock SMALL* Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Power supply cable entry on the left side in the bottom of the profile.		Silver anodised White powder-coated	1598 0000 1700 1598 0000 8600
EVoline R-Dock DATA SMALL* Aluminium housing, 3× sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable 3.0 m with angled plug. Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Power and data cable entry in the bottom of the profile.		Silver anodised White powder-coated	1598 0000 1800 1598 0000 8700

EVoline® R-Dock Individual

Empty Housing EVoline R-Dock* Aluminium housing. Power supply cable entry through end cap or profile.		Silver anodised	9331 0620 0000
Empty Housing EVoline R-Dock* Aluminium housing. Power supply cable entry through end cap or profile.		White powder-coated End caps lacquered to match housing colour (if cable entry is through the profile)	9331 4340 0000

* Delivery without mounting accessories.

Surface variants:



Silver
anodised




White
powder coated


To choose the fixing accessories, please see chapter „Accessories, Fixing“



Mounting Clamp



Mounting set for
desk installation



Mounting set for
cabinet
installation



Stainless steel
clamp




Stainless steel
pillar



Mounting Clamp,
white



Quicklock
Quicklock Pro

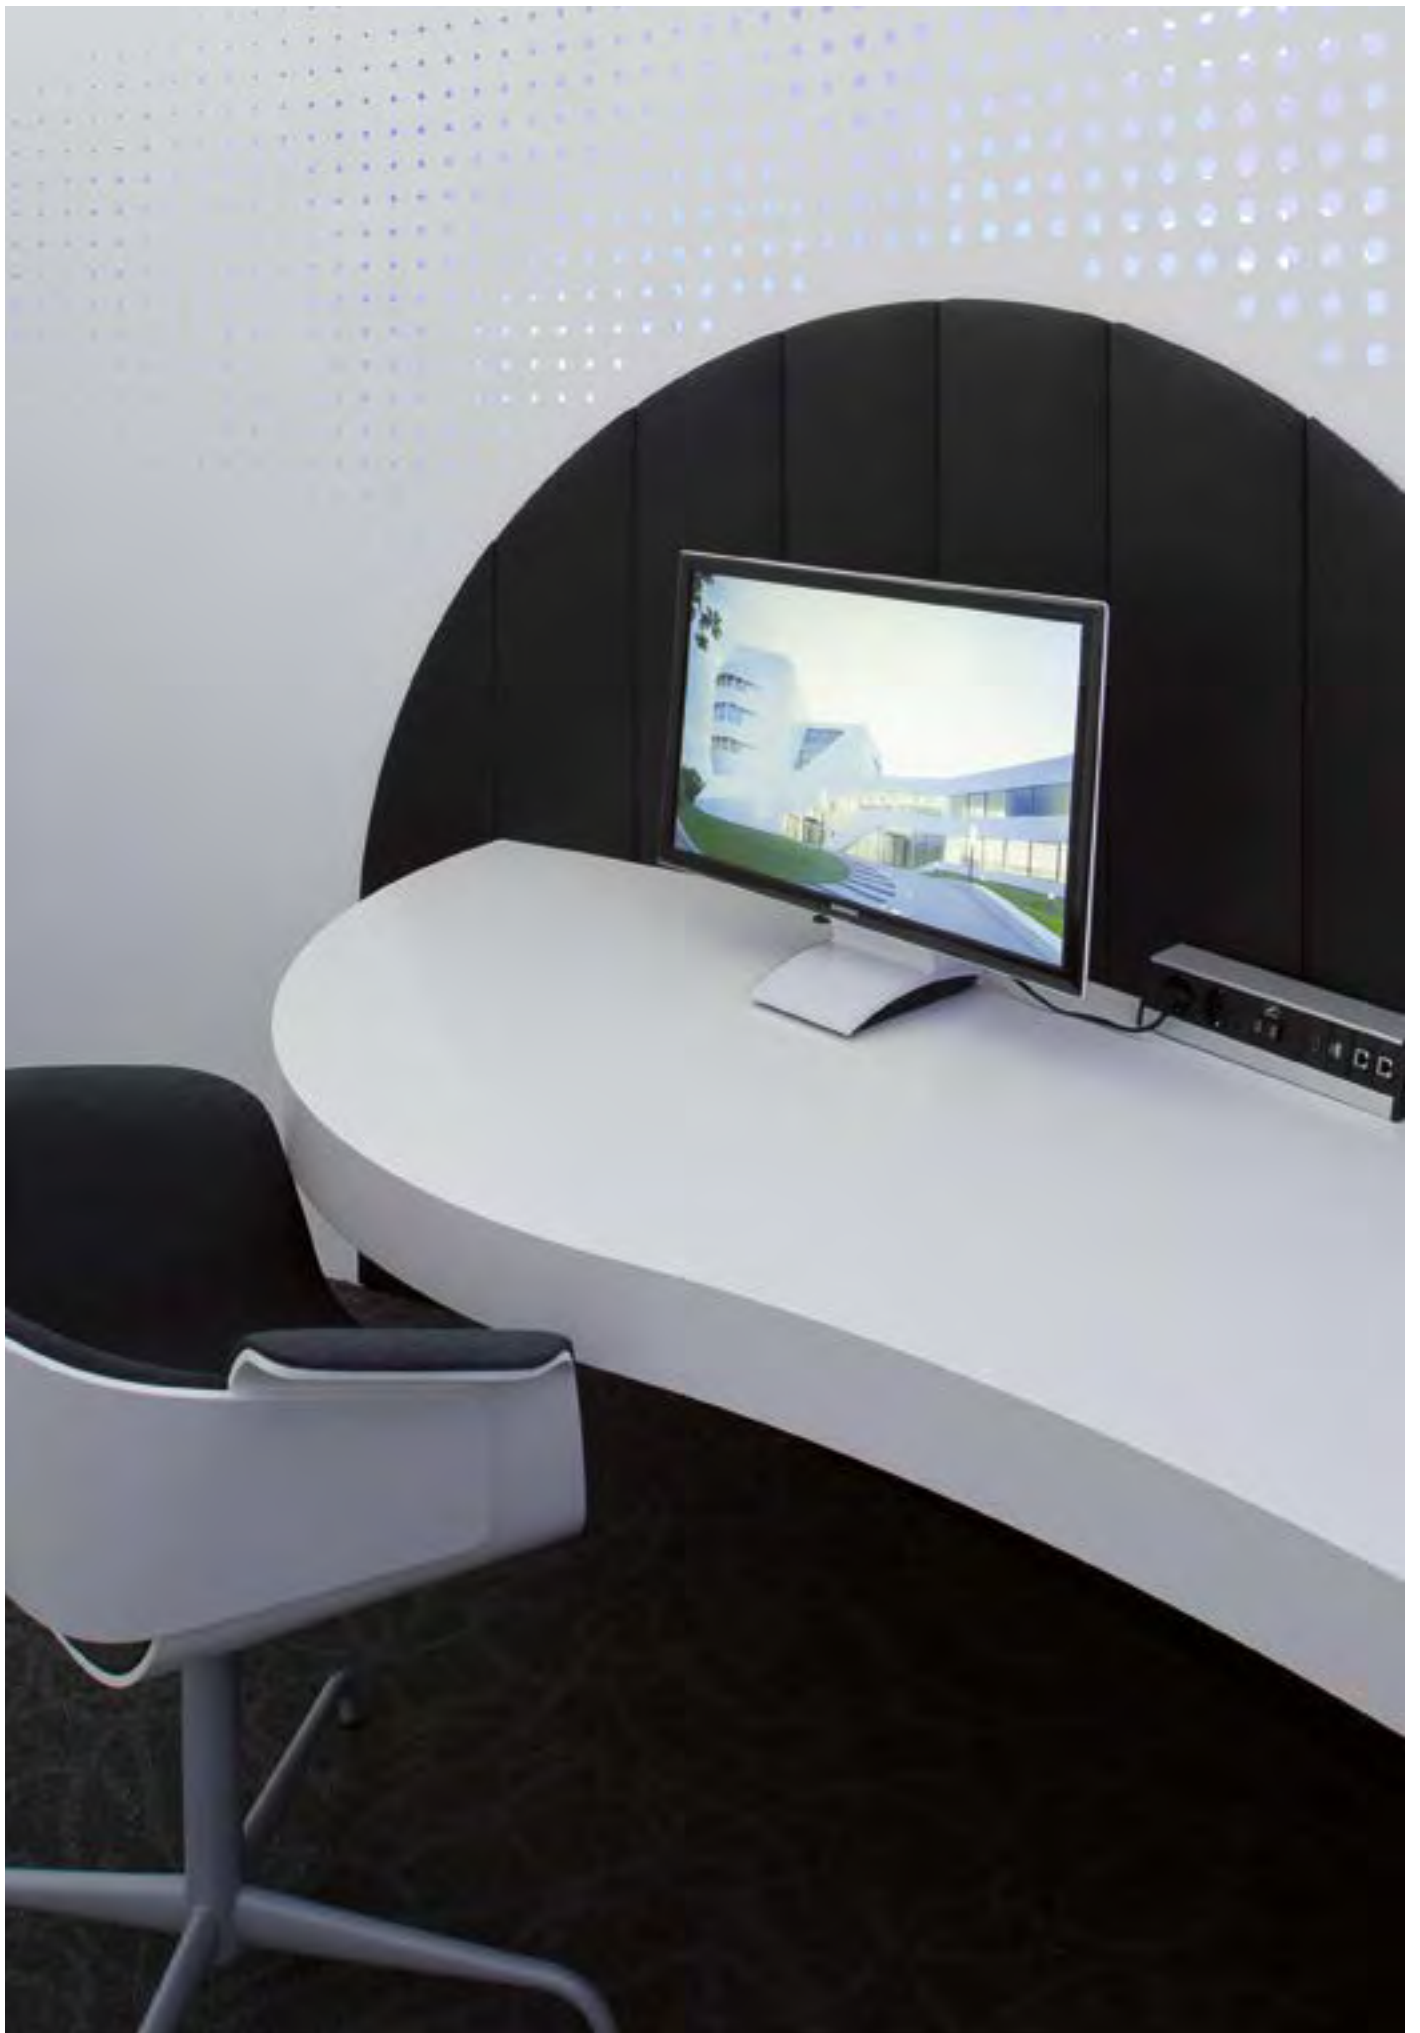

EV0line[®] U-Dock





Underdesk. Robust. Save.



EVoline[®] U-Dock

EVoline U-Dock can be mounted to any work surface in various ways.




As a robust base for a professional power and data supply, the freely configurable aluminium profile can be equipped with various power and data modules as well as safety devices for protection of personnel and machinery.

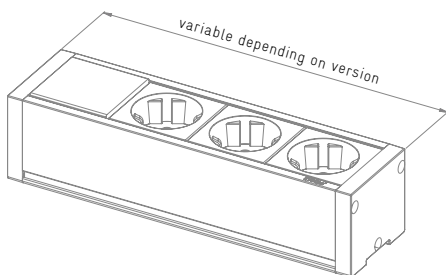

Examples of power supply options:





End cap with power input and/or output connector.

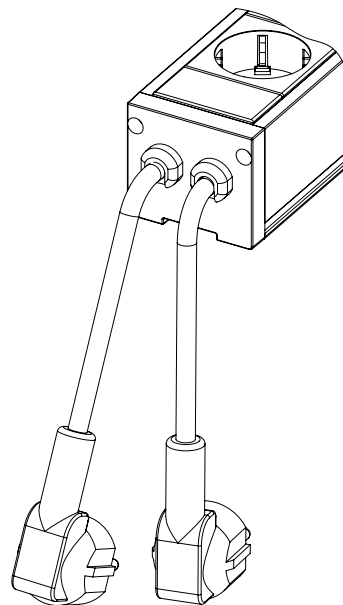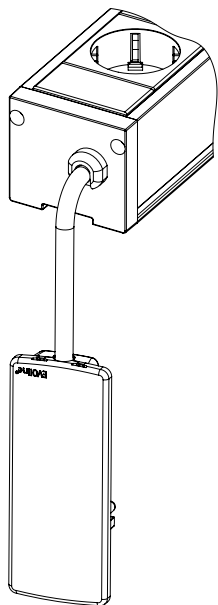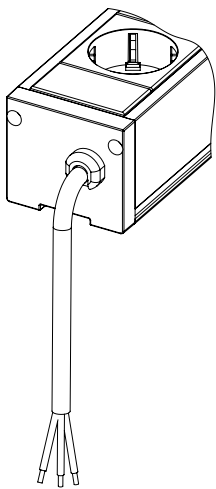

End cap with fixed power supply cable.





Available with several country specific plugs, EVoline Plug, wire end ferrules, Wieland GST 18i3- or WAGO WINSTA Connector.

End cap colour: black



All above mentioned U-Dock end caps are available with or without mounting angles.

EVoline® U-Dock

Description	Picture	Specifications	Order Number
<p>EVoline U-Dock SMALL</p> <p>Aluminium housing, 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input- and output connector GST18i3 plug and GST18i3 socket.</p>		<p>Silver anodised with mounting angles</p>	<p>1596 0000 9500</p>
<p>EVoline U-Dock DATA SMALL</p> <p>Aluminium housing, 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Power input- and output connector GST18i3 plug and GST18i3 socket.</p> <p>Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected. Entry for data cables in the opposite end cap.</p>		<p>Silver anodised with mounting angles</p>	<p>1596 0000 5900</p>
		<p>Silver anodised without mounting angles</p>	<p>1596 0000 3300</p>
<h2>EVoline® U-Dock Individual</h2>		<p>Silver anodised</p> <p>End caps optionally with or without mounting angles</p>	<p>9330 8510 0000</p>

Configuration Examples:



EVoline[®] V-Dock




Space saving.

EVoline[®] V-Dock


The EVoline V-Dock gives dead corners a benefit.

It can be installed horizontally or vertically and is variable in length. In addition, the supply cable is concealed using the space between the back of the profile and the wall corner.




Thanks to the V-Docks 45 degree alignment power and data cables are easy to connect.



Examples for power supply of the V-Docks:

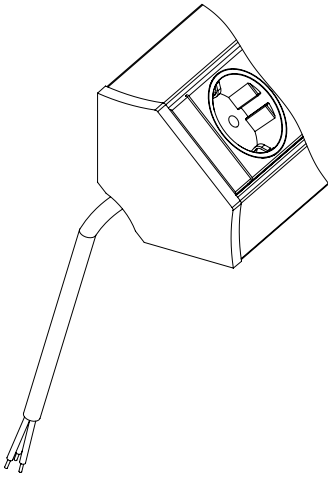



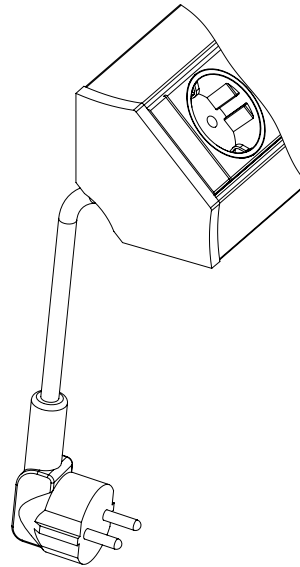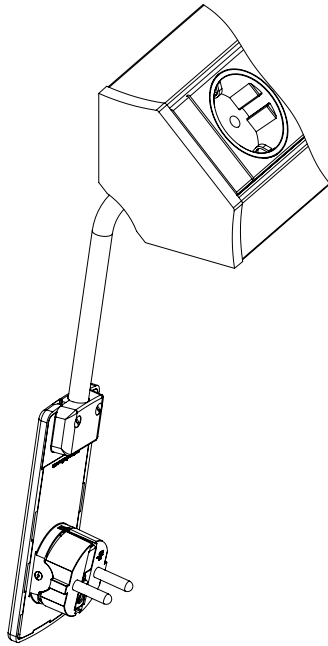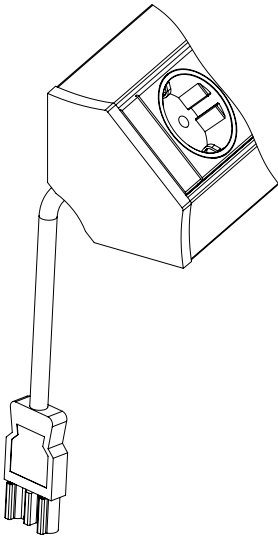

Fixed power supply cable
in the bottom of the profile with
wire end ferrules.



Fixed power supply cable
in the bottom of the profile

Available with several country
specific plugs, EVOLINE Plug,
Wieland GST 18i3 or
WAGO WINSTA Connector

EVoline® V-Dock

Description	Picture	Specifications	Order Number
<p>EVoline V-Dock CUISINE</p> <p>Aluminium housing, 3 sockets, VDE-compliant, 0°, 16 A, contact-protected.</p> <p>Fixed supply cable 2.5 m with wire end ferrules, plug supplied unattached.</p> <p>Incl. profile bracket 100 mm.</p>		Silver anodised	1593 6000 1300
<p>EVoline V-Dock DATA SMALL</p> <p>Aluminium housing, 3 sockets, VDE-compliant, 0°, 16 A, contact-protected.</p> <p>Fixed supply cable 3 m with angled plug.</p> <p>Two modular couplings RJ45 to RJ45 CAT6 shielded, 1:1 interconnected.</p> <p>Incl. 2 profile brackets 100 mm.</p>		Silver anodised	1593 6000 2300
<h2>EVoline® V-Dock Individual</h2>			
<p>Empty housing EVoline V-Dock</p> <p>Aluminium housing</p> <p>From a length of 250 mm, 2 profile brackets of 100 mm are required for fixing.</p>		Silver anodised	9330 5600 0000
<p>Empty housing EVoline V-Dock</p> <p>Aluminium housing</p> <p>From a length of 250 mm, 2 profile brackets of 100 mm are required for fixing.</p>		Black anodised	9331 5850 0000

EVOLine® V-Port



reddot design award
winner 2015



DESIGN
AWARD
2015



GERMAN
DESIGN
AWARD
SPECIAL
2016




Connectivity for corners everywhere.

EVoline® V-Port

In kitchens, you often find unused space underneath a wall cabinet, in corners and next to tall cupboards. This is where the EVoline V-Port can be installed.

In its closed position, the V-Port is concealed behind a discreet and elegant aluminium cover in stainless steel optics. A gentle touch releases a multiple socket rail. As option available with USB charger.

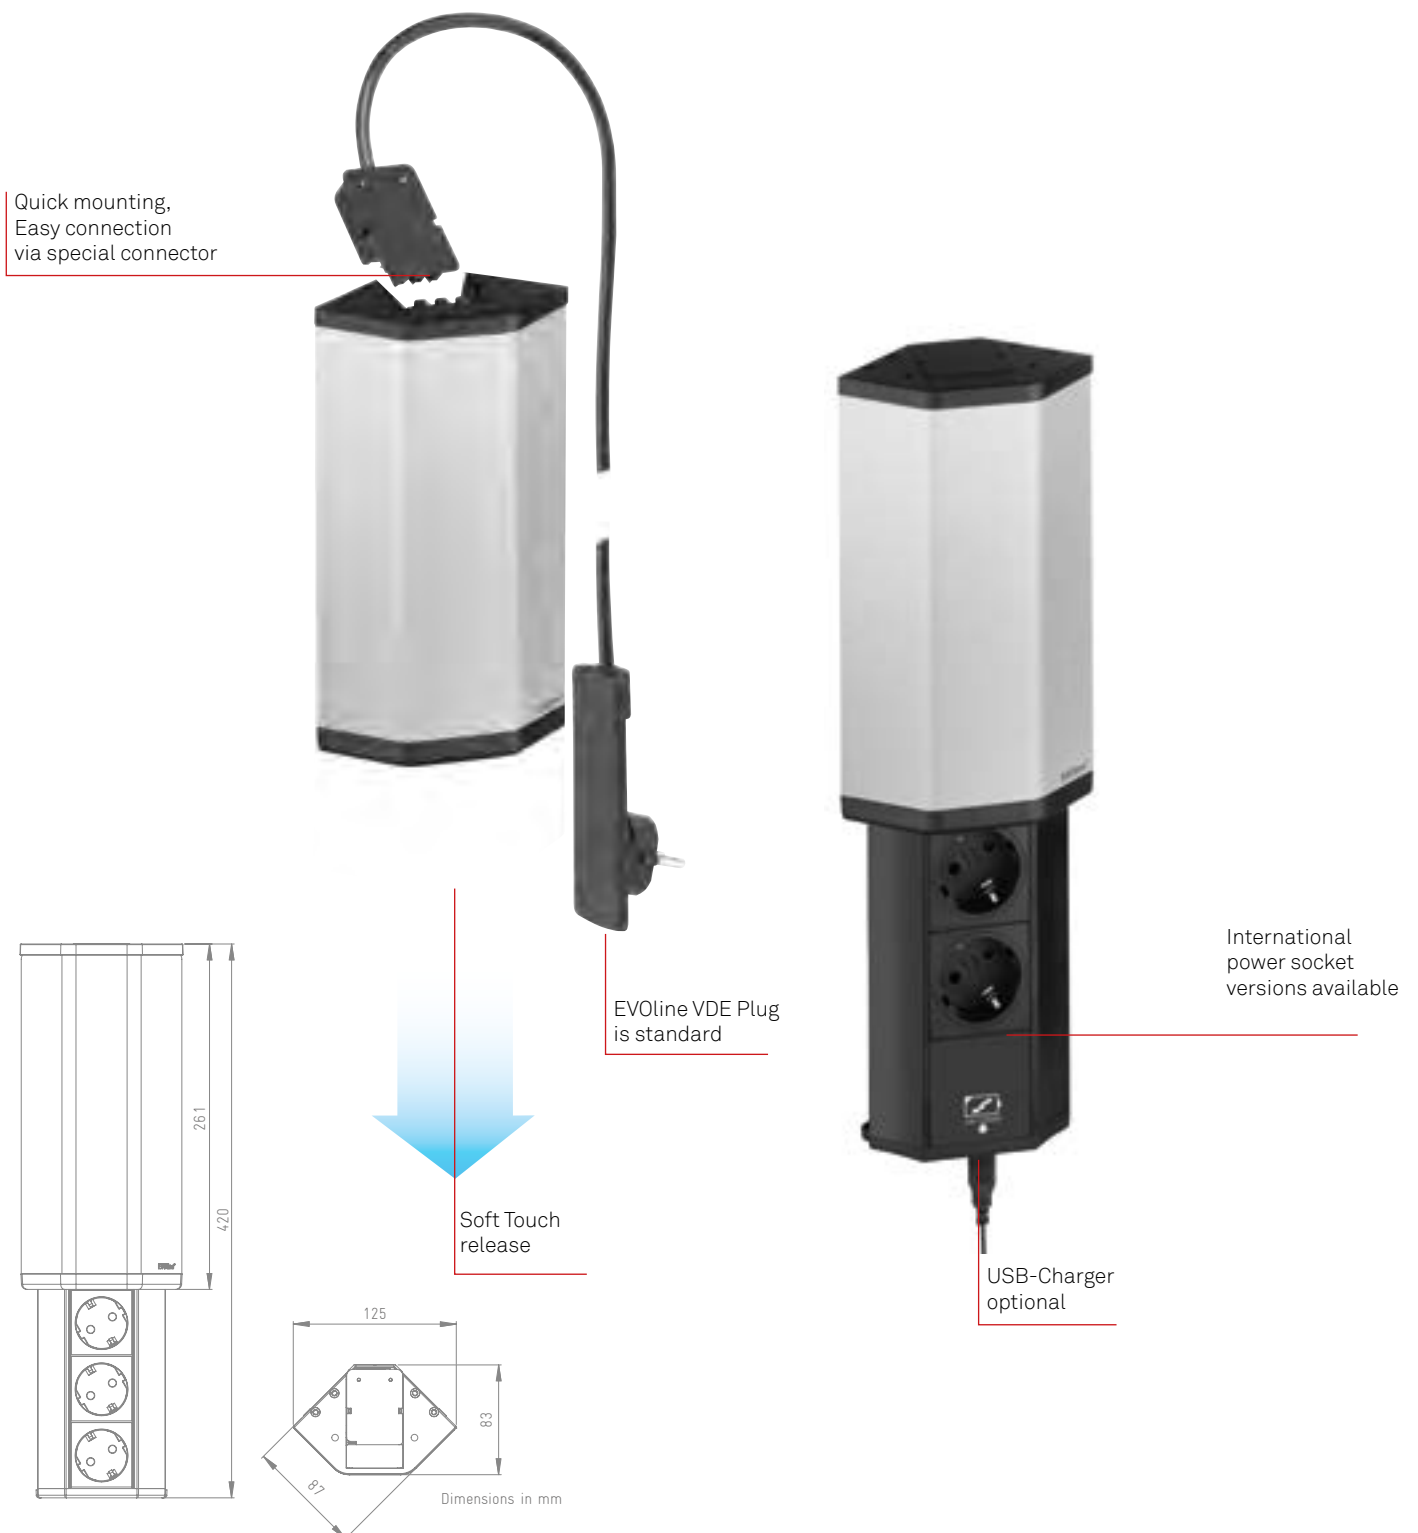

Description	Picture	Specifications	Order Number
<p>EVoline V-Port 2-gang</p> <p>Aluminium housing, black anodised, with aluminium cover in stainless steel optics, for right-angle installation. 2× VDE-compliant socket, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0200</p>
<p>EVoline V-Port 3-gang</p> <p>Aluminium housing, black anodised, with aluminium cover in stainless steel optics, for right-angle installation. 3× VDE-compliant socket, 60°, 16 A, contact-protected. Power supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0100</p>
<p>EVoline V-Port 2-gang with USB-Charger*</p> <p>Aluminium housing, black anodised, with aluminium cover in stainless steel optics, for right-angle installation. 2× VDE-compliant sockets, 60°, 16 A, contact-protected. Supply cable 2.5 m with plug-in connector. All configurations with VDE-compliant sockets with fixed EVoline Plug. Other versions with wire end ferrules and country-specific plug, supplied unattached.</p> <p>1x USB Type A Charger, rated output current: 1 A,</p>		<p>Aluminum cover in stainless steel optics</p>	<p>1593 4500 0300</p>

* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.



EVOLine® T-Dock




At home in the kitchen.


EVoline® T-Dock

The EVoline T-Dock is raised above the work surface by its solid stainless steel pillar. This gives clutter free space and creates a safe distance between power supply and potentially wet surfaces in the kitchen.



The power supply cable is routed through the stainless steel pillar which is also a high quality anti-theft device since it is firmly screwed beneath the surface.

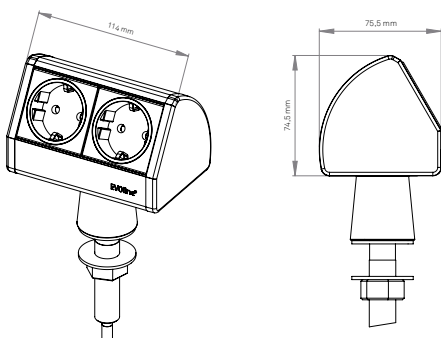

Examples for power supply of the T-Docks:

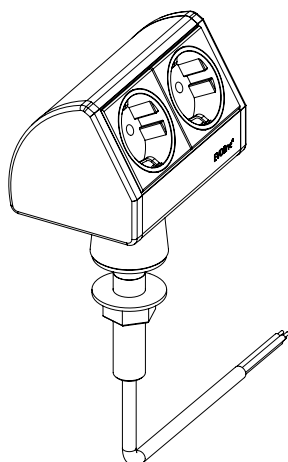


Fixed Power Supply Cable
routed through the stainless
steel pillar.

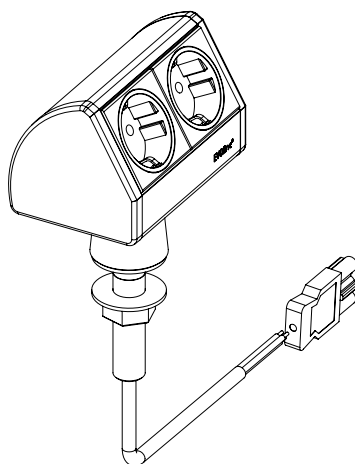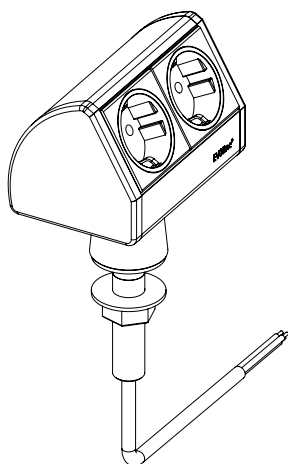



Fixed Power Supply Cable
routed through the stainless
steel pillar.

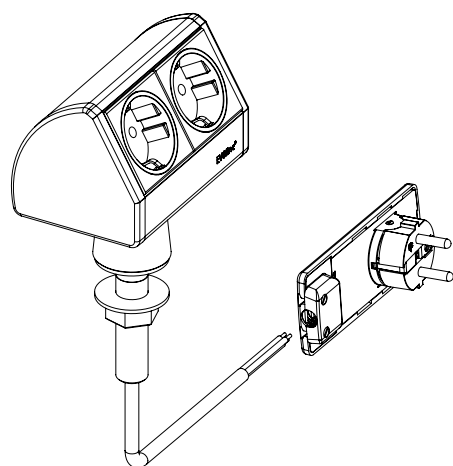Available with several country
specific plugs, EVoline Plug,
wire end ferrules,
Wieland GST 18i3- or
WAGO WINSTA Connector.



EVoline® T-Dock

Description	Picture	Specifications	Order Number
<p>EVoline T-Dock</p> <p>Aluminium housing in stainless steel optics, ALANOX®. For surface thickness up to 50 mm. Two sockets, VDE-compliant, 0°, 16 A, contact-protected. Fixed supply cable with wire end ferrules, plug supplied unattached.</p> <p>Power supply cable entry through the stainless steel pillar.</p>		<p>Plastic end caps lacquered in black</p> <p>Plastic end caps lacquered in stainless steel optics, ALANOX®</p>	<p>1593 0220 5600</p> <p>1593 0345 5600</p>
<p>EVoline T-Dock mit USB Charger</p> <p>Aluminium housing in stainless steel optics, ALANOX®. For surface thickness up to 50 mm. One socket, VDE-compliant, 0°, 16 A, contact-protected. 1x USB-Charger Type A Output voltage: 5 V DC Rated output current: 1A</p> <p>Fixed supply cable with wire end ferrules, plug supplied unattached. Power supply cable entry through the stainless steel pillar.</p>		<p>Plastic end caps lacquered in black</p> <p>Plastic end caps lacquered in stainless steel optics, ALANOX®</p>	<p>1593 0387 4600</p> <p>1593 0387 5600</p>

* The USB charging function cannot be guaranteed due to the multitude of manufacturers and devices on the market.

EVOLine® Vertical




Stable. Free standing.



EVoline® Vertical

EVoline Vertical is a free standing solution for any room. Securely fixed to a solid cast iron base, the Vertical is upright, mobile, space saving and is the ideal solution for offices, hotels or retail areas.

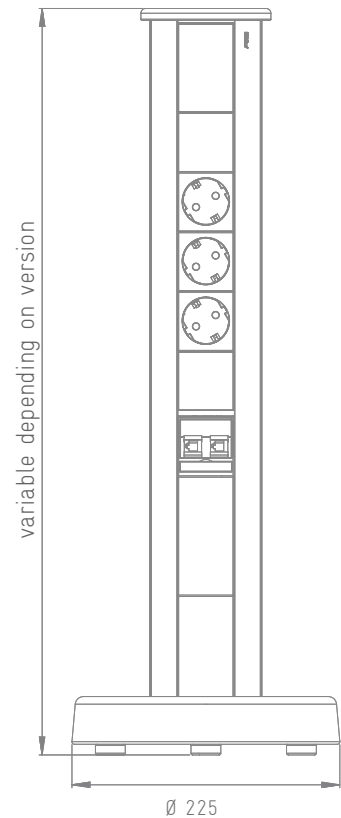The maximum height of 1.20 m makes it unnecessary to bend over to reach sockets: Power, data and multimedia modules are available at a convenient height. It can be positioned right aside a floor outlet.




Dimensions in mm

Description	Picture	Specifications	Order Number
<p>EVOLine Vertical Standard</p> <p>Aluminium housing, free standing, base made of solid cast iron, black powder-coated. 3 sockets, VDE-compliant, 60°, 16 A, contact-protected. Fixed supply cable, 3.0 m with angled plug. Two data sockets RJ 45 CAT 6 shielded each 3.0 m cable and plug. Cover made of aluminium, black powder-coated.</p> <p>Dimensions Base: Diameter \varnothing 24,5 cm Height: 4 cm</p> <p>Profile Height: 600 mm.</p>		<p>Silver anodised</p> <p>Black anodised</p>	<p>1593 4300 1100</p> <p>1593 4300 5000</p>
<p>Empty Housing EVOLine Vertical</p> <p>Aluminium housing, free standing, base made of solid cast iron, black powder-coated. Cover made of aluminium, black powder-coated.</p> <p>Dimensions Base: Diameter \varnothing 24,5 cm Height: 4 cm</p>		<p>Silver anodised</p> <p>Black anodised</p> <p>Profile height 600 mm max. profile height 1200 mm</p> <p>Profile extension > 600 mm (per 50 mm)</p>	<p>9330 8560 0000</p> <p>9330 8570 0000</p> <p>9330 0130 0000</p>



EVOLine[®] Decentralised Electrical Distribution

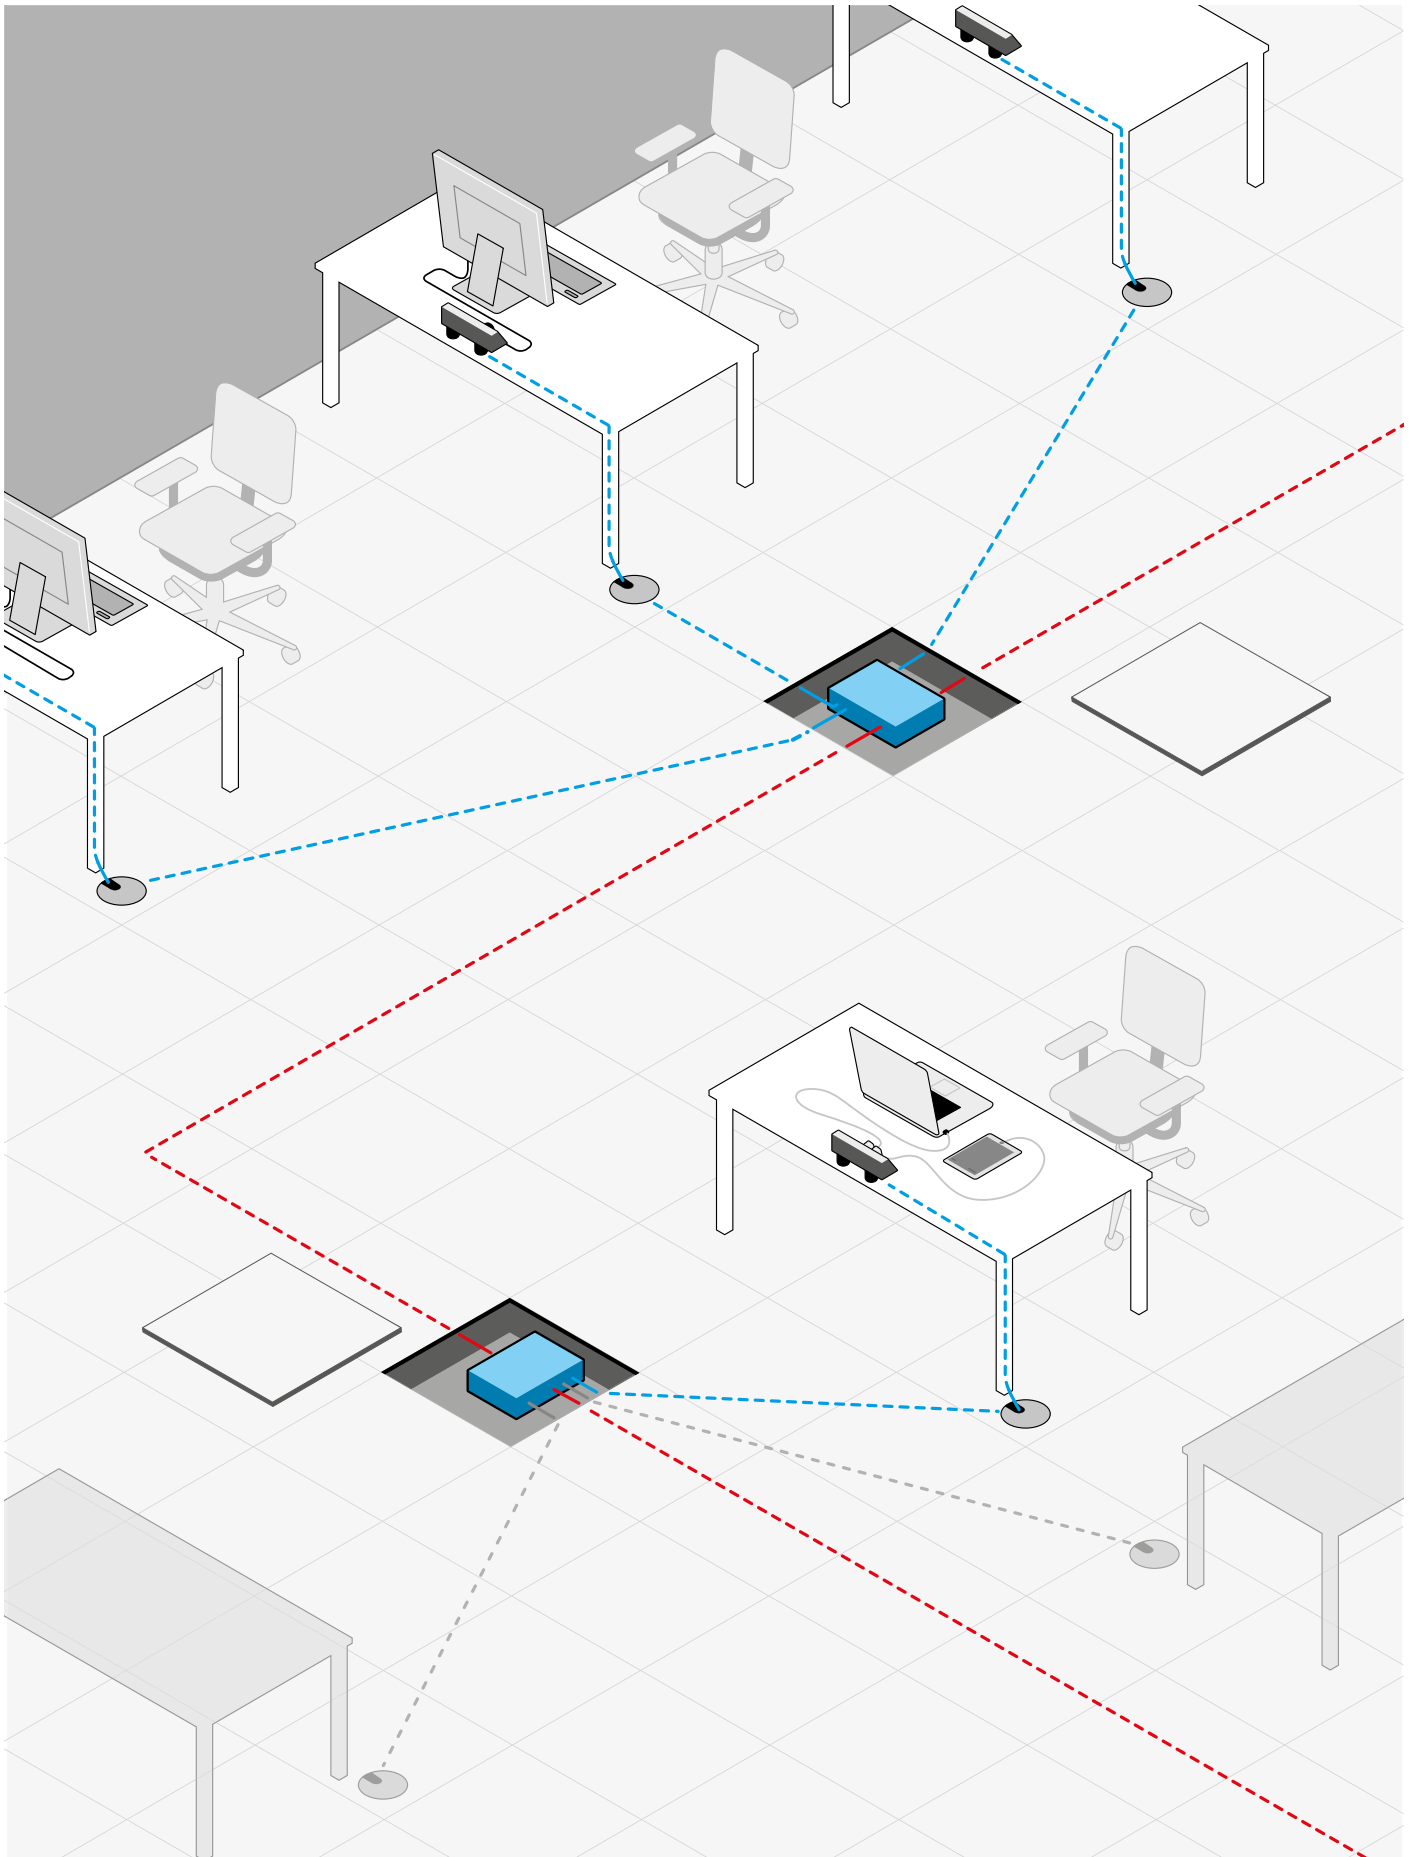


Long-term flexibility, low costs and high operational security.

EVOLine[®] Decentralised Electrical Distribution

The modern work life becomes more and more flexible. Nowadays adaptable spaces along with mobile furniture and equipment within individually created work areas are standard in many offices already. A conventional approach usually reaches its limits because of the services infrastructure.

The essential importance of a flexible power supply is often underestimated during the planning stages. Long-term consequences can often result in cable chaos with potentially fatal safety defects, questionable auxiliary structures or expensive new cable supplies.

The perfect solution: Decentralised Electrical Distribution from Schulte Elektrotechnik.

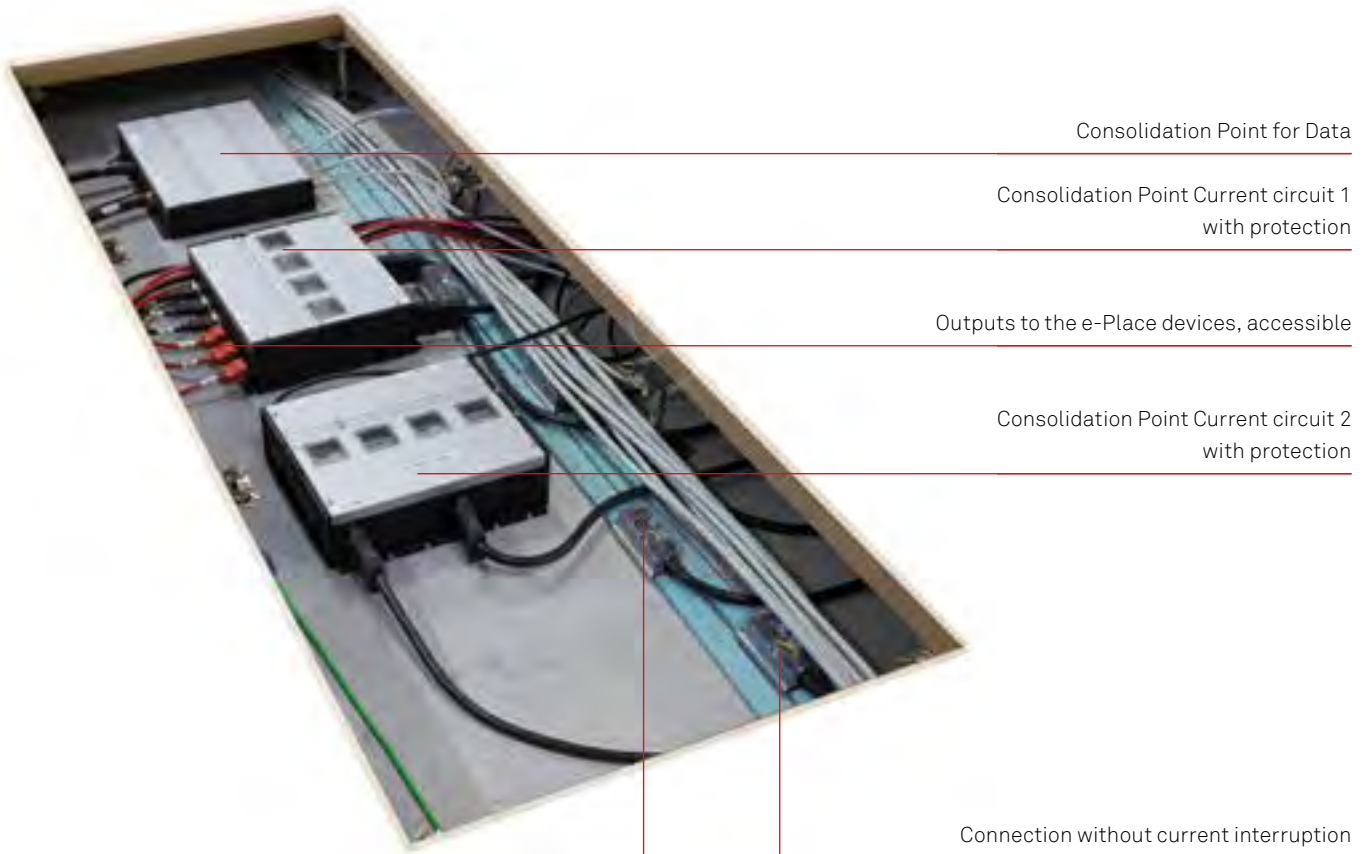


Conventional Electrical Planning

- Increased space requirements for cables
- High fire loads
- High planning costs
- Expensive installation costs
- Labour intensive installation
- Big distribution boxes
- Mandatory 'Electrics Room'


Decentralised Electrical Distribution

- + Smaller 'Electrics Room'
- + Flexibility
- + Easy to change configurations
- + Simplicity
- + Compatible with EnOcean system
- + Safety
- + Aesthetics
- + Future proof
- + Faster installation

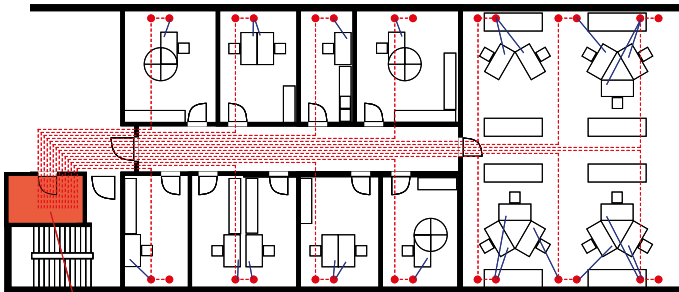


Big
Technical Room

In the office:
Conventional electrical planning

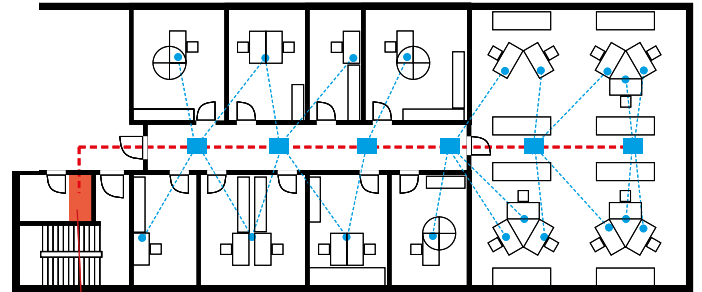


Small
switchboard

In the office:
Decentralised electrical distribution
with EVOLine Consolidation Points

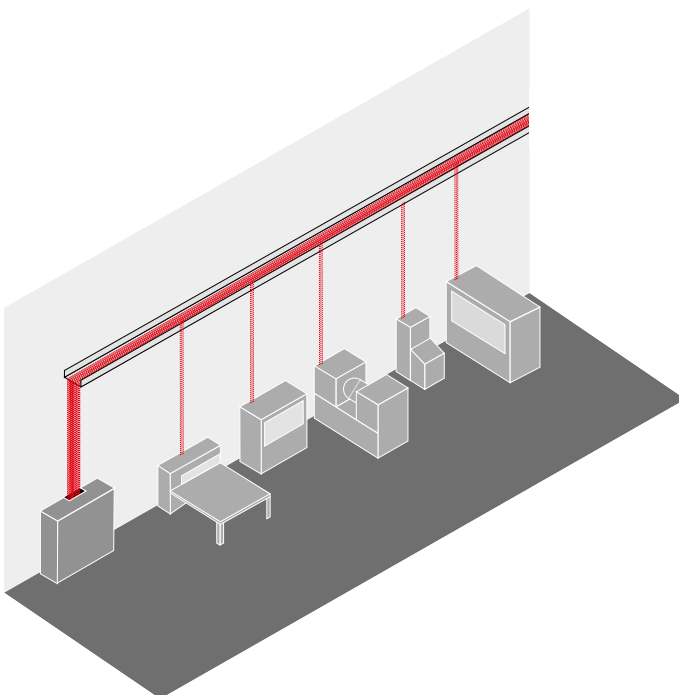


In the production:
Conventional electrical planning

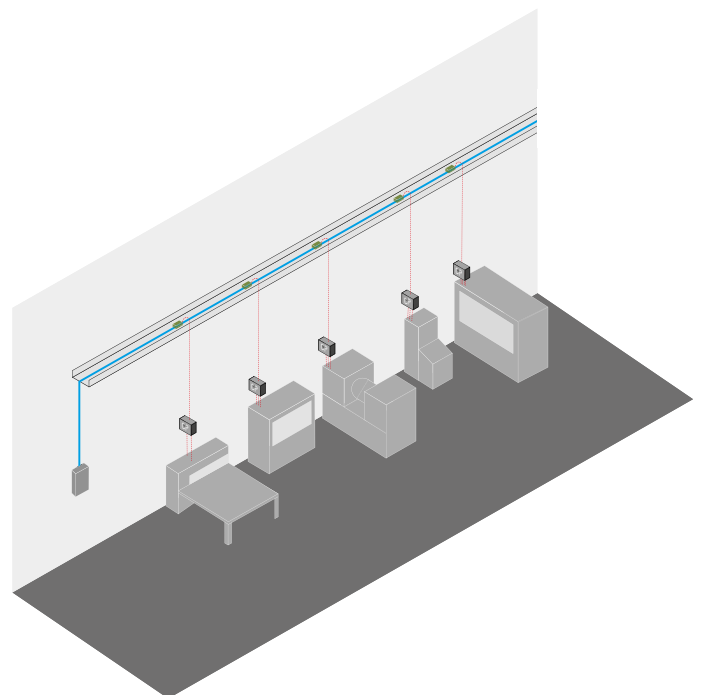

In the production:
Decentralised electrical distribution
with EVOLine Consolidation Points

EVoline[®] Consolidation Point

EVoline Consolidation Points are THE modular system for power and data distribution by Schulte Elektrotechnik. They can be customised to your application, subsequently providing flexible adaptability with marginal cost and effort.

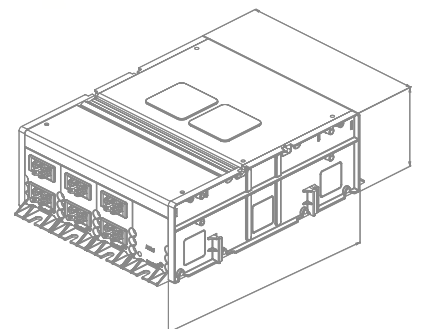

Description	Picture	Specifications	Order Number
<p>EVoline Consolidation Point Power Mini</p> <p>For the power supply of workspaces and electrical devices; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 250mm × 250 mm × 90mm</p>		<p>Input side: 1× cable gland M25</p> <p>Built-in devices: 1× RCD Rated current: 40 A Rated residual current: 30 mA</p> <p>3× MCB Rated current: 16 A Characteristic: B</p> <p>Output side: 3 × 3-pole socket (WAGO WINSTA) for the connection of electrical consumers</p>	1594 2000 2300
<p>EVoline Consolidation Point Power Maxi</p> <p>For power supply of workspaces and electrical devices; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 300mm × 250 mm × 90mm</p>		<p>Input side: 1× cable gland M25</p> <p>Built-in devices: 1× RCD Rated current: 40 A Rated residual current: 30 mA</p> <p>3× MCB Rated current: 16 A Characteristic: B</p> <p>Output side: 6× 3-pole socket and 1× 5-pole socket (WAGO WINSTA) for the connection of electrical consumers</p>	1594 2000 2400
<p>EVoline Consolidation Point Data</p> <p>For data supply of workspaces; for usage inside double or cavity floors or suspended ceilings.</p> <p>Dimensions: 260mm × 266 mm × 60mm</p>		<p>Input side: Knock-outs for data cables up to Ø 9mm</p> <p>Output side: 8× CAT6A modular coupling</p>	1594 1000 0100

EV0line[®] Modules



Endless possibilities.

EVOLine® Modules

EVOLine systems can be configured to individual needs with a wide range of modules available - there is no general solution for the supply of e-connectivity.











Often just power sockets are the sufficient configuration: in a different environment international sockets plus USB Chargers may be the right choice. With telephones, EDP and multimedia connectors options become even more diverse.

Whether a data or a HDMI connector, the individual application defines the requirements.






EVoline® Country specific socket variants

The chart below gives an overview about country specific socket versions. Deviations may occur.






Socket VDE (CEE 7/3) 230 V, 16 A		Plug Type F, E+F, C	Algeria, Andorra, Armenia, Austria, Bosnia and Herzegovina, Bulgaria, Estonia, Finland, Georgia, Germany, Hungary, Iceland, Latvia, Lithuania, Luxembourg, Macedonia, Moldova, Montenegro, Netherlands, Norway, Portugal, Romania, Russia, Serbia, South Korea, Spain, Ukraine
Socket (CEE 7/5) 230 V, 16 A		Plug Type E, E+F, C	France, Belgium, Cameroon, Czech Republic, Mali, Morocco, Poland, Slovakia, Tunisia
Socket (BS 1363) 230 V, 3,15 A oder 5 A		Plug Type G	Great Britain, Bahrain, Cyprus, Hong Kong, Indonesia, Ireland, Kenya, Kuwait, Malaysia, Malta, Mauritius, Nigeria, Oman, Qatar, Saudi Arabia, Singapore, United Arab Emirates, Zimbabwe
Socket (SEV 1011) 230 V, 10 A, T13		Plug Type J, C	Switzerland, Liechtenstein
Socket (SEV 1011) 230 V, 16 A, T23		Plug Type J, C	Switzerland, Liechtenstein
Socket (DS 608842-D1) 230 V, 13 A		Plug Type K, C	Denmark, Greenland
Socket (DS 608842-D1) 230 V, 13 A, EDV		Plug Type K EDV	Denmark, Greenland
Socket (CEI 23-16-VII) 230 V, 16 A oder 10 A		Plug Type L, C	Italy, Chile, Cuba
Socket (AS 3112) 230 V, 10 A		Plug Type I	Australia, New Zealand, Papua New Guinea, several Pacific Islands
Socket (NEMA 5-15) 120 V, 15 A		Plug Type B	USA, Canada, Cuba, Ecuador, Jamaica, Japan, Mexico, Paraguay, Peru, Philippines, Taiwan, Venezuela, various Carribean Islands

EVoline® Sockets

Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FrameDock</i> <i>/ Port</i> <i>/ Port Push</i> <i>/ Vertical</i> <i>/ V-Dock</i> <i>/ U-Dock</i> <i>/</i>
Socket 0°, 16 A Contact-protected		9330 0090 0000 black	● ● ● ● ● ●
VDE		9330 0200 0000 red	● ● ● ● ● ●
for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm		9330 3780 0000 green	● ● ● ● ● ●
		9330 5450 0000 white	● ● ● ● ● ●
		9330 5480 0000 light grey	● ● ● ● ● ●
Socket 0°, 16 A without Contact-protection		9330 6190 0000 black	● ● ● ● ● ●
VDE		9330 6220 0000 red	● ● ● ● ● ●
for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm			
Socket 0°, 16 A Contact-protected		9330 8130 0000 black socket, plastic frame lacquered in stainless steel optics (ALANOX®)	●
VDE			
for plug type: F, C, E+F * Installation dimensions: 50 x 50 mm			



* Power modules are only available completely assembled in EVoline products.

Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock

Description	Picture	Order Nr. & Specifications																																									
<p>Socket 60°, 16 A, Contact-protected</p> <p>VDE for plug type: F, C, E+F *</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1050 0000 black</p> <p>9330 1430 0000 red</p> <p>9330 3790 0000 green</p> <p>9330 5460 0000 white</p> <p>9330 5490 0000 light grey</p>	<table border="1"> <tr><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td></tr> <tr><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td></tr> <tr><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td></tr> <tr><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td></tr> <tr><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td></tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•
•	•	•	•	•	•	•	•																																				
•	•	•	•	•	•	•	•																																				
•	•	•	•	•	•	•	•																																				
•	•	•	•	•	•	•	•																																				
•	•	•	•	•	•	•	•																																				
<p>Socket 60°, 16 A without Contact-protection</p> <p>VDE for plug type: F, C, E+F *</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 6200 0000 black</p> <p>9330 6230 0000 red</p>	<table border="1"> <tr><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td></tr> <tr><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td><td>•</td></tr> </table>	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•	•																								
•	•	•	•	•	•	•	•																																				
•	•	•	•	•	•	•	•																																				
<p>Socket 60°, 16 A Contact-protected</p> <p>VDE for plug type: F, C, E+F *</p> <p>Installation dimensions: 50 x 50 mm,</p>		<p>9330 8140 0000 black socket, plastic frame lacquered in stainless steel optics (ALANOX®)</p>	<table border="1"> <tr><td>•</td><td></td><td></td><td></td><td></td><td></td><td></td><td></td></tr> </table>	•																																							
•																																											
<p>Socket 90°, 16 A Contact-protected</p> <p>VDE for plug type: F, C, E+F *</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 1260 0000 black</p> <p>9330 1050 0000 red</p> <p>9330 3800 0000 green</p>	<table border="1"> <tr><td>•</td><td>•</td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td></td></tr> <tr><td>•</td><td>•</td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td></td></tr> <tr><td>•</td><td>•</td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td></td></tr> </table>	•	•	•		•	•	•		•	•	•		•	•	•		•	•	•		•	•	•																	
•	•	•		•	•	•																																					
•	•	•		•	•	•																																					
•	•	•		•	•	•																																					
<p>Socket 90°, 16 A without Contact-protection</p> <p>VDE for plug type: F, C, E+F *</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 6210 0000 black</p> <p>9330 6240 0000 red</p>	<table border="1"> <tr><td>•</td><td>•</td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td></td></tr> <tr><td>•</td><td>•</td><td>•</td><td></td><td>•</td><td>•</td><td>•</td><td></td></tr> </table>	•	•	•		•	•	•		•	•	•		•	•	•																									
•	•	•		•	•	•																																					
•	•	•		•	•	•																																					




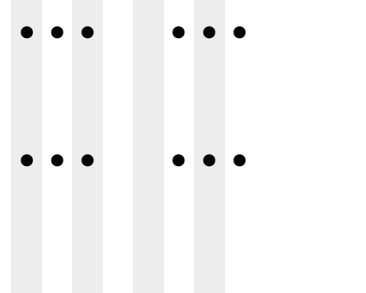

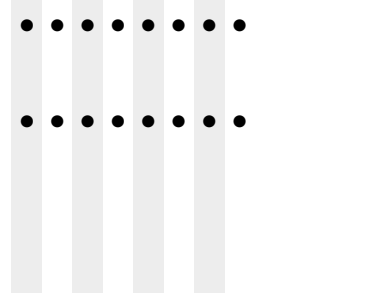

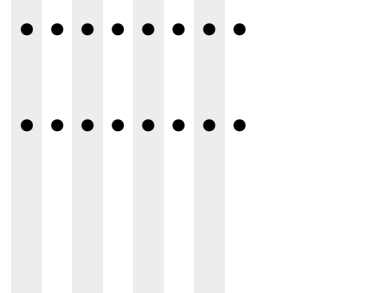
* Power modules are only available completely assembled in EVOLINE products.

EVoline® Sockets

Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FrameDock</i> <i>/ Port</i> <i>/ Port Push</i> <i>/ Vertical</i> <i>/ V-Dock</i> <i>/ U-Dock</i> <i>/</i>
<p>Socket 0°, 16 A Contact-protected,</p> <p>France, Belgium, Poland * for plug type: E, C, E+F</p> <p>Installation dimensions: 50 x 50 mm,</p> <p>black</p>		<p>9330 0250 0000 black</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p>Socket 60°, 16 A Contact-protected,</p> <p>France, Belgium, Poland * for plug type: E, C, E+F</p> <p>Installation dimensions: 50 x 50 mm,</p>		<p>9330 1060 0000 black</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>



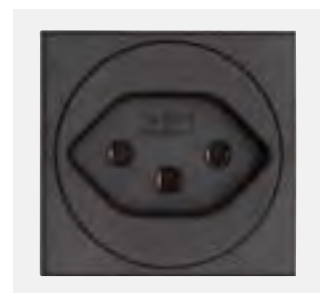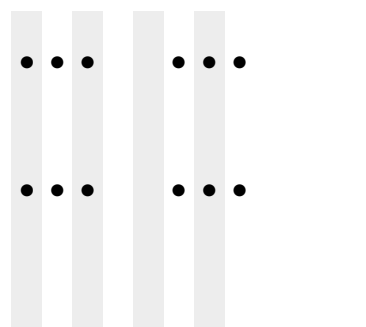


* Power modules are only available completely assembled in EVoline products.

*Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock*

Description	Picture	Order Nr. & Specifications	
<p>Socket 0°, 10 A without Contact-protection,</p> <p>Switzerland * for plug type: J, C Installation dimensions: 50 x 50 mm</p>		<p>9330 1100 0000 black</p> <p>9330 1480 0000 red</p>	
<p>Socket 0°, 16 A without Contact-protection,</p> <p>Switzerland * for plug type: J, C Installation dimensions: 50 x 50 mm</p>		<p>9330 1010 0000 black</p> <p>9330 1710 0000 red</p>	
<p>Socket 60°, 10 A without Contact-protection,</p> <p>Switzerland * for plug type: J, C Installation dimensions: 50 x 50 mm</p>		<p>9330 1110 0000 black</p> <p>9330 1490 0000 red</p>	
<p>Socket 60°, 16 A without Contact-protection,</p> <p>Switzerland * for plug type: J, C Installation dimensions: 50 x 50 mm</p>		<p>9330 1070 0000 black</p> <p>9330 1450 0000 red</p>	





* Power modules are only available completely assembled in EVOLINE products.

EVoline® Sockets

Description	Picture	Order Nr. & Specifications	<i> / Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock / </i>
<p>Socket 0°, 13 A Contact-protected, Denmark, Standard * for plug type: K, C Installation dimensions: 50 x 50 mm</p>		<p>9330 1020 0000 black</p>	<p>• • • • •</p>
<p>Socket 0°, 13 A Contact-protected, Denmark, EDV-coded * for plug type: K Installation dimensions: 50 x 50 mm</p>		<p>9330 1030 0000 black 9330 1730 0000 red</p>	<p>• • • • • • • • • •</p>
<p>Socket 60°, 13 A Contact-protected Denmark, Standard * for plug type: K, C Installation dimensions: 50 x 50 mm</p>		<p>9330 1080 0000 black</p>	<p>• • • • • • • •</p>
<p>Socket 240°, 13 A Contact-protected Denmark, Standard * for plug type: K, C Installation dimensions: 50 x 50 mm</p>		<p>9330 7190 0000 black</p>	<p>• • • • • • • •</p>
<p>Socket 0°, 10 A / 16 A Contact-protected, Italy * for plug type: L, C Installation dimensions: 50 x 50 mm</p>		<p>9331 3180 0000 black</p>	<p>• • • • • • • •</p>

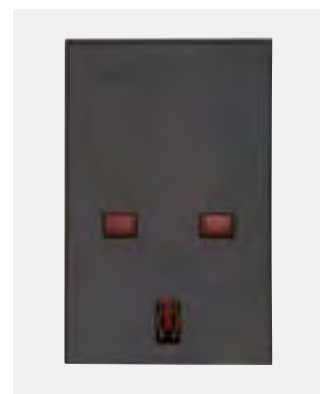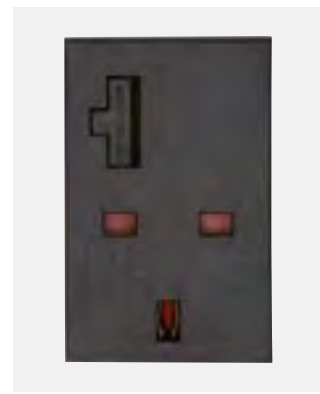


* Power modules are only available completely assembled in EVoline products.

*Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock*

Description	Picture	Order Nr. & Specifications	
<p>Socket 90°, 13 A Contact-protected</p> <p>Great Britain * without fuse, for plug type: G</p> <p>Installation dimensions: 75 x 50 mm</p>		<p>9330 4430 0000 black</p> <p>9330 4440 0000 red</p>	<p>• • • • • • • •</p> <p>• • • • • • • •</p>
<p>Socket 90° Contact-protected</p> <p>Great Britain * with integrated fuse for plug type: G</p> <p>Installation dimensions: 75 x 50 mm</p>		<p>9330 4450 0000 black; 3,15 A</p> <p>9330 4460 0000 red, 3,15 A</p> <p>9330 4470 0000 black; 5 A</p> <p>9330 4480 0000 red; 5 A</p>	<p>• • • • • • • •</p> <p>• • • • • • • •</p> <p>• • • • • • • •</p> <p>• • • • • • • •</p>
<p>Socket 30°, 13 A Contact-protected</p> <p>Great Britain * without fuse, for plug type: G</p> <p>Installation dimensions: 60 x 50 mm</p>		<p>9330 3670 0000 black</p> <p>9330 3680 0000 red</p>	<p>• • • • • • • •</p> <p>• • • • • • • •</p>
<p>Socket 30° Contact-protected</p> <p>Great Britain * with integrated fuse for plug type: G</p> <p>Installation dimensions: 60 x 50 mm</p>		<p>9330 3690 0000 black; 3,15 A</p> <p>9330 3700 0000 red; 3,15 A</p> <p>9330 3710 0000 black; 5 A</p> <p>9330 3720 0000 red; 5 A</p>	<p>• • • • • • • •</p> <p>• • • • • • • •</p> <p>• • • • • • • •</p> <p>• • • • • • • •</p>


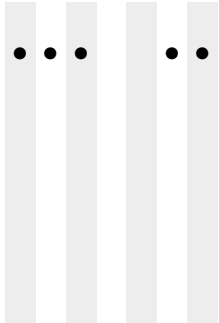

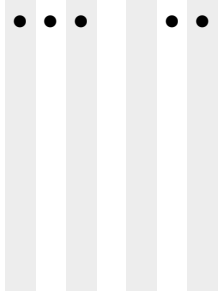

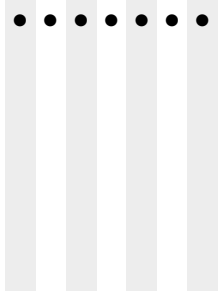
* Power modules are only available completely assembled in EVOLINE products.

Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock

Description	Picture	Order Nr. & Specifications	
<p>Socket 0°, 15 A without Contact-protection</p> <p>USA, Canada, * for plug type: B (NEMA, 5-15)</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 5360 0000 black</p> <p>9330 5390 0000 red</p>	<p>• • • • • • • •</p> <p>• • • • • • • •</p>
<p>Socket 60°, 15 A without Contact-protection</p> <p>USA, Canada, * for plug type: B (NEMA, 5-15)</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 5370 0000 black</p> <p>9330 5400 0000 red</p>	<p>• • • • • • • •</p> <p>• • • • • • • •</p>
<p>Socket 0°, 15 A Angled Outlet without Contact-protection,</p> <p>USA, Canada, * for plug type: B (NEMA, 5-15) Not suitable for angled plugs.</p> <p>Installation dimensions: 75 x 50 mm</p>		<p>9330 4030 0000 black</p> <p>9330 4420 0000 red</p>	<p>• •</p> <p>• •</p>






* Power modules are only available completely assembled in EVOLine products.

EVOLine® Sockets


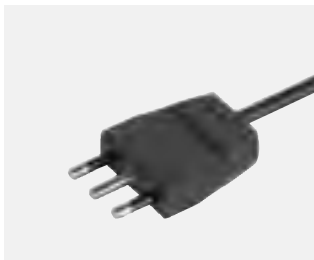

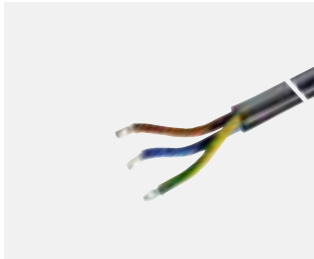

Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FrameDock</i> <i>Port</i> <i>Port Push</i> <i>Vertical</i> <i>V-Dock</i> <i>U-Dock</i> <i>/</i>
<p>Connector 16 A Wieland GST 18i3</p> <p>Socket GST 18i3 Snap-In. for current output Installation dimensions: 25 x 50 mm</p>		<p>9330 8990 0000 black</p>	
<p>Connector 16 AWAGO WINSTA MIDI</p> <p>Socket WAGO WINSTA Snap-In. for current output Installation dimensions: 25 x 50 mm</p>		<p>9330 8970 0000 black</p>	
<h2>EVOLine® Lademodule</h2>			
<p>USB Charger*</p> <p>USB Type A Charger, charging function only.</p> <p>Rated supply voltage: 100-240 V_{AC} +/- 10%. No-load power consumption at 230 V_{AC} <= 0,1 Watt. Output voltage: 5V_{DC} +/- 5%. Rated output current: 1 A</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 5580 0000</p>	

* Power USB charging function available only on the EVOLine products.




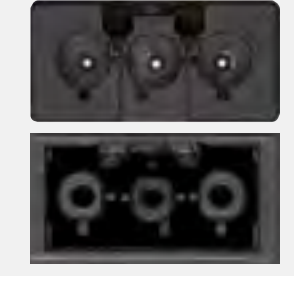
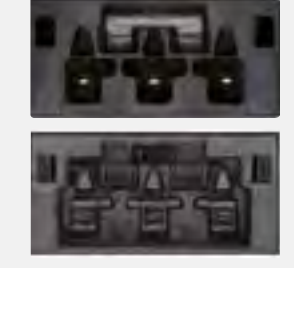
Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock
 / /




Description	Picture	Order Nr. & Specifications	
<p>Power Supply Module with cable and EVOLine PlugFix</p> <p>Type E+F i.e. Germany 16 A, 3 x 1.5 mm² Plug with extra low profile and movable plug face. Plug cannot be removed from the cable.</p>		<p>93301 0890 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • •</p>
<p>Power Supply Module with cable and angled plug</p> <p>Type E+F i.e. Germany, France, Belgium, Poland 16 A, 3 x 1.5 mm²</p>		<p>9330 2020 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • •</p>
<p>Power Supply Module with cable and plug Type J</p> <p>Type J i.e. Switzerland 3 x 1,5 mm²</p>		<p>9330 2030 0000 10 A, Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • •</p>
<p>Power Supply Module with Cable and Overload Circuit Breaker</p> <p>Plug type J i.e. Switzerland Power Supply Module with resettable overload switch 10 A 3x 1,5 mm²</p>		<p>9332 1090 0000 Cable length 3 m, black mounted to product</p> <p>Cable extension per meter</p>	<p>• • • • • • • •</p>
<p>Power Supply Module with cable and angled plug</p> <p>Type G, i.e. Great Britain 13 A, 3 x 1,5 mm²</p>		<p>9330 2070 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p>	<p>• • • • • • • •</p> <p>• • • • • • • •</p>

EVOLine® Power Supply Modules



Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / / Dock Square / / FrameDock / / Port / / Port Push / / Vertical / / V-Dock / / U-Dock /
<p>Power Supply Module with cable and angled plug</p> <p>Type K 13 A, 3 x 1.5 mm² Denmark. Standard</p>		<p>9330 2050 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p>	● ● ● ● ● ● ● ●
		<p>9330 2060 0000 Plug, not angled, EDP-coded, Cable length 3 m black</p> <p>Cable extension per meter</p>	● ● ● ● ● ● ● ●
<p>Power Supply Module with cable and Plug</p> <p>Plug Type L i.e. Italy 16 A, 3 x 1.5 mm²</p>		<p>9330 2080 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p>	● ● ● ● ● ● ● ●
<p>Power Supply Module with cable and Plug Type B</p> <p>115 V. 15 A, AWG 14 i.e. USA, Canada (UL/CSA)</p>		<p>9330 9160 0000 Cable length 3 m, black</p> <p>Cable extension on request</p>	● ● ● ● ● ● ● ●
<p>Power Supply Module with cable and ferrules</p> <p>16 A, 3 x 1.5 mm²</p>		<p>9330 9510 0000 Cable length 3 m, black</p> <p>Cable extension per meter</p>	● ● ● ● ● ● ● ●
<p>Power Supply Module with cable and GST18 plug</p> <p>16 A, 3 x 1.5 mm²</p>		<p>9330 8420 0000 Cable length 3 m, black, without lock*,</p> <p>Cable extension per meter</p>	● ● ● ● ● ● ● ●
		<p>9331 2490 0000 Cable length 3 m, black with lock</p> <p>Cable extension per meter</p>	● ● ● ● ● ● ● ●


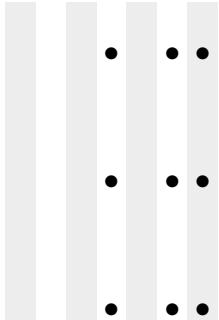

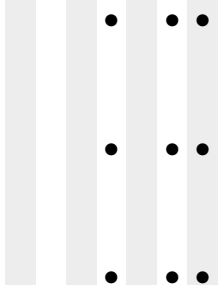
Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock

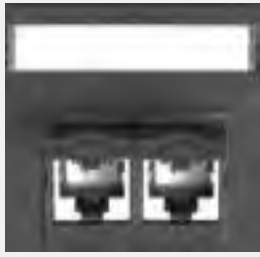
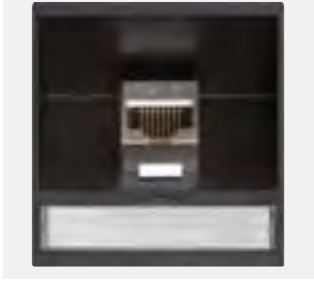
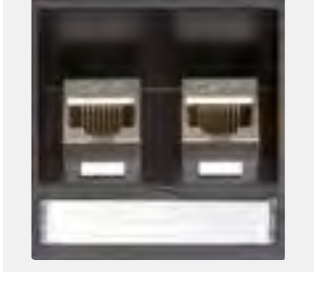
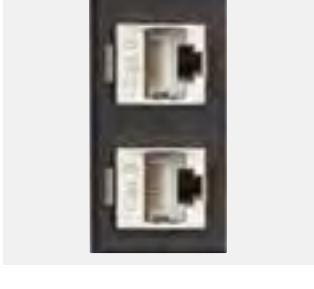

Description	Picture	Order Nr. & Specifications																	
<p>Power Output Module with cable and GST18i3 socket</p> <p>16 A, 3 x 1,5 mm²</p>		<p>9330 5810 0000 Cable length 3 m, black, without lock*,</p> <p>Cable extension per meter</p> <p>9331 2500 0000 Cable length 3 m, black , with lock</p> <p>Cable extension per meter</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●												
●	●	●	●	●	●	●	●												
<p>Power Supply Module with cable and WAGO WINSTA MIDI plug</p> <p>16 A, 3 x 1,5 mm²</p>		<p>9330 8440 0000 Cable length 3 m, black, without lock*,</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●								
●	●	●	●	●	●	●	●												
<p>Power Output Module with cable and WAGO WINSTA MIDI socket.</p> <p>16 A, 3 x 1,5 mm²</p>		<p>9330 5830 0000 Cable length 3 m, black, without lock*,</p> <p>Cable extension per meter</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●								
●	●	●	●	●	●	●	●												
<p>Connector 3-pole Wieland GST 18i3</p> <p>Installed in the end cap</p> <p>Plug GST 18 Socket GST 18</p> <p>Colour: black</p>		<p>9330 2680 0000 Power input plug</p> <p>9330 8960 0000 Power output socket</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td></td><td></td><td></td><td></td><td>●</td> </tr> <tr> <td>●</td><td>●</td><td>●</td><td></td><td></td><td></td><td></td><td>●</td> </tr> </table>	●	●	●					●	●	●	●					●
●	●	●					●												
●	●	●					●												
<p>Connector 3 pole WAGO WINSTA MIDI</p> <p>Snap-In. Installed in the end cap</p> <p>Plug WAGO WINSTA MIDI Socket WAGO WINSTA MIDI</p> <p>Colour: black</p>		<p>9330 2660 0000 Power input plug</p> <p>9330 8940 0000 Power output socket</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td></td><td></td><td></td><td></td><td>●</td> </tr> <tr> <td>●</td><td>●</td><td>●</td><td></td><td></td><td></td><td></td><td>●</td> </tr> </table>	●	●	●					●	●	●	●					●
●	●	●					●												
●	●	●					●												



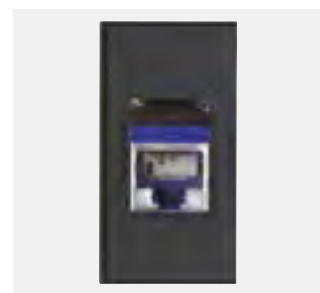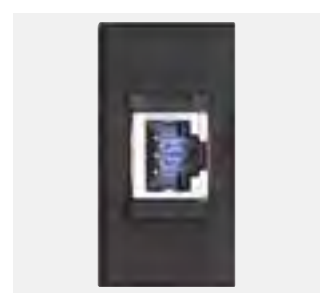

Description	Picture	Order Nr. & Specifications	<i> / Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock / </i>
<p>Data Plate with 2x Data Socket Nexans</p> <p>Removable dust caps With Labeling Field With Cable and Plug / Socket</p> <p>Installation Dimensions: 50 x 50 mm</p> <p>black Dust caps. Other colours on request.</p>		<p>9331 6350 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 6360 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p> <p>9331 6370 0000 GG45 CAT7 shielded 3 m Cable, Plug</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p>Data Plate with Data Socket Nexans</p> <p>Angled Outlet with Labeling Field</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 6380 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 6390 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p> <p>9331 6400 0000 GG45 CAT7 shielded 3 m Cable, Plug</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>
<p>Data Plate with 2x Snap-In Data Socket Nexans</p> <p>Angled Outlet with Labeling Field</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 6410 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 6420 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p> <p>9331 6430 0000 GG45 CAT7 shielded 3 m Cable, Plug</p>	<div style="display: flex; justify-content: space-around;"> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> <div style="width: 20px; height: 100%; background-color: #ccc;"></div> </div>

/ Dock / R-Dock
 / Dock Square
 / FrameDock
 / Port
 / Port Push
 / Vertical
 / V-Dock
 / U-Dock
 /

Description	Picture	Order Nr. & Specifications				
<p>Data Plate with Data Socket Nexans</p> <p>with Cable and Plug / Socket Installation Dimensions: 25 x 50 mm</p>		<p>9331 6970 0000 RJ45 CAT6 shielded 0,3 m Cable, Socket</p>	●	●		●
		<p>9331 3040 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p>	●	●		●
		<p>9331 2890 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p>	●	●		●
		<p>9331 6340 0000 GG45 CAT7 shielded 3 m Cable, Plug</p>	●	●		●
<p>Data Plate with Data Socket Reichle & De- Massari</p> <p>with Cable and Plug / Socket Installation Dimensions: 25 x 50 mm</p>		<p>9331 2150 0000 RJ45 CAT6 shielded 0,2 m Cable, Socket</p>	●	●		●
		<p>9330 8270 0000 RJ45 CAT6 unshielded 3 m Cable, Plug</p>	●	●		●
		<p>9330 7860 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p>	●	●		●
		<p>9331 0020 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p>	●	●		●

Description	Picture	Order Nr. & Specifications	<i> / Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock / </i>
<p>Data Plate Data Socket Reichle & De-Massari</p> <p>Angled Outlet with labeling field with Cable and Plug</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 2150 0000 RJ45 CAT6 shielded 0,2 m Cable, Socket (RJ45)</p> <p>9331 0010 0000 RJ45 CAT6 unshielded 3m Cable, Plug</p> <p>9330 6140 0000 RJ45 CAT6 shielded 3 m Cable Plug</p> <p>9331 0030 0000 RJ45 CAT6A shielded 3 m Cable Plug</p>	
<p>Data Plate with 2x Data Sockets Reichle & De-Massari</p> <p>Angled Outlet with labeling field, with Cable and Plug / Socket</p> <p>Installation Dimensions: 50 x 50 mm</p>		<p>9331 2590 0000 RJ45 CAT6 shielded 0,2 m Cable, Socket (RJ45)</p> <p>9330 4340 0000 RJ45 CAT6 unshielded 3m Cable, Plug</p> <p>9330 1230 0000 RJ45 CAT6 shielded 3 m Cable, Plug</p> <p>9331 0040 0000 RJ45 CAT6A shielded 3 m Cable, Plug</p>	

Description	Picture	Order Nr. & Specifications				
<p>Data Plate with Data Socket ELBRO</p> <p>Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable.</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9330 6550 0000 RJ45 CAT6 unshielded</p> <p>9330 8410 0000 (RJ45) CAT6 shielded</p> <p>9331 4080 0000 (RJ45) CAT6A shielded</p>	<p>•</p> <p>•</p> <p>•</p>	<p>•</p> <p>•</p> <p>•</p>	<p>•</p> <p>•</p> <p>•</p>	
<p>Data Plate with Data Socket ELBRO</p> <p>Angled Outlet with labeling field. Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable. Installation Dimensions: 50 x 50 mm</p>		<p>9330 6560 0000 (RJ45) CAT6 unshielded</p> <p>9330 5880 0000 (RJ45) CAT6 shielded</p> <p>9331 4090 0000 (RJ45) CAT6A shielded</p>		<p>•</p> <p>•</p> <p>•</p>	<p>• •</p> <p>• •</p> <p>• •</p>	
<p>Data Plate with 2x Data Sockets ELBRO</p> <p>Angled Outlet with Labeling Field Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable. Installation Dimensions: 50 x 50 mm</p>		<p>9330 6570 0000 (RJ45) CAT6 unshielded</p> <p>9330 3920 0000 (RJ45) CAT6 shielded</p> <p>9331 4100 0000 (RJ45) CAT6A shielded</p>		<p>•</p> <p>•</p> <p>•</p>	<p>• •</p> <p>• •</p> <p>• •</p>	
<p>Data Plate with 2x Data Sockets ELBRO</p> <p>Modular Adaptor RJ45 to RJ45 1:1 interconnected for patchcable. Angled: 90°</p> <p>Installation Dimensions: 25 x 50 mm</p>		<p>9331 4870 0000 (RJ45) CAT6, shielded</p>	<p>•</p>		<p>•</p>	
						

Description	Picture	Order Nr. & Specifications	<i> Dock / R-Dock Dock Square FrameDock Port Port Push Vertical V-Dock U-Dock </i>	Price
<p>VGA-Socket</p> <p>15 pole HDD socket with screw terminals,</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9330 0810 0000 with 3 m cable and plug</p>	<p>• • • • •</p>	77,17 €
<p>VGA-Socket</p> <p>Angled outlet with labeling field 15 pole HDD socket with screw terminals,</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 2370 0000 with 3 m cable and plug</p>	<p>• • • •</p>	77,47 €
<p>VGA- and Audio Socket</p> <p>1x VGA Connector. 15 pole HDD socket with screw terminals, 1x Stereo Jack socket 3.5 mm</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9330 7920 0000 with 3 m cables and plugs</p>	<p>• • • • •</p>	116,82 €
<p>VGA- and Audio Connector</p> <p>Angled outlet with labeling field 1x VGA Connector, 15 pole HDD socket, with screw terminals. 1x Stereo Jack socket 3.5mm</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 5370 0000 with 3 m cables and plugs</p>	<p>• • • •</p>	117,14 €

Dock / R-Dock
 Dock Square
 FrameDock
 Port
 PortPush
 Vertical
 V-Dock
 U-Dock
 /

Description


Picture

Order Nr. & Specifications

Audio Port 3.5mm

1 x Stereo Jack socket 3.5 mm

Installation dimensions:
25 x 50 mm



9330 0910 0000
with 3 m cable and plug


Dock / R-Dock	Dock Square	FrameDock	Port	PortPush	Vertical	V-Dock	U-Dock	Price
●	●			●	●	●		39,66 €
●		●			●	●	●	43,91 €

Audio Port 3.5mm

Angled outlet with labeling field.

1 x Stereo Jack socket 3.5 mm

Installation dimensions:
50 x 50 mm

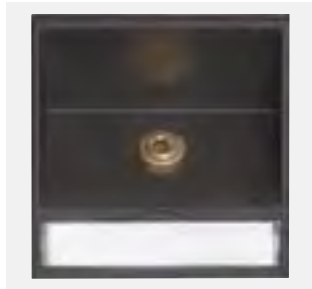


9330 2460 0000
with 3 m cable and plug



Description	Picture	Order Nr. & Specifications	Dock / R-Dock Dock Square FrameDock Port Port Push Vertical V-Dock U-Dock						
<p>DVI-I Socket</p> <p>Dual Link. 24+5 pole. for digital and analogue signals</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 7730 0000 with 0.2 m Cable and Socket</p> <p>9331 7700 0000 with 3 m Cable and Plug with 5 m Cable and Plug</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> </div>	60.22 €	130.78 €	166,66 €	62,19 €	132,81 €	168,69 €
<p>DVI-I Socket</p> <p>Dual Link. 24+5 pole. for digital and analogue signals Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 7740 0000 with 0.2 m Cable and Socket</p> <p>9331 7710 0000 with 3 m Cable and Plug with 5 m Cable and Plug</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> </div>	62,19 €	132,81 €	168,69 €	51.38 €	73.11 €	97,66 €
<p>HDMI-Socket</p> <p>HDMI 1.4 connector with gilded contacts.</p> <p>Installation dimensions: 25 x 50 mm.</p>		<p>9330 6060 0000 with 0.3 m Cable and Socket</p> <p>9330 6070 0000 with 3 m Cable and Plug with 5 m Cable and Plug</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> </div>	51.38 €	73.11 €	97,66 €	53.35 €	75,09 €	99,63 €
<p>HDMI-Socket</p> <p>Angled outlet with labeling field HDMI 1.4 connector with gilded contacts.</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 6080 0000 with 0.3 m Cable and Socket</p> <p>9330 6090 0000 with 3 m Cable and Plug with 5 m Cable and Plug</p>	<div style="display: flex; justify-content: space-between;"> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> <div style="width: 15%;"><input checked="" type="checkbox"/></div> </div>	53.35 €	75,09 €	99,63 €			





Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock
 /

Description	Picture	Order Nr. & Specifications							
<p>DisplayPort-Socket</p> <p>for digital signals DP 1.2 compliant.</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9331 7510 0000 with 0.4 m Cable and Socket</p>	●	●		●	●		51.38 €
<p>DisplayPort-Socket</p> <p>Angled outlet with labeling field for digital signals DP 1.2 compliant.</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 7520 0000 with 0.4 m Cable and Socket</p>			●	●	●	●	53.35 €
<p>USB 2.0 - Connector</p> <p>1 x USB 2.0 Type A socket for connection of USB standard consumer devices.</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9330 1040 0000 with 3 m USB Cable Plug USB 2.0 Type A</p>	●	●		●	●	●	30.16 €
<p>USB 2.0 - Connector</p> <p>Angled outlet with labeling field USB 2.0 Type A socket for connection of USB standard consumer devices.</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 2430 0000 with 3 m USB Cable Plug USB 2.0 Type A</p>			●	●	●	●	33.44 €
<p>2x USB 2.0 - Connector</p> <p>USB 2.0 Type A sockets for connection of USB standard consumer devices Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 6170 0000 with 3 m USB Cables Plugs USB 2.0 Type A</p>			●	●	●	●	53.87 €







Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /	Price
3x USB 2.0 - Connector USB 2.0 Type A socket for connection of USB standard consumer devices. Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9330 7460 0000 3 m USB Cables* Plugs USB 2.0 Type A	● ● ● ●	117,27 €
USB 3.0 - Connector USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Installation dimensions: 25 x 50 mm.		9331 8620 0000 0.2 m Cable and Socket	● ● ●	35,67 €
USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Installation dimensions: 25 x 50 mm.		9331 1450 0000 1 m USB Cable Plug USB 3 Type A	● ● ● ●	41,03 €
USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Installation dimensions: 25 x 50 mm.		3 m USB Cable Plug USB 3 Type A	● ● ● ●	41,03 €
USB 3.0 - Connector USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 8630 0000 0.2 m Cable and Socket	● ● ● ●	37,54 €
USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 1460 0000 1 m USB Cable, Plug USB 3 Type A	● ● ● ●	44,30 €
USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		3 m USB Cable Plug USB 3 Type A	● ● ● ●	44,30 €
2 x USB 3.0 - Connector USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 1470 0000 1 m USB Cables Plug USB 3 Type A	● ● ● ●	73,53 €
USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		3 m USB Cables Plug USB 3 Type A	● ● ● ●	73,53 €
3x USB 3.0 - Connector USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		9331 1480 0000 1 m USB Cables Plugs USB 3 Type A	● ● ● ●	106,03 €
USB 3.0 Type A socket for connection of USB standard consumer devices. Data rate up to 5 GBit/s Angled outlet with labeling field Installation dimensions: 50 x 50 mm		3 m USB Cables Plugs USB 3 Type A	● ● ● ●	106,03 €


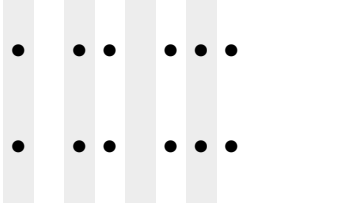
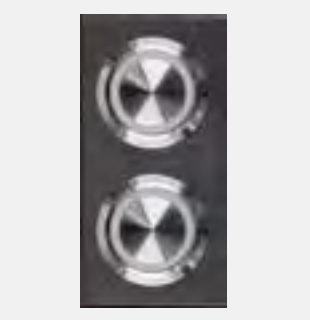
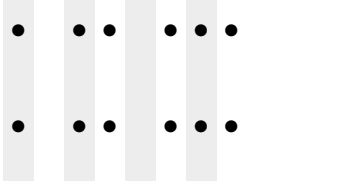

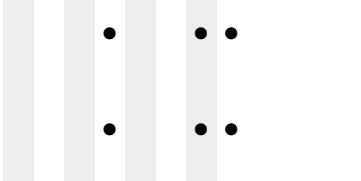

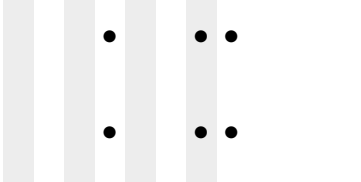
Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock
 /

Description	Picture	Order Nr. & Specifications		
<p>USB 3.1 - Connector</p> <p>USB 3.1 type C suitable for data and power supply. Max. Current: 3A.</p> <p>Installation dimensions: 15 x 50 mm</p>		<p>9331 9710 0000 0.2 m USB Cable Socket USB 3.1 Type C</p>	<div style="display: flex; justify-content: space-around;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Dock / R-Dock </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Dock Square </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> FrameDock </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Port </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Port Push </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Vertical </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> V-Dock </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> U-Dock </div> </div>	<p>● 45,20 €</p>
<p>USB 3.1 - Connector</p> <p>Angled outlet with labeling field. USB 3.1 type C suitable for data and power supply. Max. Current: 3A.</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 9870 0000 0.2 m USB Cable Socket USB 3.1 Type C</p>	<div style="display: flex; justify-content: space-around;"> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Dock / R-Dock </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Dock Square </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> FrameDock </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Port </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Port Push </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> Vertical </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> V-Dock </div> <div style="writing-mode: vertical-rl; transform: rotate(180deg);"> U-Dock </div> </div>	<p>● ● 45,20 €</p>


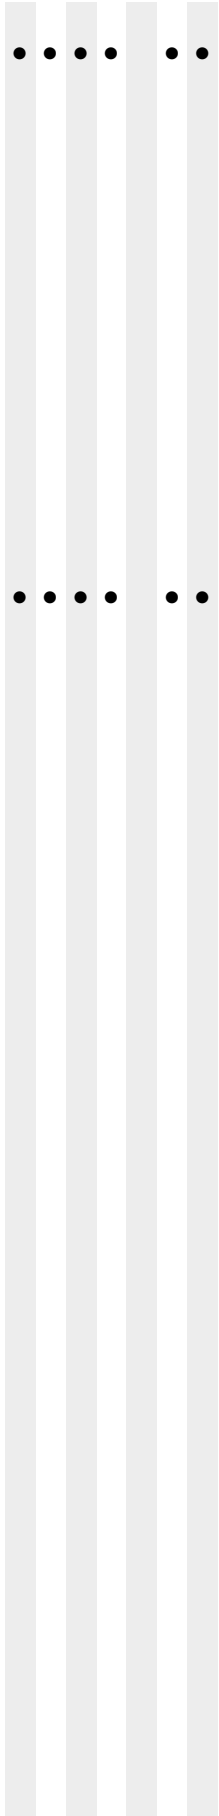
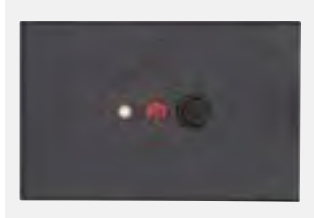
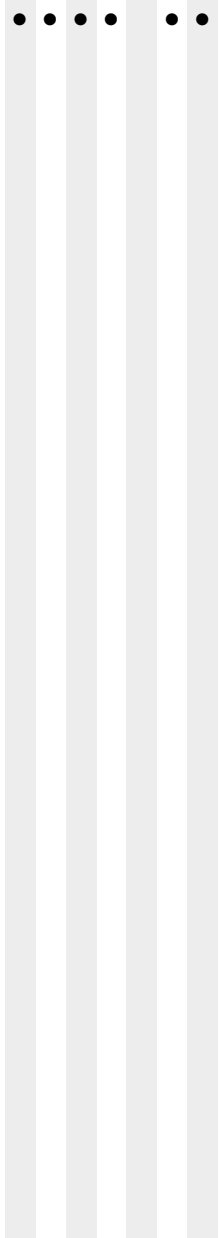
Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /	Price
<p>Audio Connector and stainless steel push-button with ring LED</p> <p>1x Stereo Jack Socket 3.5 mm 1x Push-Button Operating voltage: 24 V_{AC/DC} Operating current: 10 mA with angled outlet and labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 9490 0000</p> <p>Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p>Push-Button with 3 m Cable without plug</p>	● ● ● ●	111.23 €
<p>Audio Connector and Data Socket Reichle & De-Massari Cat. 6</p> <p>1x Stereo Jack socket 3.5 mm for audio signals 1x Data Socket with cable Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7610 0000</p> <p>Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p>Data RJ45 Cat. 6 Socket with 3 m Cable, shielded and RJ45 Plug</p>	● ● ● ●	103.96 €
<p>Audio Connector and Data Socket Elbro</p> <p>1x Modular-Adaptor RJ45 Cat. 6 shielded 1x Stereo Jack socket 3.5 mm for audio signals Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9330 7800 0000</p> <p>Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p>Data Modular-Adaptor RJ45 (without Cable)</p>	● ● ● ●	67,78 €
<p>HDMI- and Audio Socket 3.5mm</p> <p>1x HDMI 1.4 connector with gilded contacts. 1x Stereo Jack socket 3.5 mm for audio signals. Angled outlet with labeling field</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 5100 0000</p> <p>Audio Stereo Jack Socket 3.5 mm with 3 m Cable and Plug 3.5 mm</p> <p>HDMI with 3 m Cable and Plug</p>	● ● ● ●	119,00 €

EVOLine® Switches

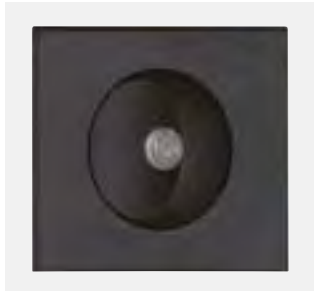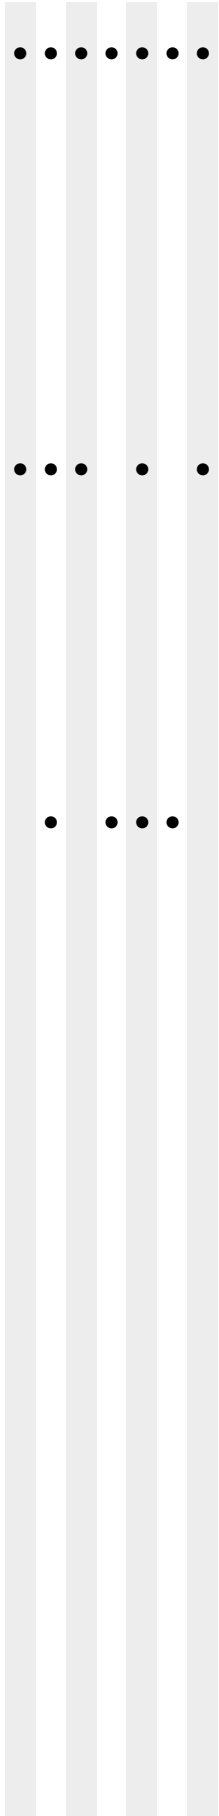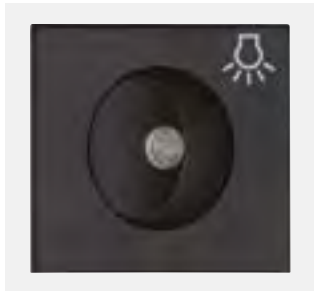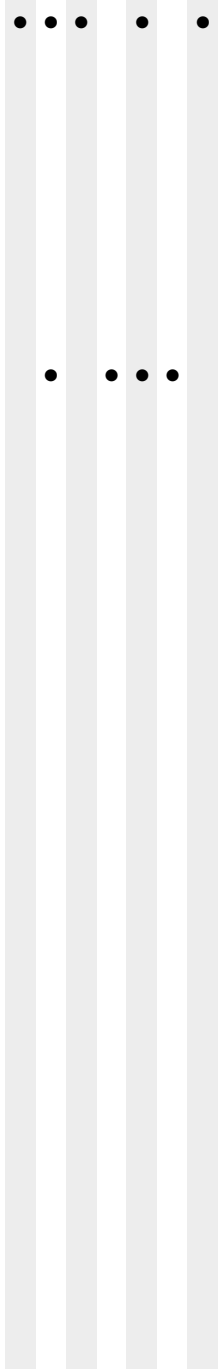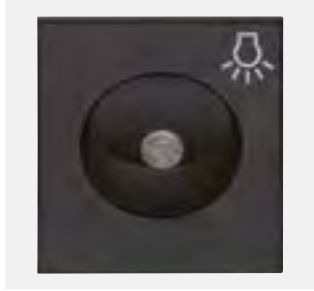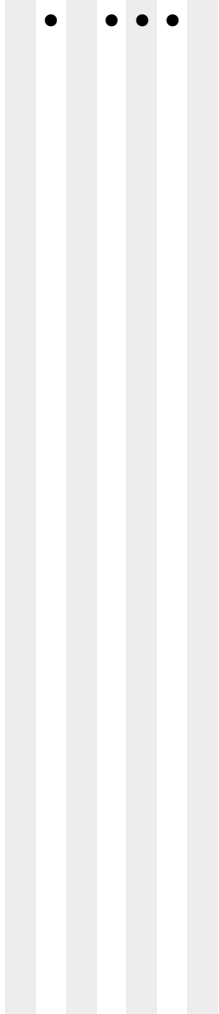



Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FrameDock</i> <i>/ Port</i> <i>/ Port Push</i> <i>/ Vertical</i> <i>/ V-Dock</i> <i>/ U-Dock</i> <i>/</i>
<p>ON / OFF switch</p> <p>illuminated in blue for various functions, i.e. switching of: - built-in sockets, - design lighting, - external sources via separate power cable</p>		9330 0010 0000	
<p>ON / OFF switch</p> <p>illuminated in blue with lamp symbol for switching of external lighting installation</p> <p>Installation dimensions: 50 × 50 mm</p>		9330 6650 0000	
<p>ON / OFF switch</p> <p>illuminated in blue with lamp symbol for switching of external lighting installation</p> <p>Installation dimensions: 50 × 50 mm</p>		9330 6660 0000	

Description	Picture	Order Nr. & Specifications	
<p>1 × Stainless steel push-button with blue ring-LED</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>Installation dimensions: 25x50 mm</p>		<p>9331 9300 0000 with Screw terminals</p> <p>9331 9240 0000 with 3 m cable and ferrules</p>	
<p>2 × Stainless steel push-button with blue ring-LED</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>Installation dimensions: 25x50 mm</p>		<p>9331 9310 0000 with Screw terminals</p> <p>9331 9250 0000 with 3 m cable and ferrules</p>	
<p>1 × Stainless steel push-button with blue ring-LED, Angled outlet</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>Installation dimensions: 50x50 mm</p>		<p>9331 9320 0000 with Screw terminals</p> <p>9331 9260 0000 with 3 m cable and ferrules</p>	
<p>1 × Stainless steel push-button with blue ring-LED, Angled outlet</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>Installation dimensions: 50x50 mm</p>		<p>9331 9330 0000 with Screw terminals</p> <p>9331 9270 0000 with 3 m cable and ferrules</p>	

EVOLine® Push-buttons

Description	Picture	Order Nr. & Specifications	<i>/ Dock / R-Dock</i> <i>/ Dock Square</i> <i>/ FrameDock</i> <i>/ Port</i> <i>/ Port Push</i> <i>/ Vertical</i> <i>/ V-Dock</i> <i>/ U-Dock</i> <i>/</i>
<p>4x Pushbutton</p> <p>closing contact 1-pole, switching capacity max. 24 V_{AC/DC}, 100 mA, potential free 4 × pushbutton, LED iluminated, LED supply voltage adjustable from 0 to 48 V, connection via screw connector</p> <p>Installation dimensions: 50 × 50 mm</p>		9331 9500 0000	
<p>Master / Slave Switch 2-pole</p> <p>controls downstream sockets (slave sockets), available only as com- bination of upstream master and downstream slave sockets</p> <p>corresponding sockets required</p> <p>Switching threshold: adjustable from 20 to 100 mA, Rated voltage: 250 V Rated current: 16 A 2-pole, protection class IP20,</p> <p>Installation dimensions: 75 × 50 mm</p>		9330 6160 0000	

Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock

Description	Picture	Order Nr. & Specifications				
<p>Residual Current Device RCD/RCCB 2-pole, characteristic B, type A, frame: black</p> <p>Installation dimensions: 100 x 50 mm</p>		<p>9330 0370 0000 Rated current: 25 A Rated fault current: 30 mA</p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>
<p>Circuit Breaker MCB 2-pole, characteristic B, frame: black</p> <p>Installation dimensions: 100 x 50 mm</p>		<p>9330 8260 0000 Rated current: 16 A Rated fault current: 10 mA</p> <p>9330 1140 0000 Rated current: 10 A</p> <p>9330 1150 0000 Rated current: 13 A</p> <p>9330 0400 0000 Rated current: 16 A</p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>
<p>Surge Protector</p> <p>With optical indicator</p> <p>Installation dimensions: 50 x 50 mm</p>		<p>9331 4770 0000 rated leakage current 1,5 kA maximum leakage current 5 kA,</p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>
<p>Overvoltage protector</p> <p>Model like WAGO WINSTA Midi or Wieland GST 18i3 Protection level $U_{P/L/N-PE}$ 1.5KV Pre-fusing max. 16A with indicator-LED</p>		<p>1599 0910 4100 Model WAGO WINSTA MIDI</p> <p>1599 0910 4000 Model Wieland GST 18i3</p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> <div style="width: 10px; height: 100%; background-color: #ccc; margin-bottom: 5px;"></div> </div>
<p>Specification Max.permanent voltage U_c : Rated voltage U_N : Combined surge U_{oc} : Protection level $U_{P/L/N-PE}$: Pre-fuse: Tripping time (L/N-PE) :</p>	<p>VDE 61643-11 255 V_{AC}/50 Hz 230 V_{AC}/50 Hz 6kV <= 1,5 kV max. 16 A < 100 ns</p>					

EVOLine® Protection Modules

Description	Picture	Order Nr. & Specifications	/ Dock / R-Dock / Dock Square / FrameDock / Port / Port Push / Vertical / V-Dock / U-Dock /																
<p>Overload Circuit Breaker*</p> <p>required for 3 sockets or more in USA, Canada, and Australia. 1-pole. Type: Sliding switch</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9330 5780 0000 USA / Canada 15 A, 125 V</p> <p>9330 5840 0000 Australien 10 A, 250 V</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●												
●	●	●	●	●	●	●	●												
<p>Overload Fuse*</p> <p>required from the 2nd outlet in Switzerland. 1 pole.</p> <p>Installation dimensions: 25 x 50 mm Colour: black</p>		<p>9331 8590 0000 Schweiz 10 A, 220 V~</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●								
●	●	●	●	●	●	●	●												
<p>Overload Circuit Breaker*</p> <p>Switch-on overload switch</p> <p>Installation dimensions: 25 x 50 mm</p>		<p>9332 1080 0000 Switzerland Fuse: 10 A, 230 V~</p> <p>9332 0380 6600 U.S.A. Fuse: 15 A, 125 V~</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●	●
●	●	●	●	●	●	●	●												
●	●	●	●	●	●	●	●												
<p>Power Supply Module with Cable and Overload Circuit Breaker</p> <p>Plug Type: J</p>		<p>9332 1090 0000 Cable length 3 m mounted to product</p>	<table border="1"> <tr> <td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td><td>●</td> </tr> </table>	●	●	●	●	●	●	●	●								
●	●	●	●	●	●	●	●												

*Only available with sockets

How to change Interchangeable Modules

Both the FlipTop *Push* and the FrameDock can be individually equipped with data- and multimedia modules.

Should the usage requirements change in the workspace over time, data modules and cable can be replaced without the Port Push, DockSquare, FlipTop *Push* or FrameDock must be removed previously. Of course you can replace the modules between the profiles. *



Releasing the interchangeable module with simple instruments like screwdrivers. Now another interchangeable module can be mounted to the System (this example: FrameDock).




Combination of Interchangeable Modules

Your usage requirements are as flexible as you are.

So that your workspace keeps tailored to you, you always can equip your system with a new interchangeable module.

Single Modules

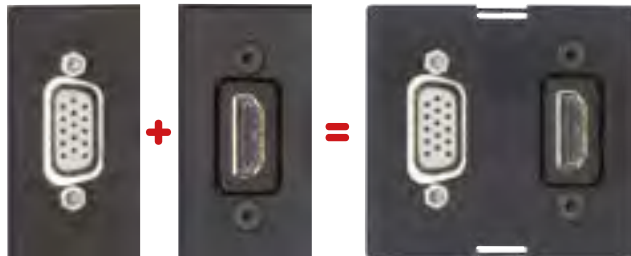


Interchangeable Modules







Examples for the configuration of the interchangeable Modules of FlipTop Push, FrameDock and Dock Square




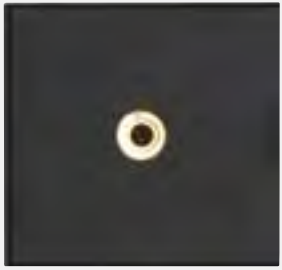




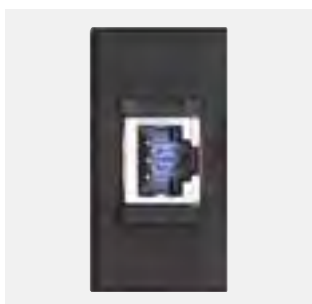







Examples for the configuration of the interchangeable Modules of Port Push





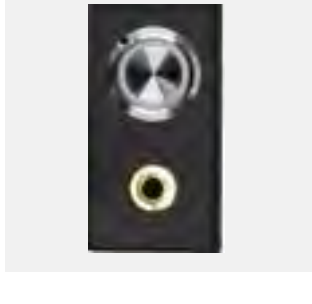



Description	Picture	Order-Nr. & Specifications				
<p>Data Plate with Data socket ELBRO Modular adapter</p> <p>RJ45 to RJ45, 1:1 interconnected for Patch cable. 1/2 Module</p>		<p>9331 9010 0000 RJ45 CAT6 unshielded socket to socket (RJ45), without cable</p> <p>9331 8090 0000 RJ45 CAT6 shielded socket to socket (RJ45), without cable</p> <p>9331 8290 0000 RJ45 CAT6A shielded socket to socket (RJ45), without cable</p>	●	●	●	●
<p>Data Plate with Data socket Nexans</p> <p>With Cable, without dust cover. 1/2 Module</p>		<p>9331 8390 0000 RJ45 Cat6 shielded with 0.3 m cable and socket (RJ45)</p> <p>9331 8080 0000 RJ45 Cat6 shielded with 3 m cable and plug (RJ45)</p> <p>9331 8370 0000 RJ45 Cat6A shielded with 3 m cable and plug (RJ45)</p> <p>9331 8380 0000 GG45 Cat7 shielded with 3 m cable and plug (GG45)</p>	●	●	●	●
<p>Data Plate with Data socket Nexans</p> <p>With Cable, without dust cover, 1/1 Module</p>		<p>9331 8390 2200 RJ45 Cat6 shielded with 0.3 m cable and socket (RJ45)</p> <p>9331 8080 2200 RJ45 Cat6 shielded with 3 m cable and plug (RJ45)</p> <p>9331 8370 2200 RJ45 Cat6A shielded with 3 m cable and plug (RJ45)</p> <p>9331 8380 2200 GG45 Cat7 shielded with 3 m cable and plug (GG45)</p>	●	●	●	
			●	●	●	
			●	●	●	
			●	●	●	

FlipTop Push
 FrameDock
 Dock Square
 Port Push

Description	Picture	Order-Nr. & Specifications	
<p>Data Plate with Data socket Reichle & De-Massari</p> <p>With Cable 1/2 Module</p>		<p>9331 8420 0000 RJ45 Cat6 shielded with 0.2 m cable and socket (RJ45)</p> <p>9331 8410 0000 RJ45 Cat6 unshielded with 3 m cable and plug (RJ45)</p> <p>9331 8070 0000 RJ45 Cat6 shielded with 3 m cable and plug (RJ45)</p> <p>9331 8400 0000 RJ45 Cat6A shielded with 3 m cable and plug (RJ45)</p>	
<p>Data Plate with Data socket Reichle & De-Massari</p> <p>With Cable, 1/1 Module</p>		<p>9331 8420 2200 RJ45 Cat6 shielded with 0.2 m cable and socket (RJ45)</p> <p>9331 8410 2200 RJ45 Cat6 unshielded with 3 m cable and plug (RJ45)</p> <p>9331 8070 2200 RJ45 Cat6 shielded with 3 m cable and plug (RJ45)</p> <p>9331 8400 2200 RJ45 Cat6A shielded with 3 m cable and plug (RJ45)</p>	

Description	Picture	Order-Nr. & Specifications	
VGA-Connector		9331 8550 0000 with socket–socket (without cable)	● ● ● ●
15 pole HDD socket with screw connector,		9331 8430 0000 with 0.2 m cable and socket	● ● ● ●
1/2 Module		9331 8100 0000 with 3 m cable and plug	● ● ● ●
VGA-Connector		9331 8550 2200 with socket–socket (without cable)	● ● ●
15 pole HDD socket with screw connector		9331 8430 2200 with 0.2 m cable and socket	● ● ●
1/1 Module		9331 8100 2200 with 3 m cable and plug	● ● ●
Audio Connector 3,5 mm 1x Stereo Jack socket 3.5 mm, for analogue signals		9331 8220 0020 with 0.2 m cable and socket	● ● ● ●
1/2-Module		9331 8220 0000 with 3 m cable and socket	● ● ● ●
		9331 8210 0000 with 0.2 m cable and plug with 3 m cable and plug	● ● ● ●
Audio Connector 3,5 mm		9331 8220 2220 with 0.2 m cable and socket	● ● ●
1x Stereo Jack socket 3.5 mm, for analogue signals		9331 8220 2200 with 3 m cable and socket	● ● ●
1/2-Module		9331 8210 2200 with 0.2 m cable and plug with 3 m cable and plug	● ● ●

Description	Picture	Order-Nr. & Specifications	
<p>Stainless steel push-button with blue ring-LED</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>1/2 Module</p>		<p>9331 8870 0000 with Screw terminals</p> <p>9331 8850 0000 with 3 m cable and wire end ferrules</p>	
<p>Stainless steel push-button with blue ring-LED</p> <p>Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA LED can be connected optional.</p> <p>1/1 Module</p>		<p>9331 8870 2200 with Screw terminals und blauer Ring-LED</p> <p>9331 8850 2200 with 3 m cable and wire end ferrules</p>	
<p>Audio Connector with stainless steel push-button with blue ring-LED</p> <p>1 x stereo jack socket 3.5 mm for audio signals 1x Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA 1/2 Module</p>		<p>9331 8880 0000 Audio with 3 m cable and plug</p> <p>Push-Button with 3 m cable</p>	
<p>Audio Connector with stainless steel push-button with blue ring-LED</p> <p>1 x stereo jack socket 3.5 mm for audio signals 1x Pushbutton, potential-free Operating voltage: 24V_{AC/DC}, Operating Current: 10mA 1/2 Module</p>		<p>9331 8880 2200 Audio with 3 m cable and plug</p> <p>Push-Button with 3 m cable</p>	
<p>HDMI-. VGA- and Audioconnector</p> <p>HDMI 1.4 socket with gilded Contacts and cable. 15 pole HDD VGA socket with cable. Stereo Jack socket with cable</p> <p>1/1-Module</p>		<p>9331 9000 0000 HDMI: 3 m cable and plug VGA: 3 m cable and plug Audio: Stereo Jack socket 3,5 mm with 3 m cable and plug</p> <p>9331 9410 0000 HDMI: 0.2 m cable and socket VGA: 0.2 m cable and socket Audio: Stereo Jack socket 3,5 mm with 0.2 m cable and socket</p>	

Description	Picture	Order-Nr. & Specifications	FlipTop Push FrameDock Dock Square Port Push
<p>Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari</p> <p>1 × Stereo Jack socket, 1 × Data socket with Cable</p> <p>1/2-Module</p>		<p>9331 8680 0000</p> <p>Audio: Connector 3,5mm with 3 m cable and plug</p> <p>Data: RJ45 CAT6 shielded with 3 m cable and plug (RJ45)</p>	
<p>Audio-Connector 3,5 mm with CAT6-Data socket Reichle & De-Massari</p> <p>1 × Stereo Jack socket, 1 × Data socket with Cable</p> <p>1/1-Module</p>		<p>9331 8680 2200</p> <p>Audio: Connector 3,5mm with 3 m cable and plug</p> <p>Data: RJ45 CAT6 shielded with 3 m cable and plug (RJ45)</p>	
<p>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</p> <p>1 × Stereo Jack socket, 1 × Modular adapter RJ45 - RJ45, 1:1 interconnected for Patch cable</p> <p>1/2 Module</p>		<p>9331 8690 0000</p> <p>Audio: Connector 3,5 mm with 3 m cable and plug</p> <p>Data: RJ45 CAT6 shielded, socket to socket (RJ45), without cable</p>	
<p>Audio-Connector 3,5 mm with CAT6-Data socket ELBRO</p> <p>1 × Stereo Jack socket, 1 × Modular adapter RJ45 - RJ45, 1:1 interconnected for Patch cable</p> <p>1/1 Module</p>		<p>9331 8690 2200</p> <p>Audio: Connector 3,5 mm with 3 m cable and plug</p> <p>Data: RJ45 CAT6 shielded, socket to socket (RJ45), without cable</p>	

FlipTop Push
 FrameDock
 Dock Square
 Port Push

Description


Picture

Order-Nr. & Specifications

**Audio-Connector 3,5mm with Cat6
 Data socket**

Nexans

1x Stereo Jack socket,
 1x Data socket with Cable
 1/2 Module

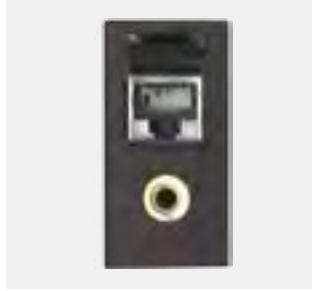

9331 9210 0000

Audio:
 Connector 3,5mm
 with 3 m cable and plug

Data:
 RJ45 CAT6 shielded
 with 3 m cable and plug (RJ45)



**Audio-Connector 3,5mm with Cat6
 Data socket**

Nexans

1x Stereo Jack socket,
 1x Data socket with Cable
 1/1 Module



9331 9210 2200

Audio:
 Connector 3,5mm
 with 3 m cable and plug

Data:
 RJ45 CAT6 shielded
 with 3 m cable and plug (RJ45)



Description	Picture	Order-Nr. & Specifications	FlipTop Push FrameDock Dock Square Port Push
DVI-I Connector Dual-Link, 24 + 5 pole , for digital and analog signals. 1/2 Module		9331 8110 0000 with 0.2 m cable and socket 9331 8440 0000 with 3 m cable and plug with 5 m cable and plug	● ● ● ● ● ● ● ●
DVI-I Connector Dual-Link, 24 + 5 pole, for digital and analog signals. 1/1 Module		9331 8110 2200 with 0.2 m cable and socket 9331 8440 2200 with 3 m cable and plug with 5 m cable and plug	● ● ● ● ● ●
HDMI-Connector HDMI 1.4 socket with gilded contacts 1/2 Module		9331 8540 0000 with socket – socket (without cable) 9331 8120 0000 with 0.3 m cable and socket 9331 8130 0000 with 3 m cable and plug with 5 m cable and plug	● ● ● ● ● ● ● ● ● ● ● ●
HDMI-Connector HDMI 1.4 socket with gilded contacts 1/1 Module		9331 8120 2200 with 0.3 m cable and socket 9331 8130 2200 with 3 m cable and plug with 5 m cable and plug	● ● ● ● ● ●


FlipTop Push
 FrameDock
 Dock Square
 Port Push

Description

Picture

Order-Nr. & Specifications

Display Port-Connector
 DP 1.2 compliant.
 for transfer of digital signals
 1/2 Module

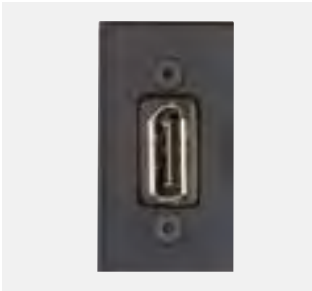





9331 8140 0000
 with 0.4 m cable and socket






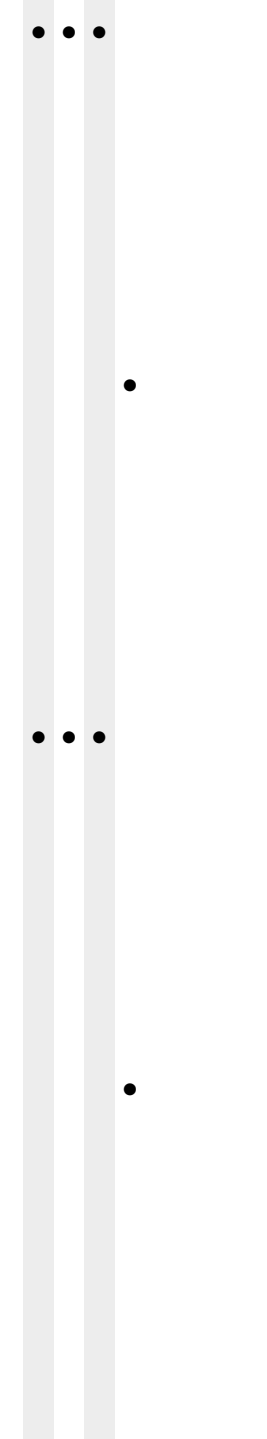



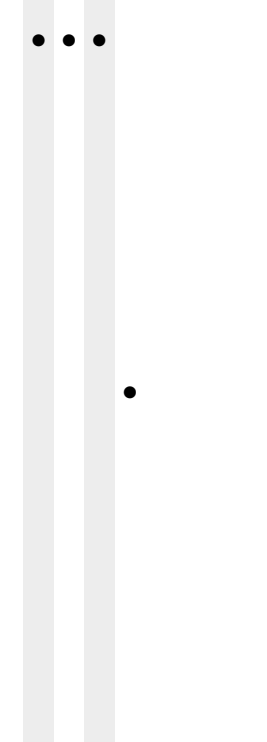


Display Port-Connector
 DP 1.2 compliant.
 for transfer of digital signals
 1/1 Module



9331 8140 2200
 with 0.4 m cable and socket

Description	Picture	Order-Nr. & Specifications	<div style="display: flex; flex-direction: column; align-items: center;"> FlipTop Push FrameDock Dock Square Port Push </div>
<p>USB-Connector 3.0 Type A</p> <p>for connection of USB standard consumer devices up to 5 GBit/s.</p> <p>1/2-Module</p>		<p>9331 8530 0000 with socket – socket Type A</p> <p>9331 8650 0000 with 0.2 m cable and socket Type A</p> <p>9331 8460 0000 with 3 m cable and plug Type A</p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; gap: 10px; margin-bottom: 10px;"> ●●●● </div> <div style="display: flex; gap: 10px; margin-bottom: 10px;"> ●●●● </div> <div style="display: flex; gap: 10px;"> ●●●● </div> </div>
<p>USB-Connector 3.0 Type A</p> <p>for connection of USB standard consumer devices up to 5 GBit/s.</p> <p>1/1-Module</p>		<p>9331 8650 2200 with 0.2 m cable and socket Type A</p> <p>9331 8460 2200 with 3 m cable and plug Type A</p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; gap: 10px; margin-bottom: 10px;"> ●●● </div> <div style="display: flex; gap: 10px;"> ●●● </div> </div>
<p>USB-Connector 3.1 Type C</p> <p>USB 3.1 type C suitable for data and power. Max. current: 3W.</p> <p>1/2 Module</p>		<p>9331 9720 0000 with 0.2 m USB cable and socket USB 3.1 Type C</p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; gap: 10px; margin-bottom: 10px;"> ●●●● </div> </div>
<p>USB-Connector 3.1 Type C</p> <p>USB 3.1 type C suitable for data and power. Max. current: 3W.</p> <p>1/1 Module</p>		<p>9331 9720 2200 with 0.2 m USB cable and socket USB 3.1 Type C</p>	<div style="display: flex; flex-direction: column; align-items: center;"> <div style="display: flex; gap: 10px; margin-bottom: 10px;"> ●●● </div> </div>

FlipTop Push
 FrameDock
 Dock Square
 Port Push

Description	Picture	Order-Nr. & Specifications	
<p>WireLane Adaptor for FlipTop Push</p> <p>to connect the WireLane to the FlipTop Push</p>		<p>9331 8700 0000 black</p>	
<p>Cable Outlet Module</p> <p>for one cable like: Patch cable, audio cable etc.</p> <p>1/1 module</p>		<p>9331 8230 0000 Empty module, without cable</p>	
<p>Cable Outlet Module for Port Push</p> <p>for one cable like: Patch cable, audio cable etc.</p>		<p>9332 0100 0000 Empty module, without cable</p>	
<p>Installation Space</p> <p>Profile to enable later insertation of additional modules.</p>		<p>9331 8300 0000 50 mm Installation Space</p>	
<p>Installation Space for EVOLine Port Push</p> <p>Profile to enable later insertation of additional modules.</p>		<p>9332 1410 0000 40 mm Installation Space</p>	

EVoline[®] Kinetics



Remote on/off control without cable or battery from a distance.

EVoline[®] Kinetics

EVoline Kinetics modules make it possible. Touching the switch with a finger generates enough energy to send an encoded wireless signal as far as 30 metres in enclosed spaces.

The EVoline receiver can be integrated into our products to switch electrical sockets. The transmitters can also be installed in EVoline products. Alternatively, they can be freely positioned with a mounting frame, minimizing costs and dirt during installation.



Dock / R-Dock
 Dock Square
 FrameDock
 Port
 Port Push
 Vertical
 V-Dock
 U-Dock
 /

Description


Picture

Order Nr. & Specifications

Kinetics Wireless Receiver

2 pole module


switching states ON/OFF,
with display switching status, green
230 V actuator with switching capa-
city of max. 16 A, switches devices
such as lights,
for EnOcean Alliance transmitters

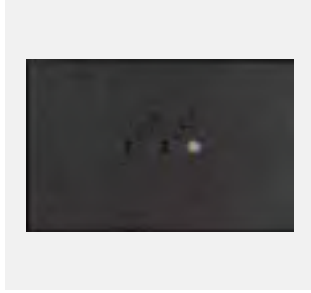

9330 6400 0000

Module may be ordered in
assembled products

installation dimensions:
75 × 50 mm

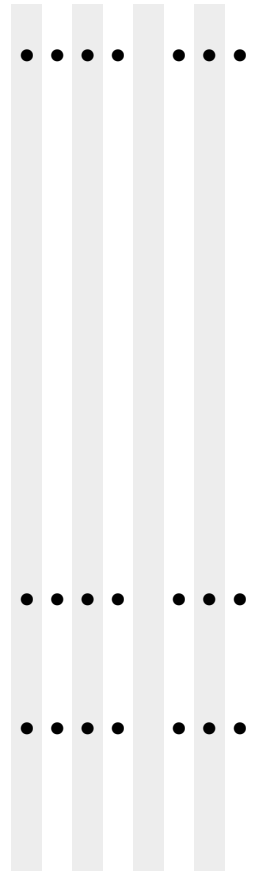

Kinetics Wireless Transmitter

Built-in module

Controls all receivers of the
EnOcean Alliance.
Range up to 30 m.



9330 6420 0000

with 1 rocker switch and
1 labeling window

9330 6410 0000

with 2 rocker switches
and 2 labeling windows

Installation dimensions:
50 × 50 mm

Kinetics Wireless Transmitter

with frame

to switch on/off
Controls all EnOcean receivers,
range up to 30 m



1599 0907 6900

with 1 rocker switch and
1 labelling window,
black frame

1599 0907 8200

with 1 rocker switch and
1 labelling window,
pure white frame

Installation dimensions:
60 × 65 mm

1599 0907 6800

with 2 rocker switch and
2 labelling window,
black frame

1599 0907 8100

with 2 rocker switch and
2 labelling window,
pure white frame



EVoline[®] Express





Cascadable. Extendable. International.

EVoline[®] Express

EVoline Express Type 910 for a consistent modular power supply provides a flexible number of power sockets. Self extinguishing plastics, sockets with contact protection and the testing of every single product before dispatch provides highest safety. Protection and switch modules are available as well.

International socket versions available. Various colours available.

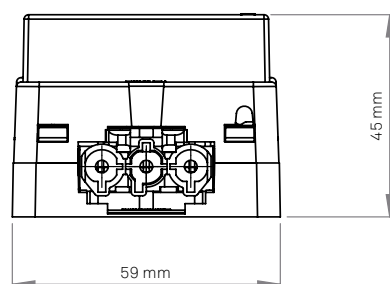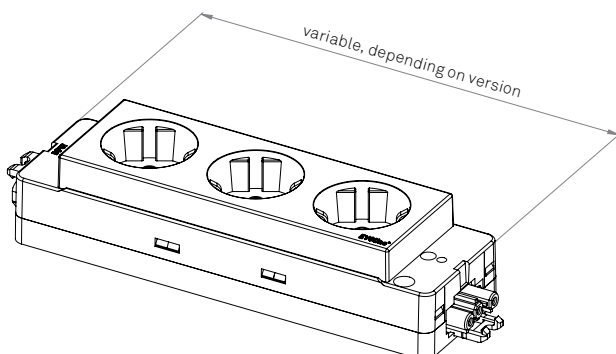

Connecting systems



Wieland GST 18i3
Plug



Wieland GST 18i3
Connector



WAGO WINSTA
Plug



WAGO WINSTA
Connector

Connectivity with EVOLine Express:





Technical Information for Express Type 910:



- Rated voltage: 250 V / 50 Hz
- Rated current: 16 A
- Halogen free housing
- Connectors for direct connection to each other (loop-through wiring)
- sockets redated through 30° (for example, allows the use of power supplies)
- Trough wiring (solid copper wire) 1.5mm²
- Low heat and high current carrying capacity through copper Contact rails
- Certified according to DIN VDE 0620-1
- Glow-wire test to IEC 60 695-2-11. Self-extinguishing. Flame retardant
- Examination: Electrical. Manufacturer's routine testing with test report
- Test Modes: earth bond test. Continuity test. High voltage test
- Nameplate with serial number and check number
- socket housing: without screws or bolts
- Mounting distance: 175mm in 3-way power strip for integration in a cable tray




EVoline® Express Type 910

Description	Picture	Specifications	Order Number
<p>EVoline Express lateral cover cap</p> <p>for screw holes (not suitable for Express Type 900 and 907)</p>		<p>Housing Colour black</p> <p>Housing Colour red</p>	<p>1591 1830 0400</p> <p>1591 1830 0500</p>
<p>EVoline Express Type 910 2 gang Power Bar</p> <p>VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A</p> <p>Dimensions (HWL):</p> <p>46 x 60 x 150 mm</p> <p>International versions available upon request.</p>		<p>Wieland GST 18</p> <p>without contact protection</p> <p>Housing Colour black</p> <p>Housing Colour red</p> <p>contact protected</p> <p>Housing Colour black</p> <p>Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection</p> <p>Housing Colour black</p> <p>Housing Colour red</p> <p>contact protected</p> <p>Housing Colour black</p> <p>Housing Colour red</p>	<p>1591 0200 0100</p> <p>1591 0200 0120</p> <p>1591 0200 0110</p> <p>1591 0200 0130</p> <p>1591 0200 0200</p> <p>1591 0200 0220</p> <p>1591 0200 0210</p> <p>1591 0200 0230</p>
<p>EVoline Express Type 910 3 gang Power Bar</p> <p>VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A</p> <p>Dimensions (HWL):</p> <p>46 x 60 x 250 mm</p> <p>International versions available upon request.</p>		<p>Wieland GST 18</p> <p>without contact protection</p> <p>Housing Colour black</p> <p>Housing Colour red</p> <p>contact protected</p> <p>Housing Colour black</p> <p>Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection</p> <p>Housing Colour black</p> <p>Housing Colour red</p> <p>contact protected</p> <p>Housing Colour black</p> <p>Housing Colour red</p>	<p>1591 0300 0100</p> <p>1591 0300 0120</p> <p>1591 0300 0110</p> <p>1591 0300 0130</p> <p>1591 0300 0200</p> <p>1591 0300 0220</p> <p>1591 0300 0210</p> <p>1591 0300 0230</p>



Description	Picture	Specifications	Order Number
<p>EVoline Express Type 910 4-fach Power Bar</p> <p>VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A</p> <p>Dimensions (HWL): 46 x 60 x 250 mm</p>		<p>Wieland GST 18</p> <p>without contact protection Housing Colour black 1591 0400 0100 Housing Colour red 1591 0400 0120</p> <p>contact protected Housing Colour black 1591 0400 0110 Housing Colour red 1591 0400 0130</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection Housing Colour black 1591 0400 0200 Housing Colour red 1591 0400 0220</p> <p>contact protected Housing Colour black 1591 0400 0210 Housing Colour red 1591 0400 0230</p>	
<p>EVoline Express Type 910 3 gang Power Bar with Switch</p> <p>VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A</p> <p>Dimensions (HWL): 46 x 60 x 250 mm</p>		<p>Wieland GST 18</p> <p>without contact protection Housing Colour black 1591 0400 1100 Housing Colour red 1591 0400 1120</p> <p>contact protected Housing Colour black 1591 0400 1110 Housing Colour red 1591 0400 1130</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection Housing Colour black 1591 0400 1200 Housing Colour red 1591 0400 1220</p> <p>contact protected Housing Colour black 1591 0400 1210 Housing Colour red 1591 0400 1230</p>	


EVoline® Express Type 910

Description	Picture	Specifications	Order Number
<p>EVoline Express Type 910 2 gang Power Bar</p> <p>VDE-compliant, halogen-free, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A</p> <p>Dimensions (HWL): 46 x 60 x 250 mm</p>		<p>Wieland GST 18</p> <p>without contact protection</p> <p>Housing Colour black 1591 0201 0100 Housing Colour red 1591 0201 0120</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection</p> <p>Housing Colour black 1591 0201 0200 Housing Colour red 1591 0201 0220</p>	
<p>EVoline Express Type 910 3 gang Power Bar</p> <p>Belgium/France halogen-free Rated voltage: 250V / 50 Hz Rated current: 16 A,</p> <p>Dimensions (HWL): 46 x 60 x 200 mm</p>		<p>Wieland GST 18</p> <p>without contact protection</p> <p>Housing Colour black 1591 0301 0100 Housing Colour red 1591 0301 0120</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection</p> <p>Housing Colour black 1591 0301 0200 Housing Colour red 1591 0301 0220</p>	
<p>EVoline Express Type 910 4-fach Power Bar</p> <p>Belgium/France halogen-free Rated voltage: 250V / 50 Hz Rated current: 16 A,</p> <p>Dimensions (HWL): 46 x 60 x 250 mm</p>		<p>Wieland GST 18</p> <p>without contact protection</p> <p>Housing Colour black 1591 0401 0100 Housing Colour red 1591 0401 0120</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection</p> <p>Housing Colour black 1591 0401 0200 Housing Colour red 1591 0401 0220</p>	
<p>EVoline Express Type 910 3 gang Power Bar with Switch</p> <p>Belgium/France halogen-free Rated voltage: 250V / 50 Hz Rated current: 16 A,</p> <p>Dimensions (HWL): 46 x 60 x 250 mm</p>		<p>Wieland GST 18</p> <p>without contact protection</p> <p>Housing Colour black 1591 0401 1100 Housing Colour red 1591 0401 1120</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection</p> <p>Housing Colour black 1591 0401 1200 Housing Colour red 1591 0401 1220</p>	


Description	Picture	Specifications	Order Number
<p>EVoline Express Type 910 2 gang Power Bar</p> <p>Switzerland halogen-free Rated voltage: 250V / 50 Hz Rated current: 10 A</p> <p>Dimensions (HWL): 46 x 60 x 150 mm</p>		<p>Wieland GST 18</p> <p>without contact protection</p> <p>Housing Colour black 1591 0203 0100 Housing Colour red 1591 0203 0120</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection</p> <p>Housing Colour black 1591 0203 0200 Housing Colour red 1591 0203 0220</p>	
<p>EVoline Express Type 910 3 gang Power Bar</p> <p>Switzerland halogen-free Rated voltage: 250V / 50 Hz Rated current: 10 A</p> <p>Dimensions (HWL): 46 x 60 x 200 mm</p>		<p>Wieland GST 18</p> <p>without contact protection</p> <p>Housing Colour black 1591 0303 0100 Housing Colour red 1591 0303 0120</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection</p> <p>Housing Colour black 1591 0303 0200 Housing Colour red 1591 0303 0220</p>	
<p>EVoline Express Type 910 4 gang Power Bar</p> <p>Switzerland halogen-free Rated voltage: 250V / 50 Hz Rated current: 10 A</p> <p>Dimensions (HWL): 46 x 60 x 250 mm</p>		<p>Wieland GST 18</p> <p>without contact protection</p> <p>Housing Colour black 1591 0403 0100 Housing Colour red 1591 0403 0120</p> <p>WAGO WINSTA MIDI</p> <p>without contact protection</p> <p>Housing Colour black 1591 0403 0200 Housing Colour red 1591 0403 0220</p>	



EVoline® Express Type 900 / 901





Description	Picture	Specifications	Order Number
<p>EVoline Express Type 900 3 gang Power Bar</p> <p>Rated voltage: 250V / 50 Hz Rated current: 16 A, Dimensions (HWL): 40 x 58 x 220 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p>	<p>1590 0100 1500 1590 0100 1600</p>
<p>EVoline Express Type 901 3 gang Power Bar</p> <p>Rated voltage: 250V / 50 Hz Rated current: 16 A,</p> <p>Dimensions (HWL): 39 x 59 x 186 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p>	<p>1590 1100 1500 1590 1100 1600</p>







Description	Picture	Specifications	Order Number
<p>EVoline Express Type 911 2 gang Power Bar</p> <p>Great Britain with on/off switches Dimensions (HWL): 39 x 59 x 186 mm</p>		<p>Wieland GST 18</p> <p>Housing colour black Single fuse 3.15 A and Ground terminal</p>	<p>1591 1100 2500</p>
<p>Optional:</p> <ul style="list-style-type: none"> - with other single fuses - with 200mm ground conductor - with 3.15A oder 5A fuse - without switch 		<p>Housing Colour red Single fuse 3.15 A and Ground terminal</p>	<p>1591 1100 2600</p>
		<p>Housing Colour black Single fuse 5 A and Ground terminal</p>	<p>1591 2100 2500</p>
		<p>Housing Colour red Single fuse 5 A and Ground terminal</p>	<p>1591 2100 2600</p>

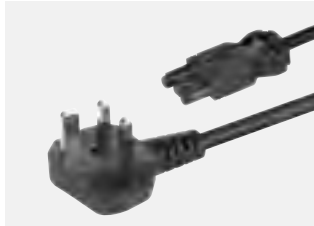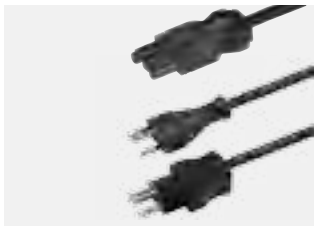EVoline® Express Protection Modules

Description	Picture	Specifications	Order Number
<p>EVoline Express Interference Filter</p> <p>with integrated overvoltage protection.</p> <p>Rated voltage $U_N 230 V_{AC/50 Hz}$</p> <p>Rated discharge current 8/20 $I_{N/Total}$ 5 kA / 15 kA</p> <p>Protection level $U_{PL/N}$ $\leq 1,3$ kV</p> <p>Protection level $U_{PL/NPE}$ $\leq 1,5$ kV</p> <p>Dimensions (HWL): 39 × 59 × 188 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 0112 7500 1592 0112 7600 1592 0112 7700 1592 0112 7800</p>
<p>EVoline Express RCD</p> <p>Residual current device switch</p> <p>25 A, sensivity 30 mA with plug and socket</p> <p>Dimensions (HWL): 90 × 59 × 159 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 2110 4500 1592 2110 4600 1592 2110 4700 1592 2110 4800</p>
<p>EVoline Express MCB</p> <p>Circuit protection switch</p> <p>16 A, Characteristic B 2-pole with plug and socket</p> <p>Dimensions (HWL): 90 × 59 × 159 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 2110 3500 1592 2110 3600 1592 2110 3700 1592 2110 3800</p>
<p>EVoline Express MCB</p> <p>Circuit protection switch</p> <p>10 A, Characteristic B 2-pole with plug and socket</p> <p>Dimensions (HWL): 90 × 59 × 159 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 2110 2500 1592 2110 2600 1592 2110 2700 1592 2110 2800</p>

Description	Picture	Specifications	Order Number
<p>EVoline Express 3 gang ICE Power Socket</p> <p>10 A, according to ICE 320 / sheet C13</p> <p>Dimensions (HWL): 39 x 59 x 186 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black Housing Colour red</p> <p>WAGO WINSTA MIDI</p> <p>Housing Colour black Housing Colour red</p>	<p>1592 0110 4500 1592 0110 4600</p> <p>1592 0110 4700 1592 0110 4800</p>
<p>EVoline Express Type 907 3 gang Power Bar</p> <p>VDE-compliant, for plug types: F, E+F, C rated voltage: 250 V / 50 Hz. rated current: 16 A, 2 x telephone/data sockets RJ45 CAT 6</p> <p>Dimensions (HWL): 46 x 55 x 175 mm</p>		<p>Wieland GST 18</p> <p>Housing Colour black RJ45, CAT6 shielded</p>	<p>1590 7300 6500</p>

Description	Picture	Specifications	Order Number
<p>EVoline Express Power Cord Germany, Austria, France with Angled plug and socket connector</p>		<p>GST 18 (Connector)</p> <p>Cable length 3 m Cable length 4 m Cable length 5 m</p>	<p>6590 0603 0500 6590 0604 0500 6590 0605 0500</p>
<p>Colour: black</p>		<p>WAGO WINSTA (Connector)</p> <p>Cable length 3 m Cable length 4 m Cable length 5 m</p>	<p>6590 0903 0100 6590 0904 0100 6590 0905 0100</p>
<p>EVoline Express Power Cord Germany, Austria, France with Angled plug and socket connector</p>		<p>GST 18 (Connector)</p> <p>Cable length 3 m</p>	<p>1590 0603 0600</p>
<p>Colour: red</p>		<p>WAGO WINSTA (Connector)</p> <p>Cable length 3 m</p> <p>Sonderlengthn ab 100 Stück auf Anfrage</p>	<p>1590 0903 0200</p>
<p>EVoline Express Power Cord Great Britain, 13 A with Angled plug and socket connector</p>		<p>GST 18 (Connector)</p> <p>Cable length 3 m</p>	<p>6591 1603 0500</p>
<p>Colour: black</p>		<p>WAGO WINSTA (Connector)</p> <p>Cable length 3 m</p>	<p>1591 1903 0100</p>
<p>EVoline Express Power Cord Switzerland with safety plug and socket connector</p>		<p>GST 18 (Connector)</p> <p>Cable length 3 m, 10A Cable length 3 m, 16A</p>	<p>1590 0623 0500 1590 0663 0500</p>
		<p>WAGO WINSTA (Connector)</p> <p>Cable length 3 m, 10A Cable length 3 m, 16A</p>	<p>1590 0923 0100 1590 0963 0100</p>






Description	Picture	Specifications	Order Number
EVoline Express Connecting cable		Cable 3 x 1,5 mm ² , black Length - 1 meter (Minimum 0,2 meter)	9331 7920 0000
		Cable 3 x 1,5 mm ² , red Length - 1 meter (Minimum 0,2 meter)	9331 7930 0000
		Plug GST 18 Connector GST 18	9331 7940 0000 9331 7960 0000
		Plug WAGO WINSTA MIDI Connector WAGO WINSTA MIDI	9331 7950 0000 9331 7970 0000
		Plug GST 18 Connector GST 18	1599 0907 7000 1599 0905 9000
		Plug WAGO WINSTA MIDI Connector WAGO WINSTA MIDI	1599 0910 9500 1599 0910 9600

EVOLine® Express Distribution System

Description	Picture	Specifications	Order Number
<p>Distributor</p> <p>1x Input, Plug 3-pole 2x Output, Connector 3-pole, with Lock, without Mounting clip Colour: black</p>		<p>Wieland GST 18 T-Shape Voltage 250 V, 25 A</p>	6599 0905 2200
		<p>WAGO WINSTA Midi, T-Shape Voltage 250 V, 25 A</p>	6599 0906 9100
<p>Distributor</p> <p>1x Input, Plug 3-pole 2x Output, Connector 3-pole, with Lock, without Mounting clip Colour: black</p>		<p>Wieland GST 18, flat Shape Voltage 250 V, 20 A</p>	6599 0906 8300
		<p>WAGO WINSTA Midi, h-Shape Voltage 250 V, 25 A</p>	6599 0906 9200
<p>Distributor</p> <p>1x Input, Plug 3-pole 3x Output, Connector 3-pole, with Lock, without Mounting clip Colour: black</p>		<p>Wieland GST 18 Voltage 250 V, 20 A</p>	6599 0905 2300
		<p>WAGO WINSTA Midi Voltage 250 V, 25 A</p>	6599 0906 9400

Description	Picture	Specifications	Order Number
<p>Distributor</p> <p>1x Input, Plug 3-pole 5x Output, Connector 3-pole, with lock, without Mounting clip</p>		<p>Wieland GST 18 Voltage 250 V, 20 A</p>	6599 0905 2400
		<p>WAGO WINSTA Midi Voltage 250 V, 25 A</p>	6599 0906 9600
<p>Distributor</p> <p>1x Input, Plug 3-pole 3x Output, Connector 3-pole, with Lock, with Mounting clip Colour: black</p>		<p>Wieland GST 18 Voltage 250 V, 20 A</p>	6599 0904 6200
<p>Distributor</p> <p>1x Input, Plug 3-pole 5x Output, Connector 3-pole, with Lock, with Mounting clip Colour: black</p>		<p>Wieland GST 18 Voltage 250 V, 16 A</p>	6599 0904 5100
<p>Y-Cable Distributor</p> <p>1x Input, Plug 3-pole, GST18 2x Output, Connector 3-pole, GST18 with Lock, without Mounting clip Length: 300 mm Colour: black</p>		<p>Wieland GST 18 Voltage 230 V, 16 A</p>	6599 0906 6600
<p>Mounting bracket</p> <p>for fixing the distributors</p>		WAGO WINSTA	6599 0906 9700

EVoline® Express Accessoires

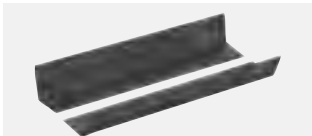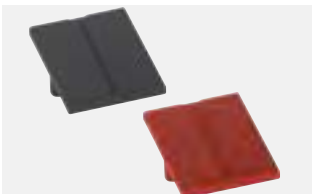Description	Picture	Specifications	Order Number
EVoline Rail For under desk installation, for the EVoline Express range. Black plastic brackets. Black aluminium profiles		2 black plastic brackets with 2 aluminium profiles Profile length 165 mm (für 3 gang) Profile length 215 mm (für 4-fach)	1593 5400 0300 1593 5400 0400
		Individuell 1 black plastic brackets for EVoline Express	9331 6230 0000
		1 pair of Aluminium profiles per 100 mm	9331 6210 0000
EVoline Express Module Connector for a safe connection of plugged EVoline modules (for Express 901/910/911)		black rot	1591 1830 0100 1591 1830 0200
EVoline Express GST18 latches Free cable connections snap-on for jacks or suitable plugs. According to approvals a locking must be provided.		black	1599 0909 6700

EV0line[®] Cable Management



Source to desk cable management.






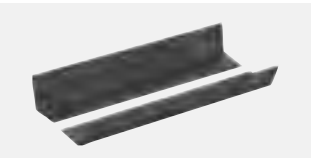
EVoline[®] Cable Management





EVoline Cable Management organises and consolidates cables and ensures health and safety requirements in office spaces. The Bridge-System provides individual solutions for almost any request.





Connectors, 90° angled module, T-module and cross module allow cable routing on the floor as required, The vertical module is perfect for the clean transition between walls and furniture.

EVoline Wirelane provides a clean cable routing and can be connected to the EVoline Bridge via an available adaptor.

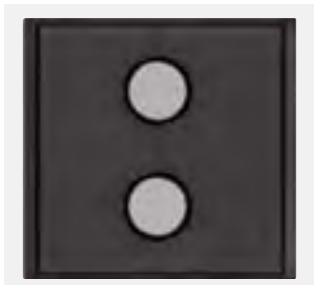

Description	Picture	Specifications	Order Number
<p>EVOLine Rail</p> <p>For under desk installation, the EVOLine Rail is available for the EVOLine U-Dock and EVOLine Express range.</p> <p>Bespoke profile lengths available upon request.</p>		<p>for EVOLine U-Dock</p> <p>2 black plastic brackets with 2 aluminium profiles</p> <p>Profile length 150 mm Profile length 300 mm Profile length 500 mm</p>	<p>1593 5400 0700 1593 5400 0100 1593 5400 0200</p>
		<p>3 black plastic brackets with 4 aluminium profiles</p> <p>Profile length 2 x 300 mm Profile length 2 x 400 mm</p>	<p>1593 5400 0500 1593 5400 0600</p>
		<p>For EVOLine Express</p> <p>2 black plastic brackets with 2 aluminium profiles</p> <p>Profile length 165 mm (for 3-gang) Profile length 215 mm (for 4-gang)</p>	<p>1593 5400 0300 1593 5400 0400</p>
		<p>Individuell</p> <p>1 black plastic brackets for EVOLine Express</p>	<p>9331 6230 0000</p>
		<p>1 black plastic brackets for EVOLine U-Dock</p>	<p>9331 6220 0000</p>
		<p>1 Pair Aluminium profiles per 100 mm</p>	<p>9331 6210 0000</p>

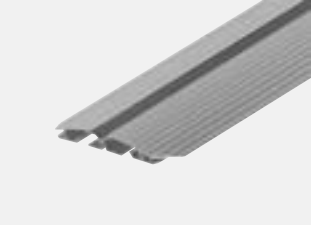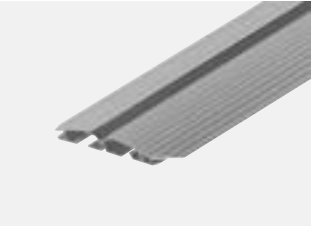Description	Picture	Specifications	Order Number
<p>Cable Passage EVoline Port</p> <p>Aluminium housing, silver anodised. For surface thickness up to 50 mm. Without modules. Mounting hole \varnothing 102 mm.</p>		<p>Rocking cover and collar made of silver lacquered plastic</p> <p>Rocking cover and collar made of black lacquered plastic</p> <p>Rocking cover made of solid stainless steel in CD-look, collar made of plastic, painted to match</p>	<p>1593 1002 5301</p> <p>1593 1003 2601</p> <p>1593 1003 2701</p>
<p>Cable Outlet-Modul</p> <p>1 cable passage</p> <p>Cables are able to be easily adjusted and stored through the inserts.</p> <p>installation dimensions: 50 × 50 mm</p>		<p>\varnothing 8mm</p> <p>\varnothing 12mm</p> <p>\varnothing 17mm</p> <p>Other \varnothing on request</p>	<p>9331 3790 0000</p> <p>9331 0560 0000</p> <p>9331 1670 0000</p>
<p>Cable Outlet-Modul</p> <p>2 cable passages</p> <p>Cables are able to be easily adjusted and stored through the inserts.</p> <p>Installation dimensions: 50 × 50 mm</p>		<p>\varnothing 8mm</p> <p>\varnothing 12mm</p> <p>Other \varnothing on request</p>	<p>9331 3800 0000</p> <p>9331 1930 0000</p>
<p>Cable Guide-Modul</p> <p>for EVoline Port</p> <p>Clamp for 3 cables.</p> <p>\varnothing 2 × 8 mm, 1 × 12 mm</p> <p>Colour: black</p> <p>Installation dimensions: 25 × 50 mm</p>			<p>9331 3600 0000</p>

Description	Picture	Specifications	Order Number
<p>EVoline Bridge</p> <p>cable cover made of aluminium for screw fixing, with black trim, without screws</p>		<p>4 CableClips Length: 500 mm Length: 800 mm Length: 1.200 mm</p> <p>8 CableClips Length: 1.600 mm Length: 2.000 mm</p>	<p>1593 5010 5000 1593 5010 8000 1593 5011 2000 1593 5011 6000 1593 5012 0000</p>
<p>EVoline Bridge</p> <p>cable cover made of aluminium for screw fixing, with black trim, without screws</p>		<p>4 CableClips Length: 500 mm Length: 800 mm Length: 1.200 mm</p> <p>8 CableClips Length: 1.600 mm Length: 2.000 mm</p>	<p>1593 5020 5000 1593 5020 8000 1593 5021 2000 1593 5021 6000 1593 5022 0000</p>
<p>EVoline WireLane</p> <p>under desk cable channel made of plastic One package consists of 3 pieces, 250-330 mm each.</p> <p>The elements can be linked and separated.</p>		<p>Colour: black Colour: lightgray</p>	<p>6593 5201 0000 6593 5211 0000</p>
<p>EVoline WireLane Strain Relief</p> <p>in black plastic, with two clamps for cable</p>			<p>6593 5290 0100</p>



EVoline® Bridge Module

Description	Picture	Specifications	Order Number
Bridge Module Arc 90°* includes 4 Fixing bolts			1593 5090 0600
Bridge Module T* includes 6 Fixing bolts			1593 5090 0500
Bridge Module Kreuz* includes 8 Fixing bolts			1593 5090 0200
Bridge Module Adapter WireLane* can also be used as end piece.			1593 5090 0100
Bridge Module Vertikal*			1593 5090 0400
Bridge Verbindungen* 2 Pieces			1593 5090 0300

* Be retrofitted to all EVoline Bridges already delivered

Description	Picture	Specifications	Order Number
<p>EVoline ClableFlex</p> <p>Plastic tube for cables. Black, including tool</p>		<p>Ø 15 mm, Length 50 m Ø 20 mm, Length: 30 m Ø 25 mm, Length: 20 m</p>	<p>6593 5300 0100 6593 5310 0100 6593 5320 0100</p>
<p>EVoline CableFlex</p> <p>Insertion tool</p>		<p>Ø 15 mm Ø 20 mm Ø 25 mm</p>	<p>6593 5390 0100 6593 5390 0200 6593 5390 0300</p>

EVOLine® Floor Outlet

Description	Picture	Specifications	Order Number
<p>Empty Floor Outlet</p> <p>cable passage for installation in double and cavity floors, cover with bracket for EVOLine WireLane.</p>	 A cylindrical, light gray floor outlet with a black cover on top.	<p>black lightgray</p>	<p>1594 9000 0000 1594 9100 0000</p>
<p>Installation dimensions: Ø 125 mm</p>			
<p>Floor Outlet with electrical socket insert</p>	 A cylindrical, light gray floor outlet with a black cover on top and a black cable connected to the side.	<p>Cover black Cover lightgray</p>	<p>1594 9000 0100 1594 9100 0100</p>
<p>VDE-compliant, black, with contact protection, with 3.0 m cable and plug GST18, cover with bracket for EVOLine WireLane</p>			
<p>Gray function insert.</p>			
<p>Installation dimensions: Ø 125 mm</p>			
<p>individual components to be ordered separately</p>			
<p>various country specific versions (different electrical socket inserts) available upon request</p>			

EVOnline® Accessories




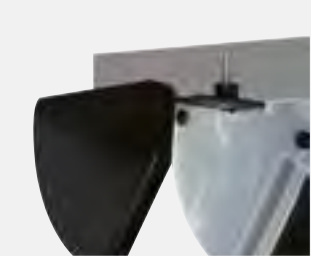









Custom-made






EVOLine[®] Accessories

There is a variety of fixings and mounting accessories available for use with EVOLine connectivity systems. Whether for a simple power and data unit or a customised individual item the available options provide secure fixing solutions with effortless installation.



Description	Picture	Specifications	Order Number
<p>Mounting Clamp</p> <p>twist-proof including non-slip covering Colour: black</p> <p>for profiles: Dock, U-Dock, R-Dock</p>		<p>Span width 8 - 40 mm Span width 8 - 40 mm, 2 items Span width 40 - 75 mm Span width 40 - 75 mm, 2 items</p>	<p>1599 0902 1200 1599 0902 0500 1599 0902 1300 1599 0902 1000</p>
<p>Mounting Clamp</p> <p>twist-proof including non-slip covering Colour: white</p> <p>for profiles: Dock, U-Dock, R-Dock</p>		<p>Span width 8 - 40 mm Span width 8 - 40 mm, 2 items Span width 40 - 75 mm Span width 40 - 75 mm, 2 items</p>	<p>1599 0909 3300 1599 0909 5600 1599 0909 3900 1599 0909 5700</p>
<p>Stainless Steel Mounting Clamp</p> <p>twist-proof desk clamp for EVoline profiles, installed and secured with allen screws</p> <p>For profiles: Dock, U-Dock, R-Dock</p>		<p>For Tabletops - width 25 mm</p>	<p>1599 0909 1500</p>
<p>Mounting set</p> <p>for under cabinet installation</p> <p>consists of two EVoline Dock brackets with wood screws</p> <p>screw: 3.5 x 15 mm</p>			<p>1599 0903 8300</p>
<p>Mounting set</p> <p>for desk installation</p> <p>consists of two EVoline Dock brackets with wing nut screws</p> <p>screw: M4 x 40 mm</p>			<p>1599 0903 8200</p>

Description	Picture	Specifications	Order Number
<p>Stainless Steel Pillar</p> <p>high quality anti-theft device for EVoline Dock consisting of: stainless steel sleeve, screw, nut, washer and rubber seal for profiles: Dock, R-Dock, U-Dock</p>		<p>Material : Stainless steel</p> <p>for surface thickness up to 50 mm</p>	<p>1599 0906 0700</p>
<p>Angle Profile</p> <p>for fixing of EVoline V-Dock</p>		<p>Length: 100 mm</p> <p>Length: 60 mm</p>	<p>1599 0908 4400</p> <p>1599 0909 6400</p>
<p>EVoline Quicklock Pro</p> <p>fixing system with a concealed cable channel and 2 fasteners, for surface thickness of 18 to 32 mm, installation without tools, fasteners with protective underlay</p> <p>for profiles: EVoline Dock, EVoline R-Dock</p>		<p>Length: 100 mm</p> <p>length: 150 mm includes bracket for EVoline WireLane connection</p> <p>length: 200 mm includes bracket for EVoline WireLane connection</p>	<p>1599 0910 8500</p> <p>1599 0910 8300</p> <p>1599 0910 8400</p>
<p>Mounted on product</p> 	<p>profile min. length: 100 mm</p> <p>price unit: 100 mm</p>	<p>9331 6700 0000</p>	
	<p>Fastening element</p>	<p>9332 0300 0000</p>	
	<p>WireLane bracket usable from 150 mm profile length</p>	<p>9331 6720 0000</p>	

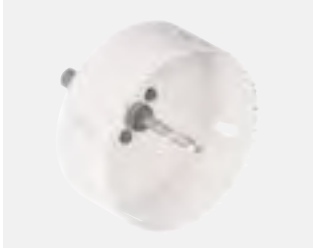Description	Picture	Specifications	Order Number
<p>Double Sided Strip for EVoline Dock Square</p> <p>2× Double Sided Strips Removable without residue.</p>			9332 1050 0000
<p>EVoline Rubber gasket</p> <p>fits under the collar of the EVoline Port.</p>			1599 0903 9100
<p>EVoline Laptop Secure</p> <p>Sturdy mounting lug for commercial laptop anti-theft devices. Such as Kensington Lock.</p>		<p>Die-cast, silver-colored Length: 41 mm Breite: 9 mm Höhe: 22 mm</p>	9331 3140 0000
<p>EVoline Laptop Secure</p> <p>Sturdy attachment loop for stan- dard laptop theft protection Such as Kensington Lock.</p>		Silver-colored	9331 6030 0000
<p>EVoline Hole Saw</p>		<p>Mounting hole Ø 102 mm</p> <p>Mounting hole Ø 80 mm</p>	<p>1599 0901 7000</p> <p>1599 0910 1000</p>

Schulte Elektrotechnik GmbH & Co KG

Jüngerstraße 21
58515 Lüdenscheid

Telefon +49 23 51 / 94 81 - 0
Fax +49 23 51 / 4 26 58
e-mail info@schulte.com
Internet www.evoline.com

